

## FEATURES

- 4.7V to 40V operating input range
- 600mA output current
- Up to 93% efficiency
- High efficiency (>78%) at light load
- Internal Soft-Start
- 2MHz switching frequency
- Input under voltage lockout
- Available in SOT23-6 package
- Current run-away protection
- Short circuit protection
- Thermal protection

## APPLICATIONS

- Distributed Power Systems
- Automotive Systems
- High Voltage Power Conversion
- Industrial Power Systems
- Battery Powered Systems


## DESCRIPTION

The BL9341 is a current mode monolithic buck switching regulator. Operating with an input range of 4.7V~40V, the BL9341 delivers 600mA of continuous output current with two integrated N-Channel MOSFETs. The internal synchronous power switches provide high efficiency without the use of an external Schottky diode. At light loads, the regulator operates in low frequency to maintain high efficiency and low output ripple. Current mode control provides tight load transient response and cycle-by-cycle current limit.


The BL9341 guarantees robustness with short-circuit protection, thermal protection, current run-away protection, and input under voltage lockout.

The BL9341 is available in 6-pin SOT23-6 package, which provides a compact solution with minimal external components.

## TYPICAL APPLICATION

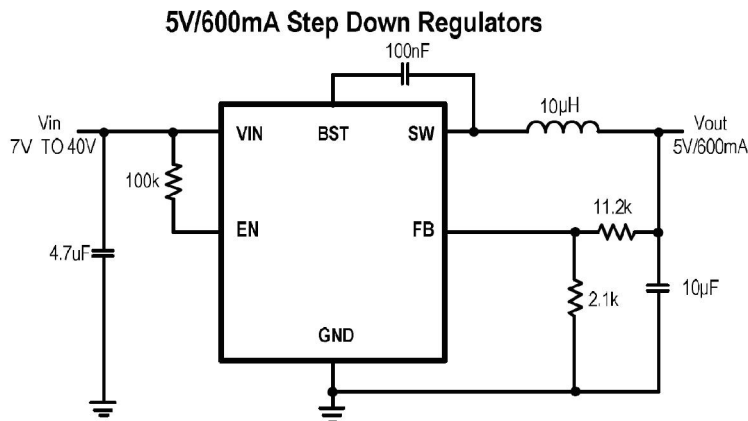


**Efficiency @ Vout=5V**

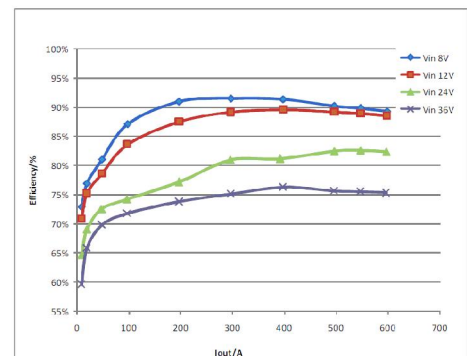

## ORDER INFORMATION

Part Number	Package	Top Marking	Packing
BL9341	SOT23-6	BL9341	3000pcs/Tape & Reel

## PIN CONFIGURATION

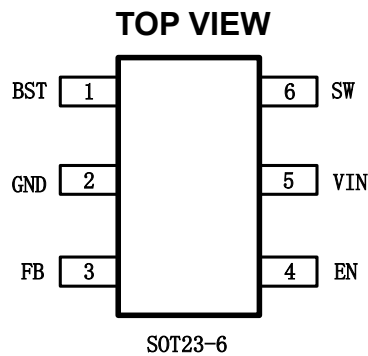

### ABSOLUTE MAXIMUM RATING<sup>1)</sup>

VIN, EN, SW Pin	-0.3V to 44V
BST Pin	SW-0.3V to SW+5V
All other Pins	-0.3V to 6V
Junction Temperature <sup>2) 3)</sup>	150°C
Lead Temperature	260 °C
Storage Temperature	-65 °C to +150 °C

### Recommended Operating Conditions

Input Voltage VIN	4.7V to 40V
Output Voltage Vout	0.8V to 37V
Operating Junction Temperature	-40°C to 125°C

**Thermal resistance<sup>4)</sup>**       $\theta_{JA}$        $\theta_{JC}$

SOT23-6 ..... 220... 130. °C /W

### Note :

- 1) Exceeding these ratings may damage the device.
- 2) The BL9341 guarantees robust performance from -40°C to 150°C junction temperature. The junction temperature range specification is assured by design, characterization and correlation with statistical process controls.
- 3) The BL9341 includes thermal protection that is intended to protect the device in overload conditions. Thermal protection is active when junction temperature exceeds the maximum operating junction temperature. Continuous operation over the specified absolute maximum operating junction temperature may damage the device.
- 4) Measured on JESD51-7, 4-layer PCB.


## ELECTRICAL CHARACTERISTICS

<i>V<sub>IN</sub> = 24V, T<sub>A</sub> = 25°C, unless otherwise stated.</i>						
Item	Symbol	Condition	Min.	Typ.	Max.	Units
V <sub>IN</sub> Undervoltage Lockout Threshold	V <sub>IN_MIN</sub>	V <sub>IN</sub> falling		4.2		V
V <sub>IN</sub> Undervoltage Lockout Hysteresis	V <sub>IN_MIN_HYST</sub>	V <sub>IN</sub> rising		160		mV
Shutdown Supply Current	I <sub>SD</sub>	V <sub>EN</sub> =0V		0.07	1	μA
Supply Current	I <sub>Q</sub>	V <sub>EN</sub> =5V, V <sub>FB</sub> =1V		50		μA
Feedback Voltage	V <sub>FB</sub>	4.7V<V <sub>IN</sub> <40V	776	800	824	mV
Top Switch Resistance	R <sub>DS(ON)T</sub>			500		mΩ
Bottom Switch Resistance	R <sub>DS(ON)B</sub>			220		mΩ
Top Switch Leakage Current	I <sub>LEAK_TOP</sub>	V <sub>IN</sub> =40V, V <sub>EN</sub> =0V, V <sub>SW</sub> =0V			1	uA
Bottom Switch Leakage Current	I <sub>LEAK_BOT</sub>	V <sub>IN</sub> = V <sub>SW</sub> = 40V, V <sub>EN</sub> =0V			1	uA
Top Switch Current Limit	I <sub>LIM_TOP</sub>	Minimum Duty Cycle		1		A
Switch Frequency	f <sub>SW</sub>			2		MHz
Minimum On Time	T <sub>ON_MIN</sub>			80		ns
Minimum Off Time	T <sub>OFF_MIN</sub>	V <sub>FB</sub> =0V		100		ns
EN shut down threshold voltage	V <sub>EN_TH</sub>	V <sub>EN</sub> falling, FB=0V		1.2		V
EN shut down hysteresis	V <sub>EN_HYST</sub>	V <sub>EN</sub> rising, FB=0V		40		mV
Thermal Shutdown	T <sub>TSD</sub>			135		°C
Thermal Shutdown hysteresis	T <sub>TSD_HYST</sub>			15		°C

## PIN DESCRIPTION

SOT23-6 Pin	Name	Description
1	BST	Bootstrap pin for top switch. A 0.1uF or larger capacitor should be connected between this pin and the SW pin to supply current to the top switch and top switch driver.
2	GND	Ground.
3	FB	Output feedback pin. FB senses the output voltage and is regulated by the control loop to 800mV. Connect a resistive divider at FB.
4	EN	Drive EN pin high to turn on the regulator and low to turn off the regulator.
5	VIN	Input voltage pin. VIN supplies power to the IC. Connect a 4.7V to 40V supply to VIN and bypass VIN to GND with a suitably large capacitor to eliminate noise on the input to the IC.
6	SW	SW is the switching node that supplies power to the output. Connect the output LC filter from SW to the output load.

## BLOCK DIAGRAM

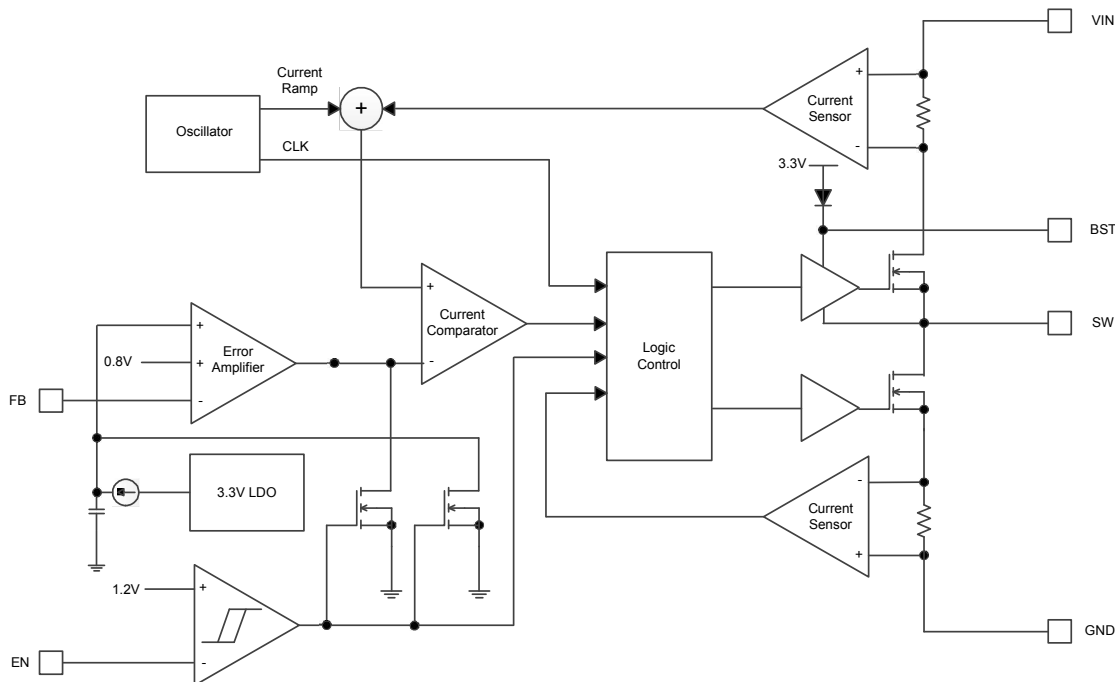


# TYPICAL PERFORMANCE CHARACTERISTICS

$V_{in} = 12V$ ,  $V_{out} = 5V$ ,  $L = 10\mu H$ ,  $C_{out} = 10\mu F$ ,  $T_A = +25^\circ C$ , unless otherwise noted


### Steady State Test

$V_{in}=12V$ ,  $V_{out}=5V$   
 $I_{out}=600mA$

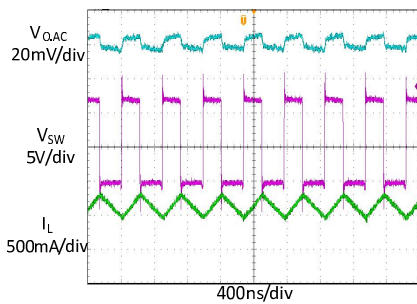


### Startup through Enable

$V_{in}=12V$ ,  $V_{out}=5V$   
 $I_{out}=600mA$ (Resistive load)

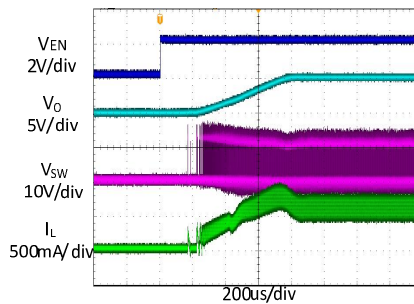


### Shutdown through Enable

$V_{in}=12V$ ,  $V_{out}=5V$   
 $I_{out}=600mA$ (Resistive load)

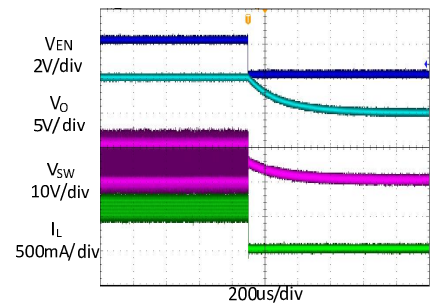


### Heavy Load Operation

600mA LOAD

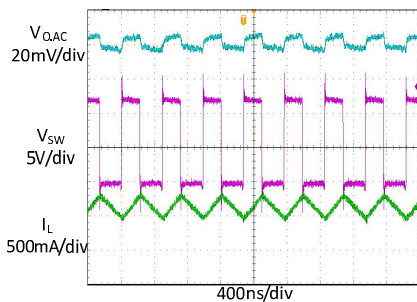


### Medium Load Operation

300mA LOAD

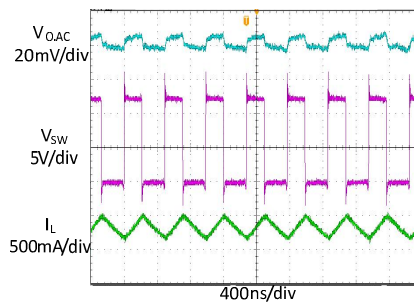


### Light Load Operation

0 A LOAD

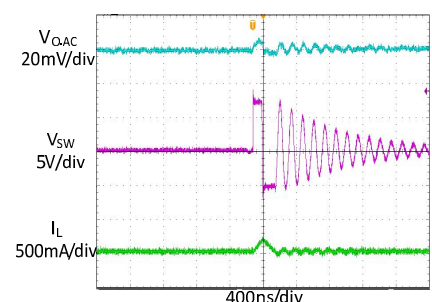


### Short Circuit Protection

$V_{in}=12V$ ,  $V_{out}=5V$   
 $I_{out}=600mA$ - Short

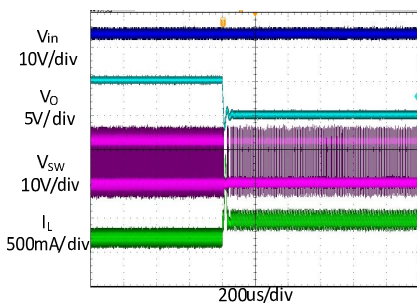


### Short Circuit Recovery

$V_{in}=12V$ ,  $V_{out}=5V$   
 $I_{out}$ = Short-600mA

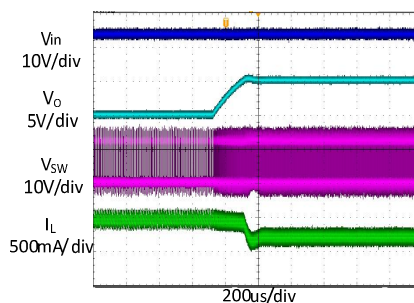

### Load Transient

300mA LOAD  $\rightarrow$  600mA LOAD  
 $\rightarrow$  300mA LOAD

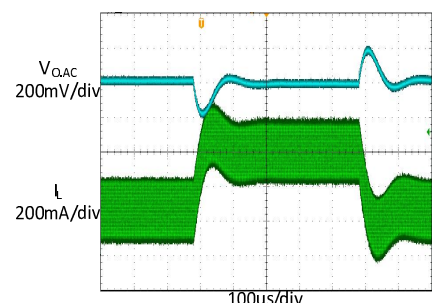

## FUNCTIONAL DESCRIPTION

The BL9341 is a synchronous, current-mode, step-down regulator. It regulates input voltages from 4.7V to 40V down to an output voltage as low as 0.8V, and is capable of supplying up to 600mA of load current.

### Current-Mode Control

The BL9341 utilizes current-mode control to regulate the output voltage. The output voltage is measured at the FB pin through a resistive voltage divider and the error is amplified by the internal transconductance error amplifier.

Output of the internal error amplifier is compared with the switch current measured internally to control the output current.

### PFM Mode

The BL9341 operates in PFM mode at light load. In PFM mode, switch frequency decreases when load current drops to boost power efficiency at light load by reducing switch-loss, while switch frequency increases when load current rises, minimizing output voltage ripples.

### Shut-Down Mode

The BL9341 shuts down when voltage at EN pin is below 1.2V. The entire regulator is off and the supply current consumed by the BL9341 drops below 0.1 $\mu$ A when voltage at EN pin is below 0.3V.

### Power Switch

N-Channel MOSFET switches are integrated on the BL9341 to down convert the input voltage to the regulated output voltage. Since the top MOSFET needs a gate voltage great than the input voltage, a boost capacitor connected between BST and SW pins is required to drive the gate of the top switch. The boost capacitor is charged by the internal 3.3V rail when SW is

low.

### Vin Under-Voltage Protection

A resistive divider can be connected between Vin and ground, with the central tap connected to EN, so that when Vin drops to the pre-set value, EN drops below 1.2V to trigger input under voltage lockout protection.

### Output Current Run-Away Protection

At start-up, due to the high voltage at input and low voltage at output, current inertia of the output inductance can be easily built up, resulting in a large start-up output current. A valley current limit is designed in the BL9341 so that only when output current drops below the valley current limit can the top power switch be turned on. By such control mechanism, the output current at start-up is well controlled.

### Output Short Protection

When output is shorted to ground, output current rapidly reaches its peak current limit and the top power switch is turned off. Right after the top power switch is turned off, the bottom power switch is turned on and stay on until the output current falls below the valley current limit. When output current is below the valley current limit, the top power switch will be turned on again and if the output short is still present, the top power switch is turned off when the peak current limit is reached and the bottom power switch is turned on. This cycle goes on until the output short is removed and the regulator comes into normal operation again.

### Thermal Protection

When the temperature of the BL9341 rises above 135°C, it is forced into thermal shut-down. Only when core temperature drops below 120°C

can the regulator becomes active again.

### PCB Layout Note

1. Place the input decoupling capacitor as close to BL9341 (VIN pin and PGND) as possible to eliminate noise at the input pin.
2. Put the feedback trace as far away from the inductor and noisy power traces as possible.
3. The ground plane on the PCB should be as large as possible for better heat dissipation.


## REFERENCE DESIGN

### Reference 1:

$V_{IN}$  : 5.1V ~ 40V

$V_{OUT}$ : 3.3V

$I_{OUT}$  : 0~600mA

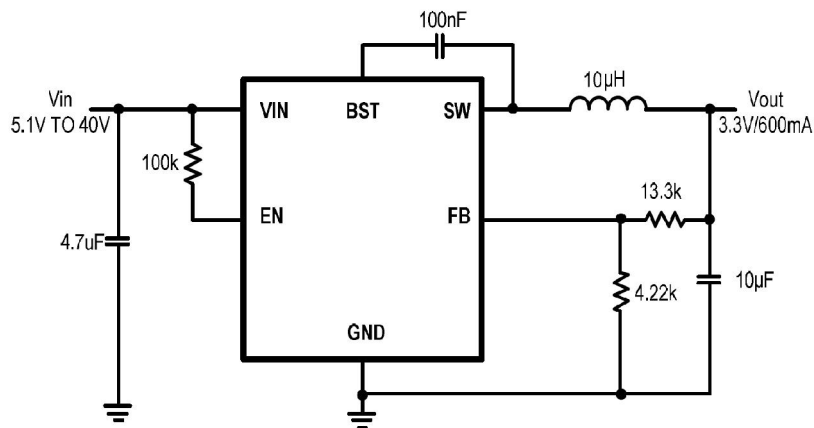


### Reference 2:

$V_{IN}$  : 7V ~ 40V

$V_{OUT}$ : 5V

$I_{OUT}$  : 0~600mA

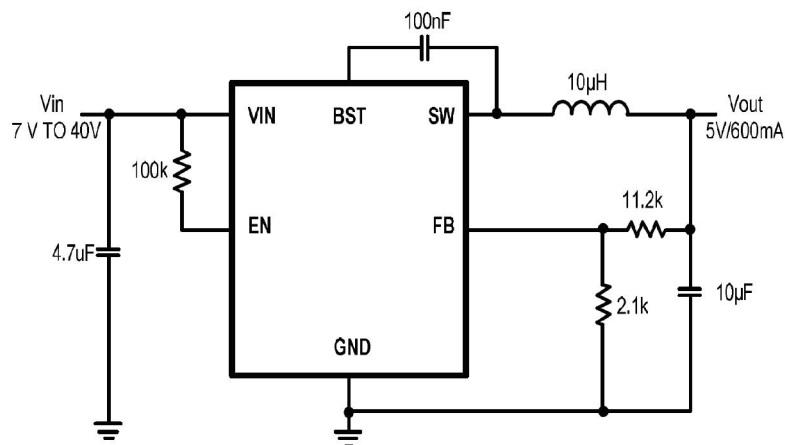

# PACKAGE OUTLINE

