

LMH6639 190MHz Rail-to-Rail Output Amplifier with Disable

Check for Samples: [LMH6639](#)

FEATURES

- ($V_S = 5V$, Typical Values Unless Specified)
- Supply Current (No Load) 3.6mA
- Supply Current (Off Mode) 400 μ A
- Output Resistance (Closed Loop 1MHz) 0.186 Ω
- -3dB BW ($A_V = 1$) 190MHz
- Settling Time 33nsec
- Input Common Mode Voltage -0.2V to 4V
- Output Voltage Swing 40mV from Rails
- Linear Output Current 110mA
- Total Harmonic Distortion -60dBc
- Fully Characterized for 3V, 5V and $\pm 5V$
- No Output Phase Reversal with CMVR Exceeded
- Excellent Overdrive Recovery
- Off Isolation 1MHz -70dB
- Differential Gain 0.12%
- Differential Phase 0.045°

APPLICATIONS

- Active Filters
- CD/DVD ROM
- ADC Buffer Amplifier
- Portable Video
- Current Sense Buffer

DESCRIPTION

The LMH6639 is a voltage feedback operational amplifier with a rail-to-rail output drive capability of 110mA. Employing TI's patented VIP10 process, the LMH6639 delivers a bandwidth of 190MHz at a current consumption of only 3.6mA. An input common mode voltage range extending to 0.2V below the V^- and to within 1V of V^+ , makes the LMH6639 a true single supply op-amp. The output voltage range extends to within 30mV of either supply rail providing the user with a dynamic range that is especially desirable in low voltage applications.

The LMH6639 offers a slew rate of 172V/ μ s resulting in a full power bandwidth of approximately 28MHz. The LMH6639 also offers protection for the input transistors by using two anti-parallel diodes and a series resistor connected across the inputs. The T_{ON} value of 83nsec combined with a settling time of 33nsec makes this device ideally suited for multiplexing applications (see application note for details). Careful attention has been paid to ensure device stability under all operating voltages and modes. The result is a very well behaved frequency response characteristic for any gain setting including +1, and excellent specifications for driving video cables including harmonic distortion of -60dBc, differential gain of 0.12% and differential phase of 0.045°

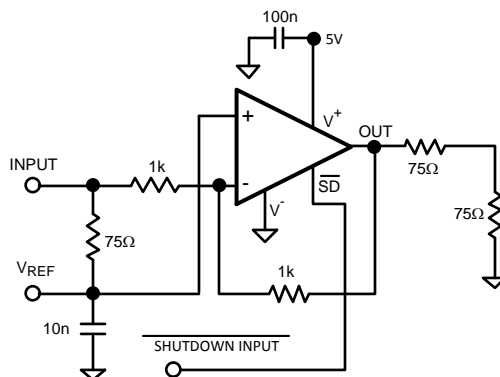


Figure 1. Typical Single Supply Schematic



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Absolute Maximum Ratings⁽¹⁾⁽²⁾

| | | |
|---|---------------------------------|--|
| ESD Tolerance | | 2kV ⁽³⁾ |
| | | 200V ⁽⁴⁾ |
| V _{IN} Differential | | ±2.5V |
| Input Current | | ±10mA |
| Supply Voltage (V ⁺ – V ⁻) | | 13.5V |
| Voltage at Input/Output pins | | V ⁺ +0.8V, V ⁻ -0.8V |
| Storage Temperature Range | | -65°C to +150°C |
| Junction Temperature ⁽⁵⁾⁽⁶⁾ | | +150°C |
| Soldering Information | Infrared or Convection (20 sec) | 235°C |
| | Wave Soldering (10 sec) | 260°C |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the Texas Instruments Sales Office/ Distributors for availability and specifications.
- (3) Human body model, 1.5kΩ in series with 100pF.
- (4) Machine Model, 0Ω in series with 200pF.
- (5) The maximum power dissipation is a function of T_{J(MAX)}, θ_{JA}, and T_A. The maximum allowable power dissipation at any ambient temperature is P_D = (T_{J(MAX)} - T_A) / θ_{JA}. All numbers apply for packages soldered directly onto a PC board.
- (6) Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.

Operating Ratings⁽¹⁾

| | | |
|--|----------|----------------|
| Supply Voltage (V ⁺ to V ⁻) | | 3V to 12V |
| Operating Temperature Range ⁽²⁾ | | -40°C to +85°C |
| Package Thermal Resistance (θ _{JA}) ⁽²⁾ | SOT-23-6 | 265°C/W |
| | SOIC-8 | 190°C/W |

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) The maximum power dissipation is a function of T_{J(MAX)}, θ_{JA}, and T_A. The maximum allowable power dissipation at any ambient temperature is P_D = (T_{J(MAX)} - T_A) / θ_{JA}. All numbers apply for packages soldered directly onto a PC board.

3V Electrical Characteristics

Unless otherwise specified, all limits ensured for at T_J = 25°C, V⁺ = 3V, V⁻ = 0V, V_O = V_{CM} = V⁺/2, and R_L = 2kΩ to V⁺/2.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|---------------------|------------------------------|---|--------------------|--------------------|--------------------|--------|
| BW | -3dB BW | A _V = +1 | 120 | 170 | | MHz |
| | | A _V = -1 | | 63 | | |
| BW _{0.1dB} | 0.1dB Gain Flatness | R _F = 2.65kΩ, R _L = 1kΩ, | | 16.4 | | MHz |
| FPBW | Full Power Bandwidth | A _V = +1, V _{OUT} = 2V _{PP} , -1dB V ⁺ = 1.8V, V ⁻ = 1.2V | | 21 | | MHz |
| GBW | Gain Bandwidth product | A _V = +1 | | 83 | | MHz |
| e _n | Input-Referred Voltage Noise | R _F = 33kΩ | f = 10kHz | 19 | | nV/√Hz |
| | | | f = 1MHz | 16 | | |
| i _n | Input-Referred Current Noise | R _F = 1MΩ | f = 10kHz | 1.30 | | pA/√Hz |
| | | | f = 1MHz | 0.36 | | |
| THD | Total Harmonic Distortion | f = 5MHz, V _O = 2V _{PP} , A _V = +2, R _L = 1kΩ to V ⁺ /2 | | -50 | | dBc |

- (1) All limits are ensured by testing or statistical analysis.
- (2) Typical values represent the most likely parametric norm.

3V Electrical Characteristics (continued)

Unless otherwise specified, all limits ensured for at $T_J = 25^\circ\text{C}$, $V^+ = 3\text{V}$, $V^- = 0\text{V}$, $V_O = V_{\text{CM}} = V^+/2$, and $R_L = 2\text{k}\Omega$ to $V^+/2$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|---------------------|-------------------------------------|---|--------------------|--------------------|--------------------|------------------------------|
| T_S | Settling Time | $V_O = 2V_{\text{PP}}, \pm 0.1\%$ | | 37 | | ns |
| SR | Slew Rate | $A_V = -1$ ⁽³⁾ | 120 | 167 | | V/ μs |
| V_{OS} | Input Offset Voltage | | | 1.01 | 5 7 | mV |
| TC V_{OS} | Input Offset Average Drift | See ⁽⁴⁾ | | 8 | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | See ⁽⁵⁾ | | -1.02 | -2.6 -3.5 | μA |
| I_{OS} | Input Offset Current | | | 20 | 800 1000 | nA |
| R_{IN} | Common Mode Input Resistance | $A_V = +1, f = 1\text{kHz}, R_S = 1\text{M}\Omega$ | | 6.1 | | M Ω |
| C_{IN} | Common Mode Input Capacitance | $A_V = +1, R_S = 100\text{k}\Omega$ | | 1.35 | | pF |
| CMVR | Input Common-Mode Voltage Range | CMRR $\geq 50\text{dB}$ | | -0.3 | -0.2 -0.1 | V |
| | | | 1.8 1.6 | 2 | | |
| CMRR | Common Mode Rejection Ratio | See ⁽⁶⁾ | 72 | 93 | | dB |
| A_{VOL} | Large Signal Voltage Gain | $V_O = 2V_{\text{PP}}, R_L = 2\text{k}\Omega$ to $V^+/2$ | 80 76 | 100 | | dB |
| | | $V_O = 2V_{\text{PP}}, R_L = 150\Omega$ to $V^+/2$ | 74 70 | 78 | | |
| V_O | Output Swing High | $R_L = 2\text{k}\Omega$ to $V^+/2, V_{\text{ID}} = 200\text{mV}$ | 2.90 | 2.98 | | V |
| | | $R_L = 150\Omega$ to $V^+/2, V_{\text{ID}} = 200\text{mV}$ | 2.75 | 2.93 | | |
| | | $R_L = 50\Omega$ to $V^+/2, V_{\text{ID}} = 200\text{mV}$ | 2.6 | 2.85 | | |
| | Output Swing Low | $R_L = 2\text{k}\Omega$ to $V^+/2, V_{\text{ID}} = -200\text{mV}$ | | 25 | 75 | mV |
| | | $R_L = 150\Omega$ to $V^+/2, V_{\text{ID}} = -200\text{mV}$ | | 75 | 200 | |
| | | $R_L = 50\Omega$ to $V^+/2, V_{\text{ID}} = -200\text{mV}$ | | 130 | 300 | |
| I_{SC} | Output Short Circuit Current | Sourcing to $V^+/2$ ⁽⁷⁾ | 50 35 | 120 | | mA |
| | | Sinking to $V^+/2$ ⁽⁷⁾ | 67 40 | 140 | | |
| I_{OUT} | Output Current | $V_O = 0.5\text{V}$ from either supply | | 99 | | mA |
| PSRR | Power Supply Rejection Ratio | See ⁽⁶⁾ | 72 | 96 | | dB |
| I_S | Supply Current (Enabled) | No Load | | 3.5 | 5.6 7.5 | mA |
| | Supply Current (Disabled) | | | 0.3 | 0.5 0.7 | |
| TH_SD | Threshold Voltage for Shutdown Mode | | | $V^+ - 1.59$ | | V |
| $I_{\text{SD PIN}}$ | Shutdown Pin Input Current | SD Pin Connect to 0V ⁽⁸⁾ | | -13 | | μA |
| T_{ON} | On Time After Shutdown | | | 83 | | nsec |
| T_{OFF} | Off Time to Shutdown | | | 160 | | nsec |
| R_{OUT} | Output Resistance Closed Loop | $R_F = 10\text{k}\Omega, f = 1\text{kHz}, A_V = -1$ | | 27 | | m Ω |
| | | $R_F = 10\text{k}\Omega, f = 1\text{MHz}, A_V = -1$ | | 266 | | |

(3) Slew rate is the average of the rising and falling slew rates.

(4) Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.

(5) Positive current corresponds to current flowing into the device.

(6) $f \leq 1\text{kHz}$ (see typical performance Characteristics)

(7) Short circuit test is a momentary test.

(8) Positive current corresponds to current flowing into the device.

5V Electrical Characteristics

Unless otherwise specified, all limits ensured for at $T_J = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_O = V_{\text{CM}} = V^+/2$, and $R_L = 2\text{k}\Omega$ to $V^+/2$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|---------------------|---------------------------------|---|--------------------|--------------------|--------------------|------------------------------|
| BW | -3dB BW | $A_V = +1$ | 130 | 190 | | MHz |
| | | $A_V = -1$ | | 64 | | |
| $BW_{0.1\text{dB}}$ | 0.1dB Gain Flatness | $R_F = 2.51\text{k}\Omega$, $R_L = 1\text{k}\Omega$, | | 16.4 | | MHz |
| FPBW | Full Power Bandwidth | $A_V = +1$, $V_{\text{OUT}} = 2V_{\text{PP}}$, -1dB | | 28 | | MHz |
| GBW | Gain Bandwidth Product | $A_V = +1$ | | 86 | | MHz |
| e_n | Input-Referred Voltage Noise | $R_F = 33\text{k}\Omega$ | $f = 10\text{kHz}$ | 19 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| | | | $f = 1\text{MHz}$ | 16 | | |
| i_n | Input-Referred Current Noise | $R_F = 1\text{M}\Omega$ | $f = 10\text{kHz}$ | 1.35 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| | | | $f = 1\text{MHz}$ | 0.35 | | |
| THD | Total Harmonic Distortion | $f = 5\text{MHz}$, $V_O = 2V_{\text{PP}}$, $A_V = +2$ $R_L = 1\text{k}\Omega$ to $V^+/2$ | | -60 | | dBc |
| DG | Differential Gain | NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$ | | 0.12 | | % |
| DP | Differential Phase | NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$ | | 0.045 | | deg |
| T_S | Settling Time | $V_O = 2V_{\text{PP}}$, $\pm 0.1\%$ | | 33 | | ns |
| SR | Slew Rate | $A_V = -1$ ⁽³⁾ | 130 | 172 | | $\text{V}/\mu\text{s}$ |
| V_{OS} | Input Offset Voltage | | | 1.02 | 5 7 | mV |
| TC V_{OS} | Input Offset Average Drift | See ⁽⁴⁾ | | 8 | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | See ⁽⁵⁾ | | -1.2 | -2.6 -3.25 | μA |
| I_{OS} | Input Offset Current | | | 20 | 800 1000 | nA |
| R_{IN} | Common Mode Input Resistance | $A_V = +1$, $f = 1\text{kHz}$, $R_S = 1\text{M}\Omega$ | | 6.88 | | $\text{M}\Omega$ |
| C_{IN} | Common Mode Input Capacitance | $A_V = +1$, $R_S = 100\text{k}\Omega$ | | 1.32 | | pF |
| CMVR | Common-Mode Input Voltage Range | CMRR $\geq 50\text{dB}$ | | -0.3 | -0.2 -0.1 | V |
| | | | | 4 | 3.8 3.6 | |
| CMRR | Common Mode Rejection Ratio | See ⁽⁶⁾ | 72 | 95 | | dB |
| A_{VOL} | Large Signal Voltage Gain | $V_O = 4V_{\text{PP}}$ $R_L = 2\text{k}\Omega$ to $V^+/2$ | 86 82 | 100 | | dB |
| | | $V_O = 3.75V_{\text{PP}}$ $R_L = 150\Omega$ to $V^+/2$ | 74 70 | 77 | | |
| V_O | Output Swing High | $R_L = 2\text{k}\Omega$ to $V^+/2$, $V_{\text{ID}} = 200\text{mV}$ | 4.90 | 4.97 | | V |
| | | $R_L = 150\Omega$ to $V^+/2$, $V_{\text{ID}} = 200\text{mV}$ | 4.65 | 4.90 | | |
| | | $R_L = 50\Omega$ to $V^+/2$, $V_{\text{ID}} = 200\text{mV}$ | 4.40 | 4.77 | | |
| | Output Swing Low | $R_L = 2\text{k}\Omega$ to $V^+/2$, $V_{\text{ID}} = -200\text{mV}$ | | 25 | 100 | mV |
| | | $R_L = 150\Omega$ to $V^+/2$, $V_{\text{ID}} = -200\text{mV}$ | | 85 | 200 | |
| | | $R_L = 50\Omega$ to $V^+/2$, $V_{\text{ID}} = -200\text{mV}$ | | 190 | 400 | |

(1) All limits are ensured by testing or statistical analysis.

(2) Typical values represent the most likely parametric norm.

(3) Slew rate is the average of the rising and falling slew rates.

(4) Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.

(5) Positive current corresponds to current flowing into the device.

(6) $f \leq 1\text{kHz}$ (see typical performance Characteristics)

5V Electrical Characteristics (continued)

Unless otherwise specified, all limits ensured for at $T_J = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0\text{V}$, $V_O = V_{\text{CM}} = V^+/2$, and $R_L = 2\text{k}\Omega$ to $V^+/2$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|---------------------|-------------------------------------|---|--------------------|--------------------|--------------------|---------------|
| I_{SC} | Output Short Circuit Current | Sourcing to $V^+/2$ ⁽⁷⁾ | 100 79 | 160 | | mA |
| | | Sinking from $V^+/2$ ⁽⁷⁾ | 120 85 | 190 | | |
| I_{OUT} | Output Current | $V_O = 0.5\text{V}$ from either supply | | 110 | | mA |
| PSRR | Power Supply Rejection Ratio | See ⁽⁶⁾ | 72 | 96 | | dB |
| I_S | Supply Current (Enabled) | No Load | | 3.6 | 5.8 8.0 | mA |
| | Supply Current (Disabled) | | | 0.40 | 0.8 1.0 | |
| TH_SD | Threshold Voltage for Shutdown Mode | | | $V^+ - 1.65$ | | V |
| $I_{\text{SD PIN}}$ | Shutdown Pin Input Current | SD Pin Connected to 0V ⁽⁵⁾ | | -30 | | μA |
| T_{ON} | On Time after Shutdown | | | 83 | | nsec |
| T_{OFF} | Off Time to Shutdown | | | 160 | | nsec |
| R_{OUT} | Output Resistance Closed Loop | $R_F = 10\text{k}\Omega$, $f = 1\text{kHz}$, $A_V = -1$ | | 29 | | m Ω |
| | | $R_F = 10\text{k}\Omega$, $f = 1\text{MHz}$, $A_V = -1$ | | 253 | | |

(7) Short circuit test is a momentary test.

$\pm 5\text{V}$ Electrical Characteristics

Unless otherwise specified, all limits ensured for at $T_J = 25^\circ\text{C}$, $V_{\text{SUPPLY}} = \pm 5\text{V}$, $V_O = V_{\text{CM}} = \text{GND}$, and $R_L = 2\text{k}\Omega$ to $V^+/2$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|---------------------|------------------------------|--|--------------------|--------------------|----------------------|------------------------------|
| BW | -3dB BW | $A_V = +1$ | 150 | 228 | | MHz |
| | | $A_V = -1$ | | 65 | | |
| $BW_{0.1\text{dB}}$ | 0.1dB Gain Flatness | $R_F = 2.26\text{k}\Omega$, $R_L = 1\text{k}\Omega$ | | 18 | | MHz |
| FPBW | Full Power Bandwidth | $A_V = +1$, $V_{\text{OUT}} = 2V_{\text{PP}}$, -1dB | | 29 | | MHz |
| GBW | Gain Bandwidth Product | $A_V = +1$ | | 90 | | MHz |
| e_n | Input-Referred Voltage Noise | $R_F = 33\text{k}\Omega$ | $f = 10\text{kHz}$ | 19 | | $\text{nV}/\sqrt{\text{Hz}}$ |
| | | | $f = 1\text{MHz}$ | 16 | | |
| i_n | Input-Referred Current Noise | $R_F = 1\text{M}\Omega$ | $f = 10\text{kHz}$ | 1.13 | | $\text{pA}/\sqrt{\text{Hz}}$ |
| | | | $f = 1\text{MHz}$ | 0.34 | | |
| THD | Total Harmonic Distortion | $f = 5\text{MHz}$, $V_O = 2V_{\text{PP}}$, $A_V = +2$, $R_L = 1\text{k}\Omega$ | | -71.2 | | dBc |
| DG | Differential Gain | NTSC, $A_V = +2$ $R_L = 150\Omega$ | | 0.11 | | % |
| DP | Differential Phase | NTSC, $A_V = +2$ $R_L = 150\Omega$ | | 0.053 | | deg |
| T_S | Settling Time | $V_O = 2V_{\text{PP}}$, $\pm 0.1\%$ | | 33 | | ns |
| SR | Slew Rate | $A_V = -1$ ⁽³⁾ | 140 | 200 | | $\text{V}/\mu\text{s}$ |
| V_{OS} | Input Offset Voltage | | | 1.03 | 5 7 | mV |
| TC V_{OS} | Input Offset Voltage Drift | See ⁽⁴⁾ | | 8 | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input Bias Current | See ⁽⁵⁾ | | -1.40 | -2.6 -3.25 | μA |

(1) All limits are ensured by testing or statistical analysis.

(2) Typical values represent the most likely parametric norm.

(3) Slew rate is the average of the rising and falling slew rates.

(4) Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes into the total temperature change.

(5) Positive current corresponds to current flowing into the device.

±5V Electrical Characteristics (continued)

Unless otherwise specified, all limits ensured for at $T_J = 25^\circ\text{C}$, $V_{\text{SUPPLY}} = \pm 5\text{V}$, $V_O = V_{\text{CM}} = \text{GND}$, and $R_L = 2\text{k}\Omega$ to $V^+/2$.

Boldface limits apply at the temperature extremes.

| Symbol | Parameter | Conditions | Min ⁽¹⁾ | Typ ⁽²⁾ | Max ⁽¹⁾ | Units |
|---------------------|-------------------------------------|---|--------------------|--------------------|---------------------|------------------|
| I_{OS} | Input Offset Current | | | 20 | 800 1000 | nA |
| R_{IN} | Common Mode Input Resistance | $A_V = +1$, $f = 1\text{kHz}$, $R_S = 1\text{M}\Omega$ | | 7.5 | | $\text{M}\Omega$ |
| C_{IN} | Common Mode Input Capacitance | $A_V = +1$, $R_S = 100\text{k}\Omega$ | | 1.28 | | pF |
| CMVR | Common Mode Input Voltage Range | CMRR $\geq 50\text{dB}$ | | -5.3 | -5.2 -5.1 | V |
| | | | 3.8 3.6 | 4.0 | | |
| CMRR | Common Mode Rejection Ratio | See ⁽⁶⁾ | 72 | 95 | | dB |
| A_{VOL} | Large Signal Voltage Gain | $V_O = 9V_{\text{PP}}$, $R_L = 2\text{k}\Omega$ | 88 84 | 100 | | dB |
| | | $V_O = 8V_{\text{PP}}$, $R_L = 150\Omega$ | 74 70 | 77 | | |
| V_O | Output Swing High | $R_L = 2\text{k}\Omega$, $V_{\text{ID}} = 200\text{mV}$ | 4.85 | 4.96 | | V |
| | | $R_L = 150\Omega$, $V_{\text{ID}} = 200\text{mV}$ | 4.55 | 4.80 | | |
| | | $R_L = 50\Omega$, $V_{\text{ID}} = 200\text{mV}$ | 3.60 | 4.55 | | |
| | Output Swing Low | $R_L = 2\text{k}\Omega$, $V_{\text{ID}} = -200\text{mV}$ | | -4.97 | -4.90 | V |
| | | $R_L = 150\Omega$, $V_{\text{ID}} = -200\text{mV}$ | | -4.85 | -4.55 | |
| | | $R_L = 50\Omega$, $V_{\text{ID}} = -200\text{mV}$ | | -4.65 | -4.30 | |
| I_{SC} | Output Short Circuit Current | Sourcing to Ground ⁽⁷⁾ | 100 80 | 168 | | mA |
| | | Sinking to Ground ⁽⁷⁾ | 110 85 | 190 | | |
| I_{OUT} | Output Current | $V_O = 0.5\text{V}$ from either supply | | 112 | | mA |
| PSRR | Power Supply Rejection Ratio | See ⁽⁸⁾ | 72 | 96 | | dB |
| I_S | Supply Current (Enabled) | No Load | | 4.18 | 6.5 8.5 | mA |
| | Supply Current (Disabled) | | | 0.758 | 1.0 1.3 | |
| TH_SD | Threshold Voltage for Shutdown Mode | | | $V^+ - 1.67$ | | V |
| $I_{\text{SD PIN}}$ | Shutdown Pin Input Current | SD Pin Connected to -5V ⁽⁹⁾ | | -84 | | μA |
| T_{ON} | On Time after Shutdown | | | 83 | | nsec |
| T_{OFF} | Off Time to Shutdown | | | 160 | | nsec |
| R_{OUT} | Output Resistance Closed Loop | $R_F = 10\text{k}\Omega$, $f = 1\text{kHz}$, $A_V = -1$ | | 32 | | $\text{m}\Omega$ |
| | | $R_F = 10\text{k}\Omega$, $f = 1\text{MHz}$, $A_V = -1$ | | 226 | | |


(6) $f \leq 1\text{kHz}$ (see typical performance Characteristics)

(7) Short circuit test is a momentary test.


(8) $f \leq 1\text{kHz}$ (see typical performance Characteristics)

(9) Positive current corresponds to current flowing into the device.

Connection Diagram

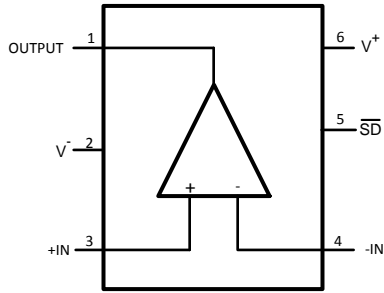

**Figure 2. SOT-23-6
Top View**

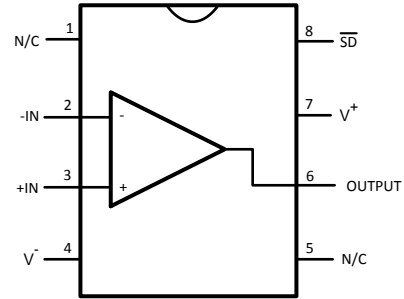

**Figure 3. SOIC-8
Top View**

Typical Performance Characteristics

At $T_J = 25^\circ\text{C}$, $V^+ = +2.5$, $V^- = -2.5\text{V}$, $R_F = 330\Omega$ for $A_V = +2$, $R_F = 1\text{k}\Omega$ for $A_V = -1$. Unless otherwise specified.

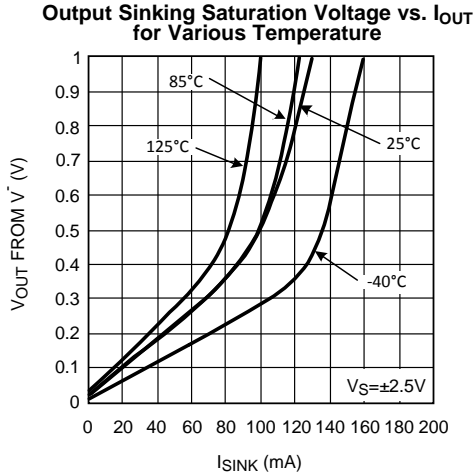


Figure 4.

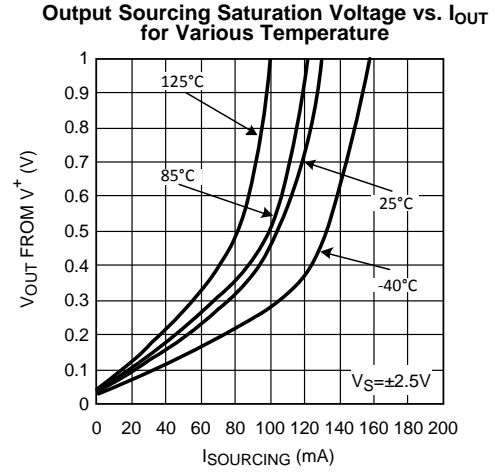


Figure 5.

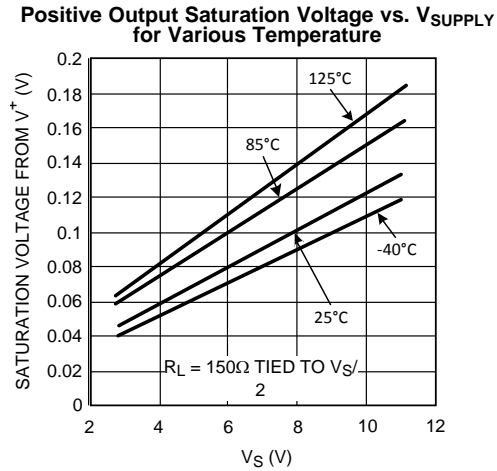


Figure 6.

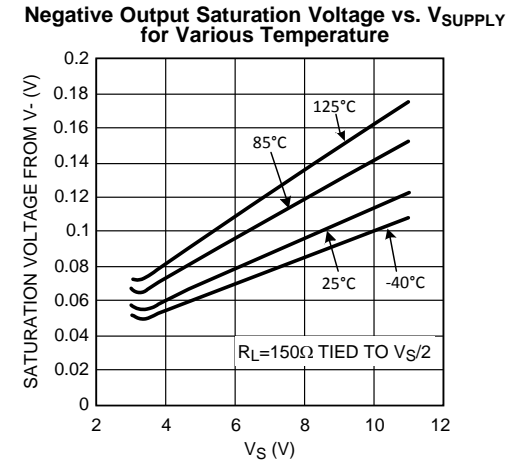


Figure 7.

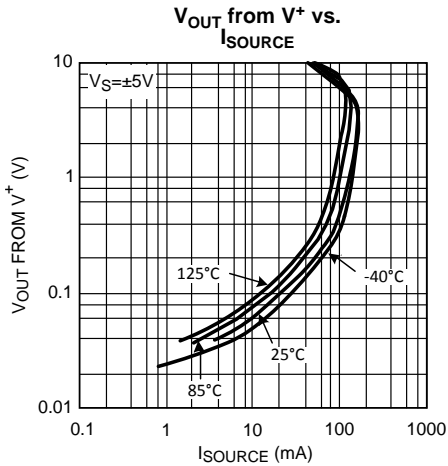


Figure 8.

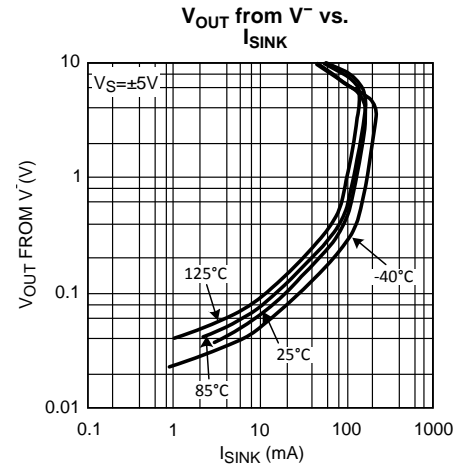


Figure 9.

Typical Performance Characteristics (continued)

At $T_J = 25^\circ\text{C}$, $V^+ = +2.5$, $V^- = -2.5$, $R_F = 330\Omega$ for $A_V = +2$, $R_F = 1\text{k}\Omega$ for $A_V = -1$. Unless otherwise specified.

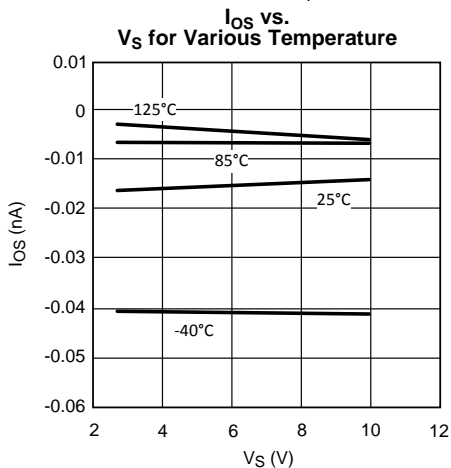


Figure 10.

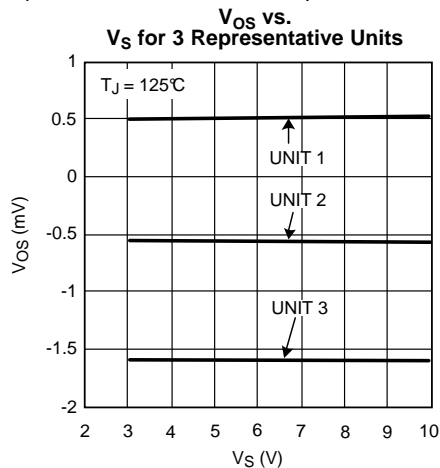


Figure 11.

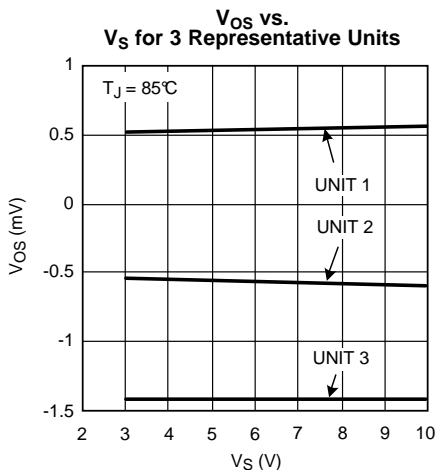


Figure 12.

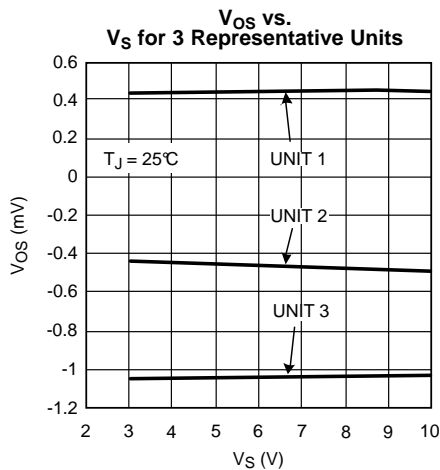


Figure 13.

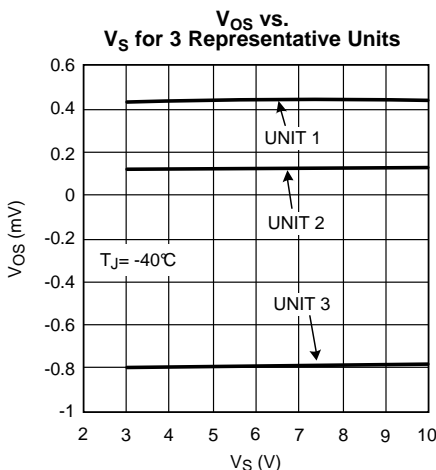


Figure 14.







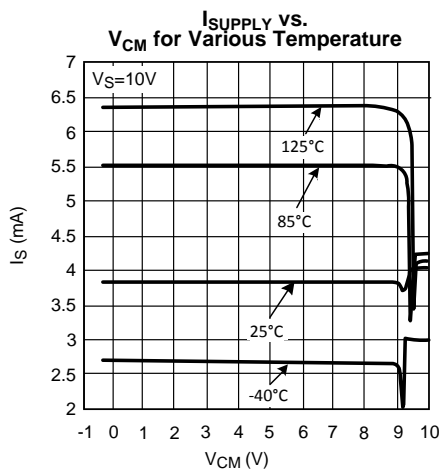


Figure 15.

Typical Performance Characteristics (continued)

At $T_J = 25^\circ\text{C}$, $V^+ = +2.5$, $V^- = -2.5$, $R_F = 330\Omega$ for $A_V = +2$, $R_F = 1\text{k}\Omega$ for $A_V = -1$. Unless otherwise specified.

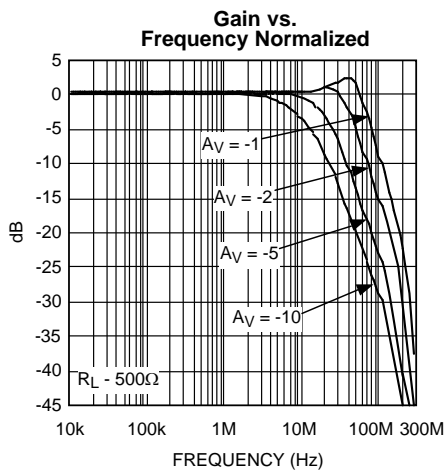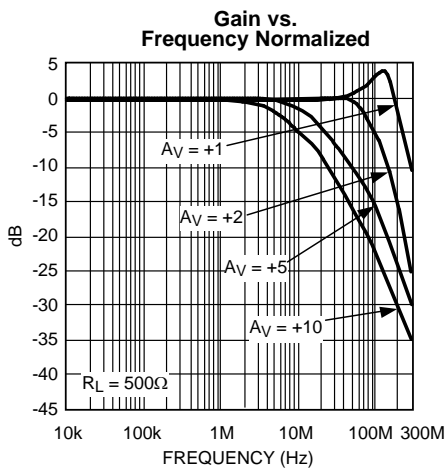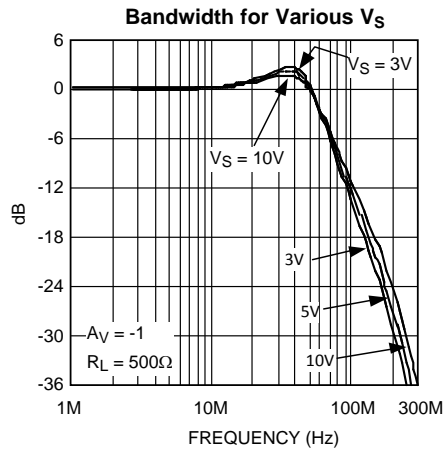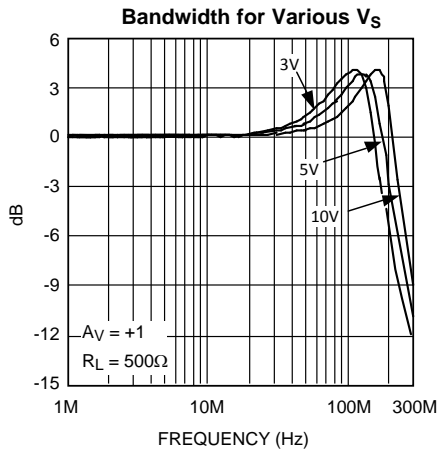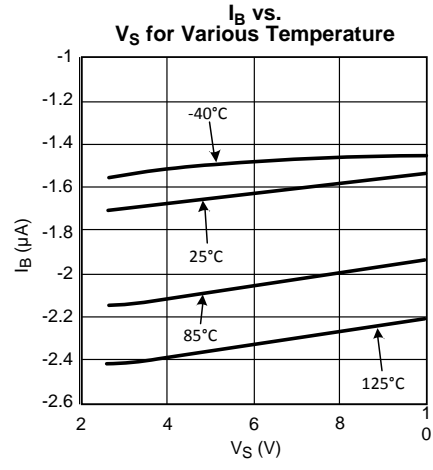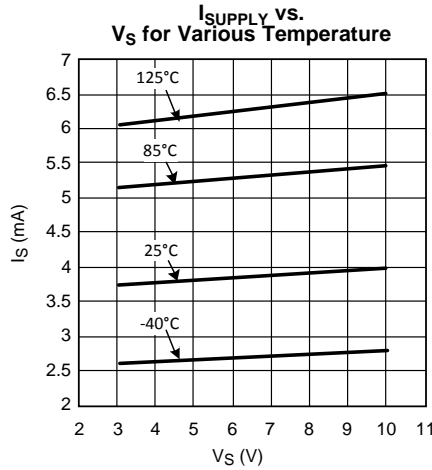

Typical Performance Characteristics (continued)

At $T_J = 25^\circ\text{C}$, $V^+ = +2.5$, $V^- = -2.5$, $R_F = 330\Omega$ for $A_V = +2$, $R_F = 1\text{k}\Omega$ for $A_V = -1$. Unless otherwise specified.

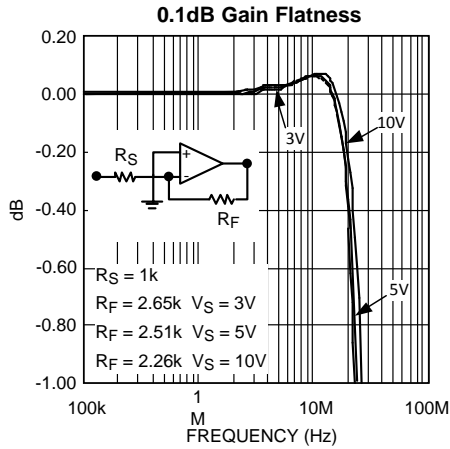


Figure 22.

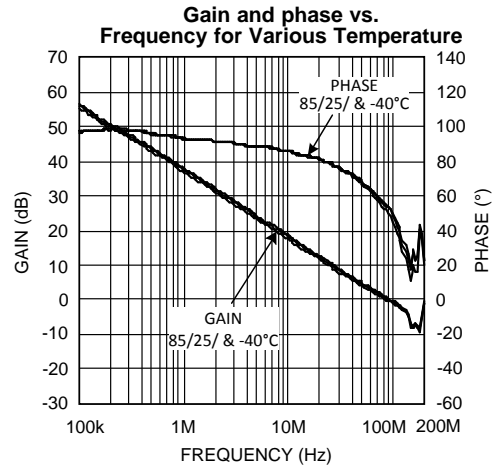


Figure 23.

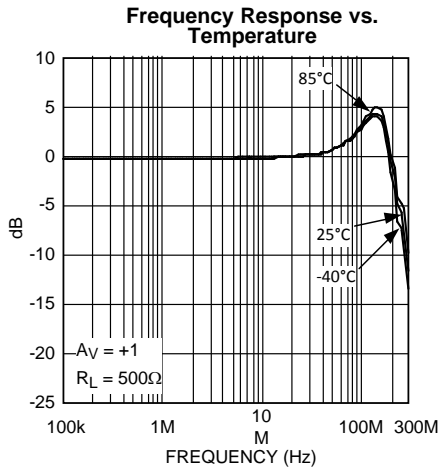


Figure 24.

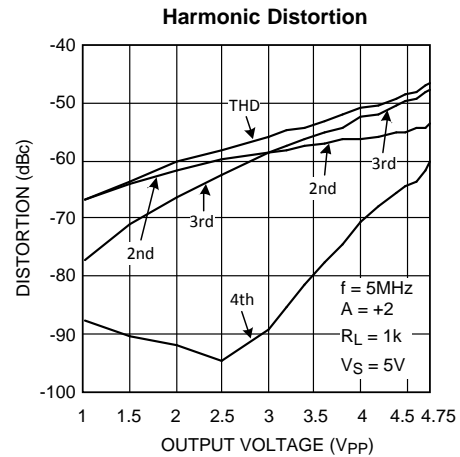


Figure 25.

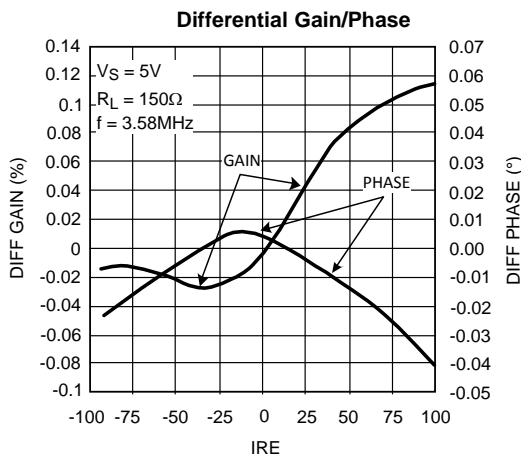


Figure 26.

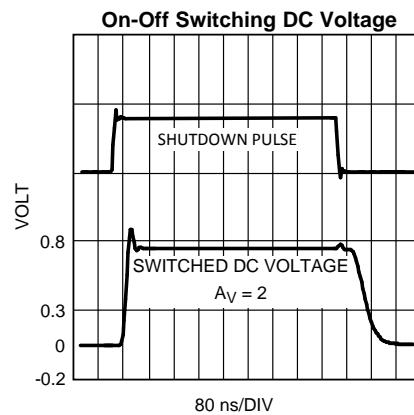


Figure 27.

Typical Performance Characteristics (continued)

At $T_J = 25^\circ\text{C}$, $V^+ = +2.5\text{V}$, $V^- = -2.5\text{V}$, $R_F = 330\Omega$ for $A_V = +2$, $R_F = 1\text{k}\Omega$ for $A_V = -1$. Unless otherwise specified.

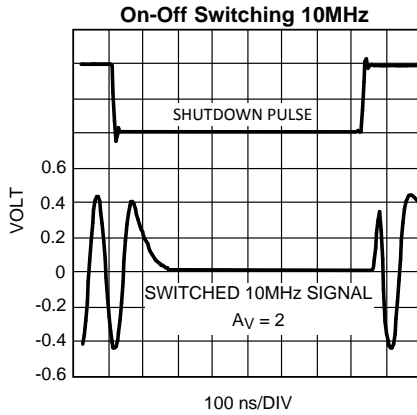


Figure 28.

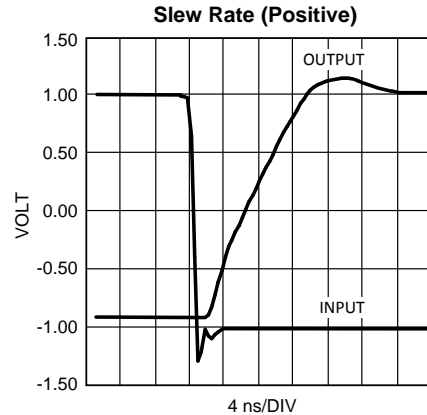


Figure 29.

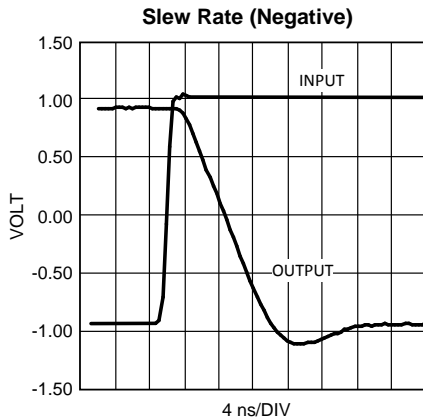


Figure 30.

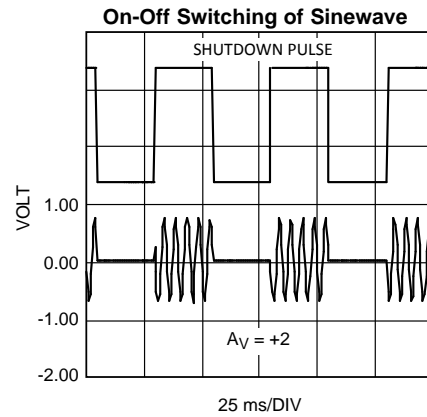


Figure 31.

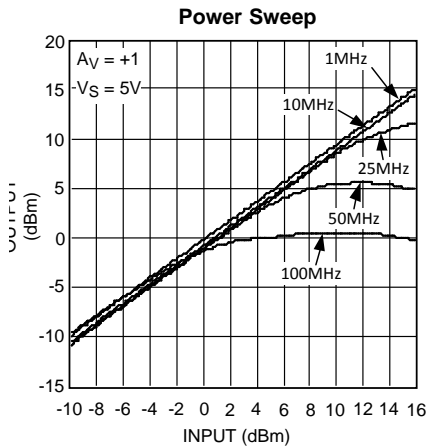


Figure 32.

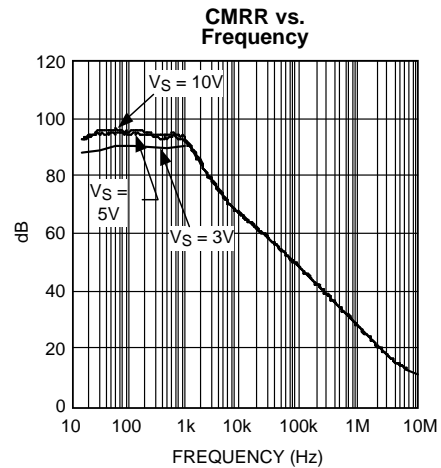


Figure 33.

Typical Performance Characteristics (continued)

At $T_J = 25^\circ\text{C}$, $V^+ = +2.5$, $V^- = -2.5$, $R_F = 330\Omega$ for $A_V = +2$, $R_F = 1\text{k}\Omega$ for $A_V = -1$. Unless otherwise specified.

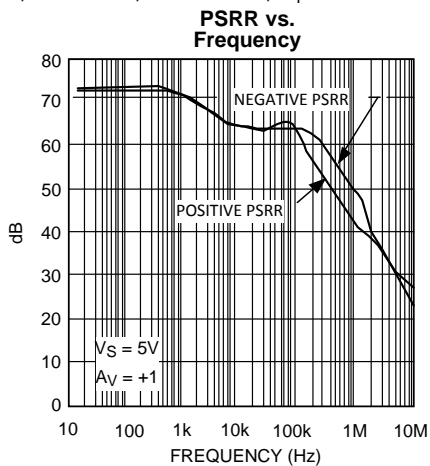


Figure 34.

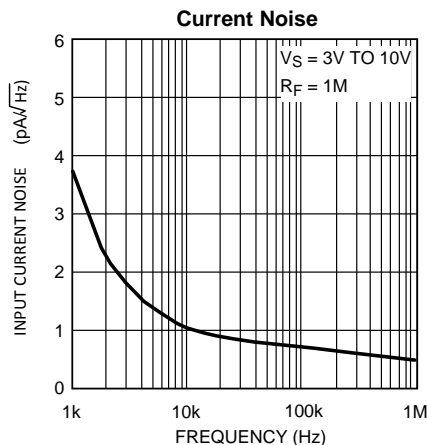


Figure 35.

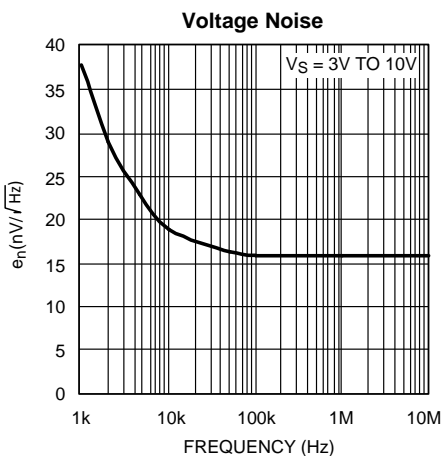


Figure 36.

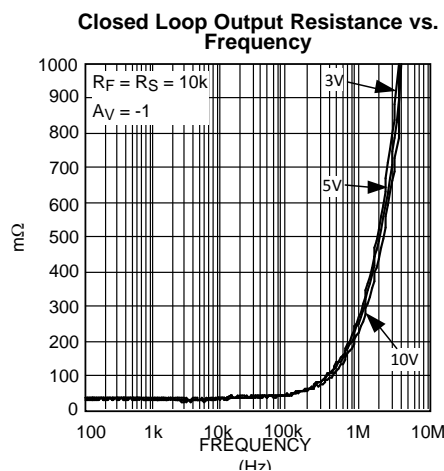


Figure 37.

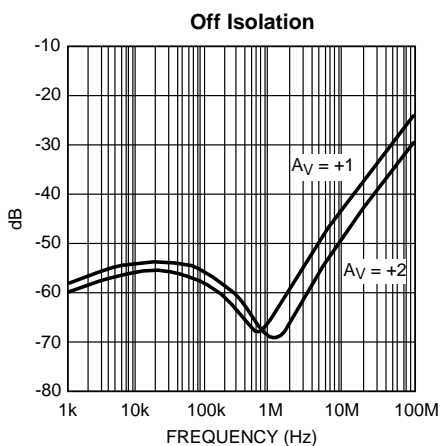


Figure 38.

Small Signal Pulse Response ($A_V = +1$, $R_L = 2\text{k}$)

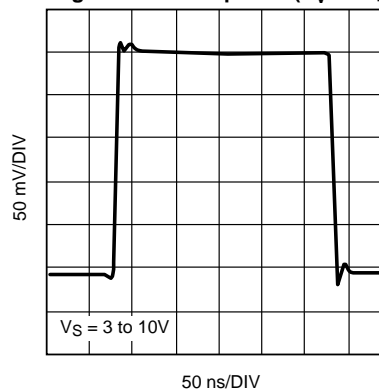


Figure 39.

Typical Performance Characteristics (continued)

At $T_J = 25^\circ\text{C}$, $V^+ = +2.5$, $V^- = -2.5\text{V}$, $R_F = 330\Omega$ for $A_V = +2$, $R_F = 1\text{k}\Omega$ for $A_V = -1$. Unless otherwise specified.

Small Signal Pulse Response ($A_V = -1$)

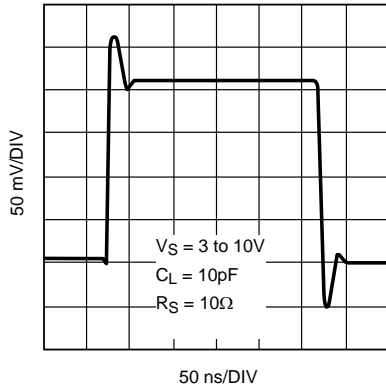


Figure 40.

Large Signal Pulse Response ($R_L = 2\text{k}$)

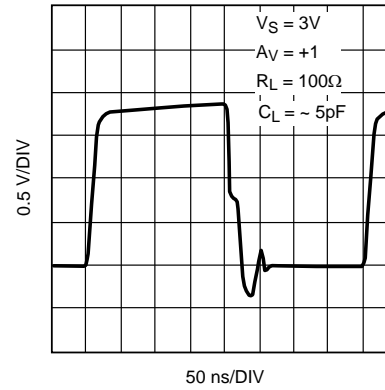


Figure 41.

Large Signal Pulse Response

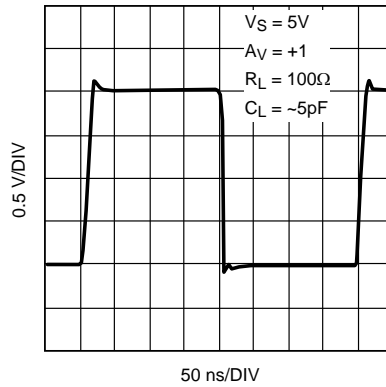


Figure 42.

Large Signal Pulse Response

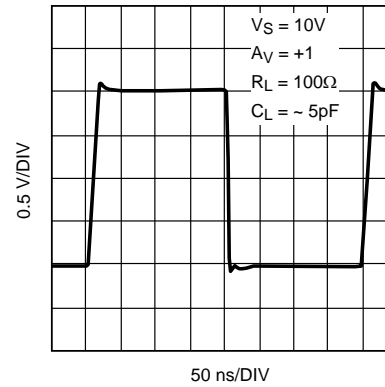


Figure 43.

APPLICATION NOTES

INPUT AND OUTPUT TOPOLOGY

All input / output pins are protected against excessive voltages by ESD diodes connected to V+ and V- rails (see Figure 44). These diodes start conducting when the input / output pin voltage approaches $1V_{be}$ beyond V+ or V- to protect against over voltage. These diodes are normally reverse biased. Further protection of the inputs is provided by the two resistors (R in Figure 44), in conjunction with the string of anti-parallel diodes connected between both bases of the input stage. The combination of these resistors and diodes reduces excessive differential input voltages approaching $2V_{be}$. The most common situation when this occurs is when the device is put in shutdown and the LMH6639's inputs no longer follow each other. In such a case, the diodes may conduct. As a consequence, input current increases, and a portion of signal may appear at the Hi-Z output. Another possible situation for the conduction of these diodes is when the LMH6639 is used as a comparator (or with little or no feedback). In either case, it is important to make sure that the subsequent current flow through the device input pins does not violate the [Absolute Maximum Ratings](#) of the device. To limit the current through the protection circuit extra series resistors can be placed. Together with the build in series resistors of several hundred ohms this extra resistors can limit the input current to a safe number depending on the used application. Be aware of the effect that extra series resistors may impact the switching speed of the device. A special situation occurs when the part is configured for a gain of +1, which means the output is directly connected to the inverting input, see Figure 45. When the part is now placed in shutdown mode the output comes in a high impedance state and is unable to keep the inverting input at the same level as the non-inverting input. In many applications the output is connected to the ground via a low impedance resistor. When this situation occurs and there is a DC voltage offset of more than 2 volt between the non-inverting input and the output, current flows from the non-inverting input through the series resistors R via the bypass diodes to the output. Now the input current becomes much bigger than expected and in many cases the source at the input cannot deliver this current and will drop down. Be sure in this situation that no DC current path is available from the non-inverting input to the output pin, or from the output pin to the load resistor. This DC path is drawn by a curved line and can be broken by placing one of the capacitors C_{IN} or C_{OUT} or both, depending on the used application.

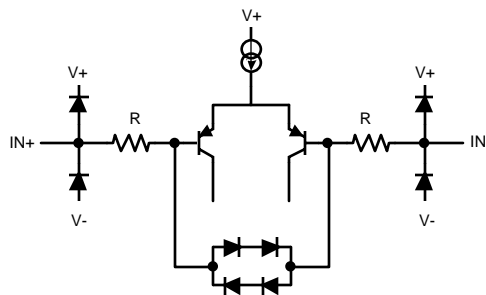


Figure 44.


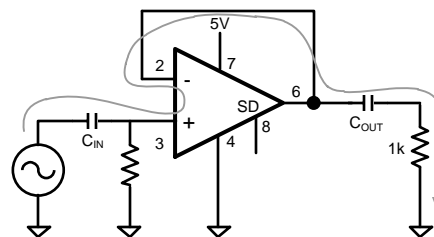


Figure 45. DC path while in shutdown

MULTIPLEXING 5 AND 10MHz

The LMH6639 may be used to implement a circuit which multiplexes two signals of different frequencies. Three LMH6639 high speed op-amps are used in the circuit of [Figure 46](#) to accomplish the multiplexing function. Two LMH6639 are used to provide gain for the input signals, and the third device is used to provide output gain for the selected signal.

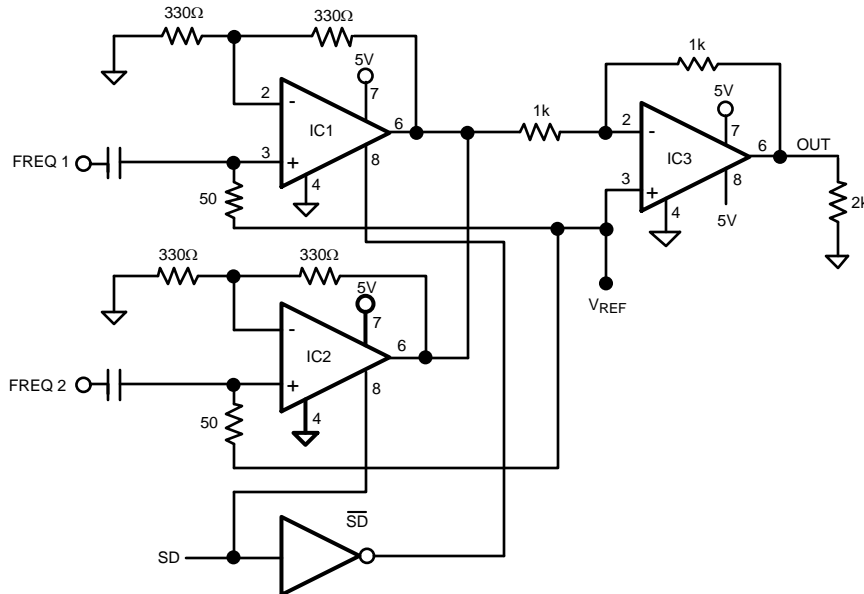

Note: Pin numbers pertain to SOIC-8 package

Figure 46. Multiplexer

Multiplexing signals “FREQ 1” and “FREQ 2” exhibit closed loop non-inverting gain of +2 each based upon identical 330Ω resistors in the gain setting positions of IC1 and IC2. The two multiplexing signals are combined at the input of IC3, which is the third LMH6639. This amplifier may be used as a unity gain buffer or may be used to set a particular gain for the circuit.

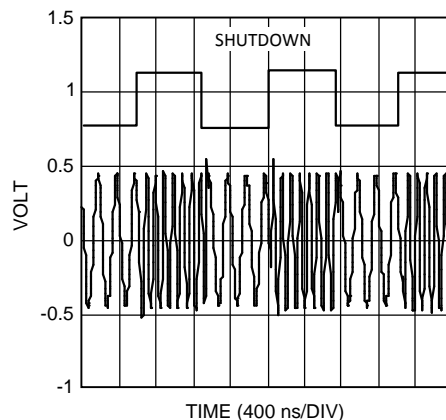


Figure 47. Switching between 5 and 10MHz

1k resistors are used to set an inverting gain of -1 for IC3 in the circuit of [Figure 46](#). [Figure 47](#) illustrates the waveforms produced. The upper trace shows the switching waveform used to switch between the 5MHz and 10MHz multiplex signals. The lower trace shows the output waveform consisting of 5MHz and 10MHz signals corresponding to the high or low state of the switching signal.

In the circuit of [Figure 46](#), the outputs of IC1 and IC2 are tied together such that their output impedances are placed in parallel at the input of IC3. The output impedance of the disabled amplifier is high compared both to the output impedance of the active amplifier and the 330Ω gain setting resistors. The closed loop output resistance for the LMH6639 is around 0.2Ω. Thus the active state amplifier output impedance dominates the input node to IC3, while the disabled amplifier is assured of a high level of suppression of unwanted signals which might be present at the output.

SHUTDOWN OPERATION

With \overline{SD} pin left floating, the device enters normal operation. However, since the \overline{SD} pin has high input impedance, it is best tied to V^+ for normal operation. This will avoid inadvertent shutdown due to capacitive pick-up from nearby nodes. LMH6639 will typically go into shutdown when \overline{SD} pin is more than 1.7V below V^+ , regardless of operating supplies.

The \overline{SD} pin can be driven by push-pull or open collector (open drain) output logic. Because the LMH6639's shutdown is referenced to V^+ , interfacing to the shutdown logic is rather simple, for both single and dual supply operation, with either form of logic used. Typical configurations are shown in [Figure 48](#) and [Figure 49](#) below for push-pull output:

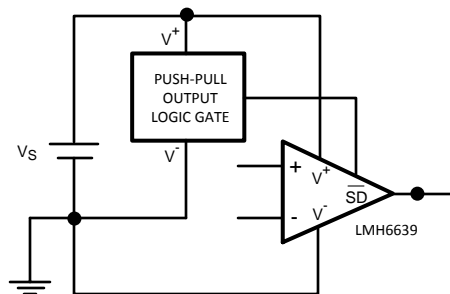


Figure 48. Shutdown Interface (Single Supply)

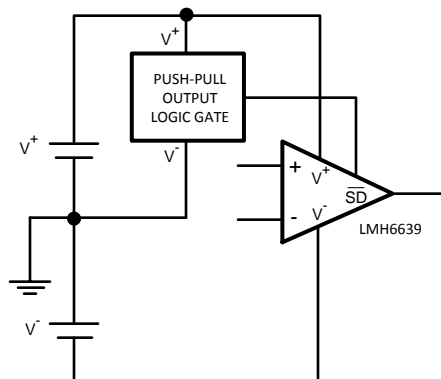


Figure 49. Shutdown Interface (Dual Supplies)

Common voltages for logic gates are +5V or +3V. To ensure proper power on/off with these supplies, the logic should be able to swing to 3.4V and 1.4V minimum, respectively.

LMH6639's shutdown pin can also be easily controlled in applications where the analog and digital sections are operated at different supplies. [Figure 50](#) shows a configuration where a logic output, SD, can turn the LMH6639 on and off, independent of what supplies are used for the analog and the digital sections:

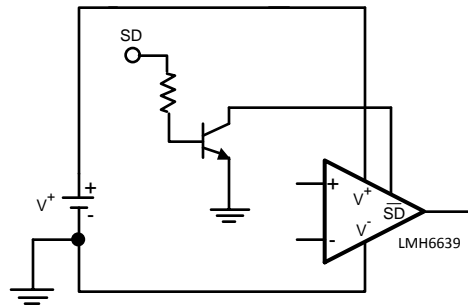


Figure 50. Shutdown Interface (Single Supply, Open Collector Logic)

The LMH6639 has an internal pull-up resistor on \overline{SD} such that if left un-connected, the device will be in normal operation. Therefore, no pull-up resistor is needed on this pin. Another common application is where the transistor in [Figure 50](#) above, would be internal to an open collector (open drain) logic gate; the basic connections will remain the same as shown.

PCB LAYOUT CONSIDERATION AND COMPONENTS SELECTION

Care should be taken while placing components on a PCB. All standard rules should be followed especially the ones for high frequency and/ or high gain designs. Input and output pins should be separated to reduce cross-talk, especially under high gain conditions. A groundplane will be helpful to avoid oscillations. In addition, a ground plane can be used to create micro-strip transmission lines for matching purposes. Power supply, as well as shutdown pin de-coupling will reduce cross-talk and chances of oscillations.

Another important parameter in working with high speed amplifiers is the component values selection. Choosing high value resistances reduces the cut-off frequency because of the influence of parasitic capacitances. On the other hand choosing the resistor values too low could "load down" the nodes and will contribute to higher overall power dissipation. Keeping resistor values at several hundreds of ohms up to several k Ω will offer good performance.

Texas Instruments suggests the following evaluation boards as a guide for high frequency layout and as an aid in device testing and characterization:

| Device | Package | Evaluation Board PN |
|-----------|------------|---------------------|
| LMH6639MA | 8-Pin SOIC | CLC730027 |
| LMH6639MF | SOT-23-6 | CLC730116 |

REVISION HISTORY**Changes from Revision F (March 2013) to Revision G****Page**

PACKAGING INFORMATION

| Orderable Device | Status (1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan (2) | Lead/Ball Finish (6) | MSL Peak Temp (3) | Op Temp (°C) | Device Marking (4/5) | Samples |
|------------------|---------------|--------------|-----------------|------|-------------|-------------------------|-------------------------|----------------------|--------------|-------------------------|-------------------------|
| LMH6639 MDC | ACTIVE | DIESALE | Y | 0 | 400 | Green (RoHS & no Sb/Br) | Call TI | Level-1-NA-UNLIM | -40 to 85 | | Samples |
| LMH6639MA | NRND | SOIC | D | 8 | 95 | TBD | Call TI | Call TI | -40 to 85 | LMH66 39MA | |
| LMH6639MA/NOPB | ACTIVE | SOIC | D | 8 | 95 | Green (RoHS & no Sb/Br) | CU SN | Level-1-260C-UNLIM | -40 to 85 | LMH66 39MA | Samples |
| LMH6639MAX/NOPB | ACTIVE | SOIC | D | 8 | 2500 | Green (RoHS & no Sb/Br) | CU SN | Level-1-260C-UNLIM | -40 to 85 | LMH66 39MA | Samples |
| LMH6639MF | NRND | SOT-23 | DBV | 6 | 1000 | TBD | Call TI | Call TI | -40 to 85 | A81A | |
| LMH6639MF/NOPB | ACTIVE | SOT-23 | DBV | 6 | 1000 | Green (RoHS & no Sb/Br) | CU SN | Level-1-260C-UNLIM | -40 to 85 | A81A | Samples |
| LMH6639MFX/NOPB | ACTIVE | SOT-23 | DBV | 6 | 3000 | Green (RoHS & no Sb/Br) | CU SN | Level-1-260C-UNLIM | -40 to 85 | A81A | Samples |

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

⁽⁶⁾ Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LMH6639MAX/NOPB | SOIC | D | 8 | 2500 | 330.0 | 12.4 | 6.5 | 5.4 | 2.0 | 8.0 | 12.0 | Q1 |
| LMH6639MF | SOT-23 | DBV | 6 | 1000 | 178.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| LMH6639MF/NOPB | SOT-23 | DBV | 6 | 1000 | 178.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |
| LMH6639MFX/NOPB | SOT-23 | DBV | 6 | 3000 | 178.0 | 8.4 | 3.2 | 3.2 | 1.4 | 4.0 | 8.0 | Q3 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LMH6639MAX/NOPB | SOIC | D | 8 | 2500 | 367.0 | 367.0 | 35.0 |
| LMH6639MF | SOT-23 | DBV | 6 | 1000 | 210.0 | 185.0 | 35.0 |
| LMH6639MF/NOPB | SOT-23 | DBV | 6 | 1000 | 210.0 | 185.0 | 35.0 |
| LMH6639MFX/NOPB | SOT-23 | DBV | 6 | 3000 | 210.0 | 185.0 | 35.0 |

MECHANICAL DATA

DBV (R-PDSO-G6)

PLASTIC SMALL-OUTLINE PACKAGE

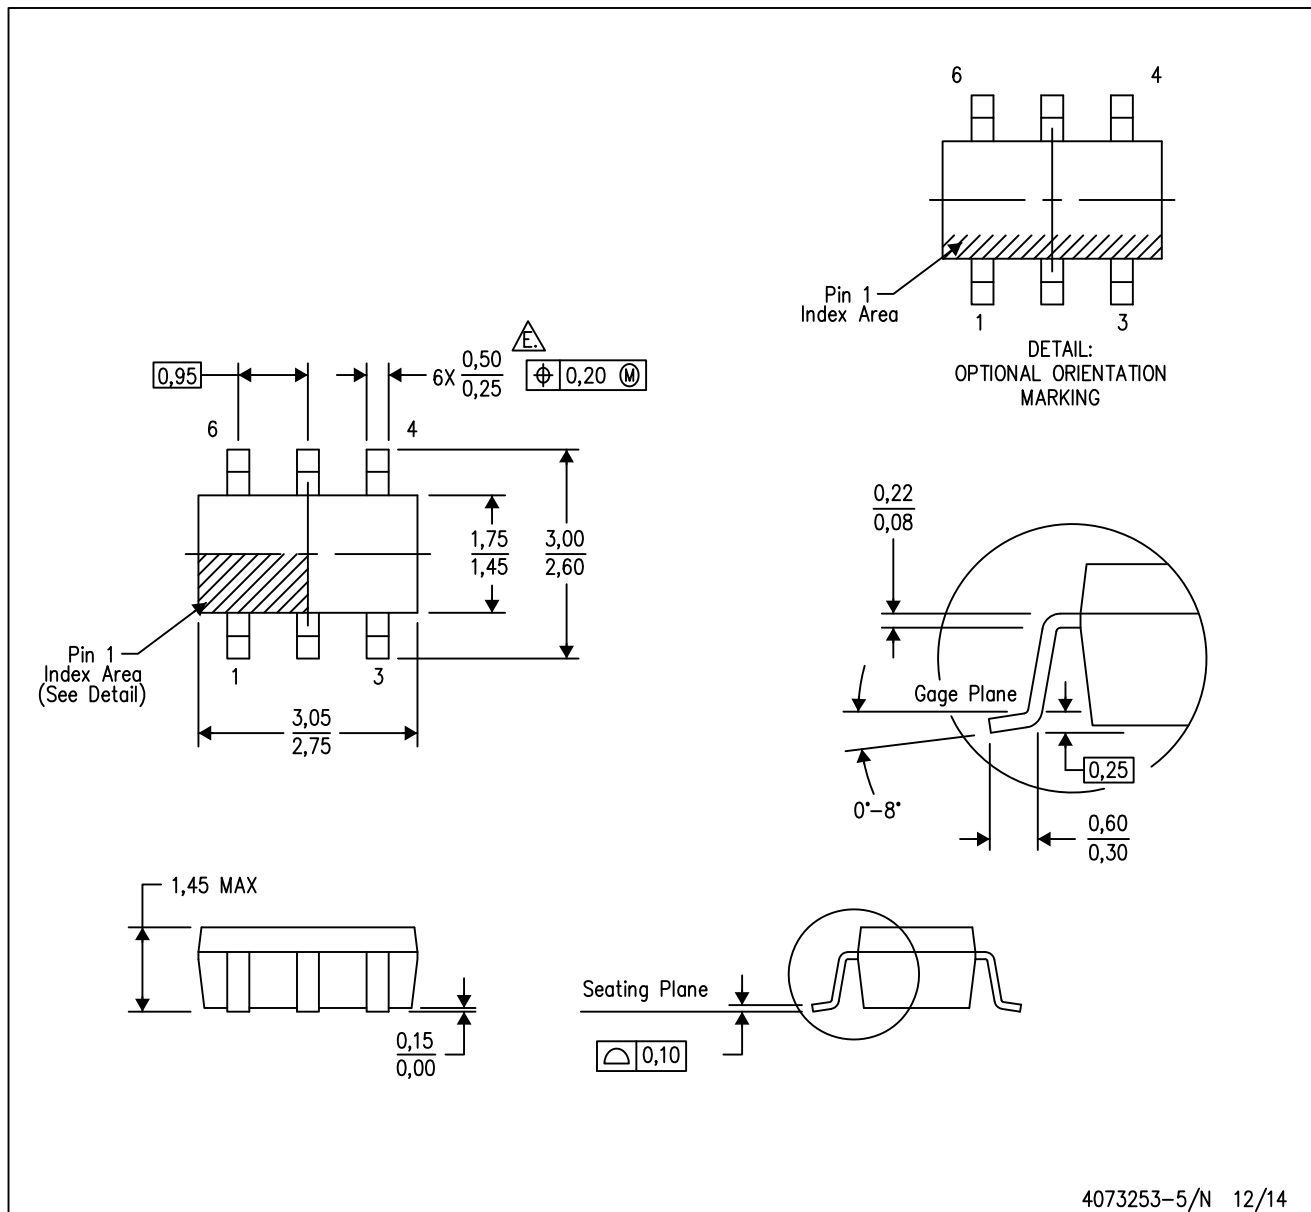

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
 - D. Leads 1,2,3 may be wider than leads 4,5,6 for package orientation.
- Falls within JEDEC MO-178 Variation AB, except minimum lead width.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE



4040047-3/M 06/11

IMPORTANT NOTICE

Texas Instruments Incorporated (TI) reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

TI's published terms of sale for semiconductor products (<http://www.ti.com/sc/docs/stdterms.htm>) apply to the sale of packaged integrated circuit products that TI has qualified and released to market. Additional terms may apply to the use or sale of other types of TI products and services.

Reproduction of significant portions of TI information in TI data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such reproduced documentation. Information of third parties may be subject to additional restrictions. Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyers and others who are developing systems that incorporate TI products (collectively, "Designers") understand and agree that Designers remain responsible for using their independent analysis, evaluation and judgment in designing their applications and that Designers have full and exclusive responsibility to assure the safety of Designers' applications and compliance of their applications (and of all TI products used in or for Designers' applications) with all applicable regulations, laws and other applicable requirements. Designer represents that, with respect to their applications, Designer has all the necessary expertise to create and implement safeguards that (1) anticipate dangerous consequences of failures, (2) monitor failures and their consequences, and (3) lessen the likelihood of failures that might cause harm and take appropriate actions. Designer agrees that prior to using or distributing any applications that include TI products, Designer will thoroughly test such applications and the functionality of such TI products as used in such applications.

TI's provision of technical, application or other design advice, quality characterization, reliability data or other services or information, including, but not limited to, reference designs and materials relating to evaluation modules, (collectively, "TI Resources") are intended to assist designers who are developing applications that incorporate TI products; by downloading, accessing or using TI Resources in any way, Designer (individually or, if Designer is acting on behalf of a company, Designer's company) agrees to use any particular TI Resource solely for this purpose and subject to the terms of this Notice.

TI's provision of TI Resources does not expand or otherwise alter TI's applicable published warranties or warranty disclaimers for TI products, and no additional obligations or liabilities arise from TI providing such TI Resources. TI reserves the right to make corrections, enhancements, improvements and other changes to its TI Resources. TI has not conducted any testing other than that specifically described in the published documentation for a particular TI Resource.

Designer is authorized to use, copy and modify any individual TI Resource only in connection with the development of applications that include the TI product(s) identified in such TI Resource. NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER TI INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT OF TI OR ANY THIRD PARTY IS GRANTED HEREIN, including but not limited to any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information regarding or referencing third-party products or services does not constitute a license to use such products or services, or a warranty or endorsement thereof. Use of TI Resources may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

TI RESOURCES ARE PROVIDED "AS IS" AND WITH ALL FAULTS. TI DISCLAIMS ALL OTHER WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, REGARDING RESOURCES OR USE THEREOF, INCLUDING BUT NOT LIMITED TO ACCURACY OR COMPLETENESS, TITLE, ANY EPIDEMIC FAILURE WARRANTY AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS. TI SHALL NOT BE LIABLE FOR AND SHALL NOT DEFEND OR INDEMNIFY DESIGNER AGAINST ANY CLAIM, INCLUDING BUT NOT LIMITED TO ANY INFRINGEMENT CLAIM THAT RELATES TO OR IS BASED ON ANY COMBINATION OF PRODUCTS EVEN IF DESCRIBED IN TI RESOURCES OR OTHERWISE. IN NO EVENT SHALL TI BE LIABLE FOR ANY ACTUAL, DIRECT, SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF TI RESOURCES OR USE THEREOF, AND REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Unless TI has explicitly designated an individual product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949 and ISO 26262), TI is not responsible for any failure to meet such industry standard requirements.

Where TI specifically promotes products as facilitating functional safety or as compliant with industry functional safety standards, such products are intended to help enable customers to design and create their own applications that meet applicable functional safety standards and requirements. Using products in an application does not by itself establish any safety features in the application. Designers must ensure compliance with safety-related requirements and standards applicable to their applications. Designer may not use any TI products in life-critical medical equipment unless authorized officers of the parties have executed a special contract specifically governing such use. Life-critical medical equipment is medical equipment where failure of such equipment would cause serious bodily injury or death (e.g., life support, pacemakers, defibrillators, heart pumps, neurostimulators, and implantables). Such equipment includes, without limitation, all medical devices identified by the U.S. Food and Drug Administration as Class III devices and equivalent classifications outside the U.S.

TI may expressly designate certain products as completing a particular qualification (e.g., Q100, Military Grade, or Enhanced Product). Designers agree that it has the necessary expertise to select the product with the appropriate qualification designation for their applications and that proper product selection is at Designers' own risk. Designers are solely responsible for compliance with all legal and regulatory requirements in connection with such selection.

Designer will fully indemnify TI and its representatives against any damages, costs, losses, and/or liabilities arising out of Designer's non-compliance with the terms and provisions of this Notice.