




**SAMZO REAC/ROHS**

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12

技术要求:

**Technical requirements:**

1. 打铜底0.5-1UM, 镍底1-3UM, 哑锡3-5UM。  
Copper base 0.5 - 1 UM, nickel base 1-3UM, matte tin 3 - 5 UM.
2. 不得有脚变形, 毛刺等缺陷。  
There shall be no defects such as pin deformation and burrs.
3. 插脚尖部符合可焊性要求。  
The tip of the insertion pin shall meet the solderability requirements.
4. 螺纹需符合通止规要求。  
The thread shall meet the requirements of the go and no-go gauge.
5. 材质: 黄铜H62。  
Material: Brass H62.
6. 过载电流: 100A  
Overload current: 100A
7. 螺孔为 M5  
The screw holes M5
8. 未标注尺寸公差值按GB/T1184-1996H级  
Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996
9. 螺丝扭力: 2.0Nm  
Screw torque: 2.0Nm

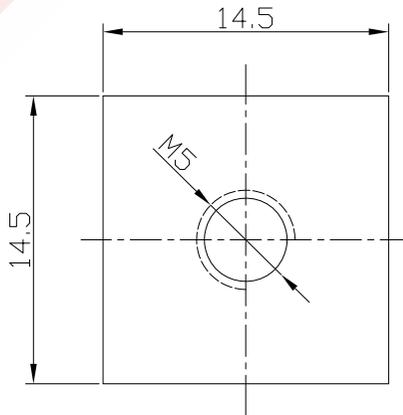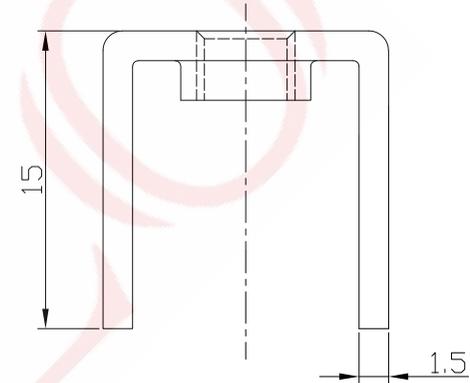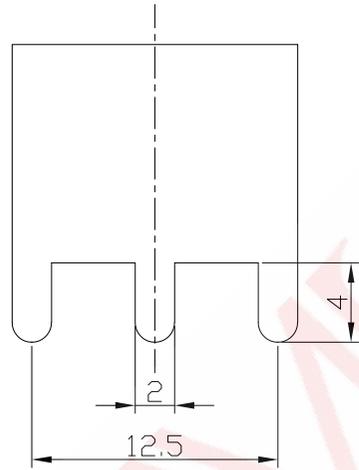

**145 110 40 1 L5**

Pressing hole specification: M5  
Mold number: S019-H  
Pin height: 4.0mm  
Height above the board: 11.0mm  
Specification size: 14.5\*14.5mm

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR					
A	Subject	H62(Y2)	1	tin plating					
							GENERAL TOLERANCE		
							≥0~2<	±0.15	
					DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25
					CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
F					APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35

FIRST VIEW

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.  
WWW.KKK-JP.COM

SCALE 1:1 UNIT mm

**SAMZO COMPONENTS**  
Electronic switch and connector manufacturer

TITLE: 14.5*14.5-H11+4mm (M5)	
DWG NO: 145150-P098	
PART NO: 145110-202360	
MODEL NO: 145110401L5	
NAME: PCB soldering terminal	