





SAMZO REAC/ROHS

| REV | ECN NO | DESCRIPTION | DESIGN | APPROVAL | DATE |
|-----|--------|---------------|--------|----------|------------|
| A1 | NEW | Replace frame | | | 2018.06.12 |

技术要求:

Technical requirements:

1. 打铜底0.5-1UM, 镍底1-3UM, 哑锡3-5UM。
Copper base 0.5 - 1 UM, nickel base 1-3UM, matte tin 3 - 5 UM.
2. 不得有脚变形, 毛刺等缺陷。
There shall be no defects such as pin deformation and burrs.
3. 插脚尖部符合可焊性要求。
The tip of the insertion pin shall meet the solderability requirements.
4. 螺纹需符合通止规要求。
The thread shall meet the requirements of the go and no-go gauge.
5. 材质: 黄铜H62。
Material: Brass H62.
6. 过载电流: 80A
Overload current: 80A
7. 螺孔为 M4
The screw holes M4
8. 未标注尺寸公差值按GB/T1184-1996H级
Unmarked dimensional tolerance values are in accordance with Grade H of GB/T1184-1996
9. 螺丝扭力: 2.5Nm
Screw torque: 2.5Nm

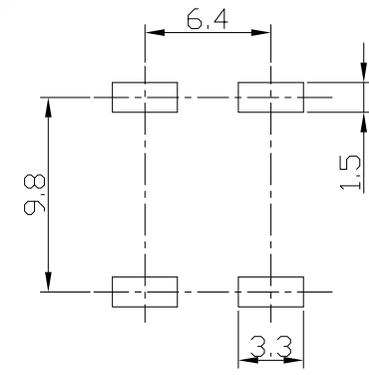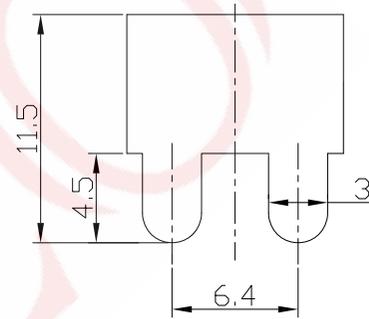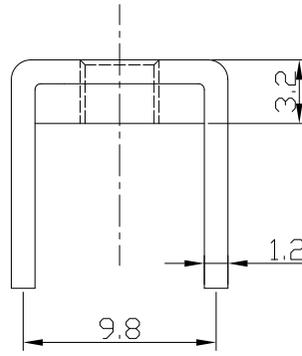

11 70 45 1 D4

- Pressing hole specification: M4
- Mold number: C041-H
- Pin height: 4.5mm
- Height above the board: 7.0mm
- Specification size: 11*11mm

PCB LAYOUT

| | | | | | | | | | | | | | | |
|---|------|-------------|----------|-----|--------------|-------------------|------------|------------|-------|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------|-----------------------|
| A | ITEM | DESCRIPTION | MATERIAL | QTY | FINISH/COLOR | | | | | FIRST VIEW | The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM | TITLE:: | | |
| | A | Subject | H62(Y2) | 1 | tin plating | | | | | | | 11*11-H7.0+4.5mm (M4) | | |
| | B | Gasket | SPCC | 1 | tin plating | GENERAL TOLERANCE | | | | | | DWG NO: 1170-P036 | | |
| | | | | | | | ≥0~2< | ±0.15 | SCALE | 1:1 | | UNIT | mm | PART NO: 1170-2018360 |
| | | | | | | DESIGN | WANGGUIFA | 2018.06.12 | ≥2~5< | ±0.25 | | SAMZO COMPONENTS | | |
| | | | | | CHECKED | ZHENGUILAN | 2018.06.12 | ≥0~2< | ±0.15 | Electronic switch and connector manufacturer | | | NAME: | |
| F | | | | | APPROVED | LILIANJIANG | 2018.06.14 | ≥5 | ±0.35 | | | | PCB soldering terminal | |