

## Low Power Low Dropout Middle Current Voltage Regulators

### General Description

The LN6206 series are precise, low power consumption, high voltage; positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage. The LN6206 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error correction circuit. The series is compatible with low ESR ceramic capacitors. The current limiter's feedback circuit also operates as a short protect for the output current limiter and the output pin. Output voltage can be set internally by laser trimming technologies. It is selectable in 100mV increments within a range of 1.2V to 5.0V. SOT-89-3, SOT-23-3 and SOT23-3B packages are available.

### Package



- SOT-89-3
- SOT-23-3L/SOT-23-3B

### Ordering Information

#### LN6206P ①②③④⑤

Designator	Symbol	Description	Designator	Symbol	Description
① ②	Integer	Output Voltage: e.g. ①=3, ②=0 ⇒ 3.0V	④	P	SOT-89-3
				V	SOT-23-3B
③	1	Accuracy: within ±1%	⑤	R	Embossed Tape: standard Feed
	2	Accuracy: within ±2%			
④		Package	⑤	L	Embossed Tape: reverse Feed
	M	SOT-23-3			

### Pin Configuration



Pin number		Pin Name	Function
SOT-23-3L/B	SOT-89-3L		
3	2	VIN	Power Supply
1	1	VSS	Ground
2	3	VOUT	Output Pin

### Features


- Output voltage range: 1.2V to 5.0V (selectable in 100mV steps)
- Highly optional accurate: ±1% or ±2%
- Dropout voltage: 160mV @ 50mA (3.0V type)
- Low power consumption: 2μA (TYP.)
- Maximum output current: 250mA ( $V_{in} \geq V_{out} + 1V$ )
- Internal protector current limiter and short protector
- Small packages : SOT-89-3, SOT-23-3, SOT23-3B and other required

### Applications


- Battery powered equipment
- Reference voltage sources
- Cameras, video cameras
- Mobile phones
- Communication tools

## Marking Rule

- SOT-89 -3 and SOT-23L/B



SOT-89-3L  
(Top View)



SOT-23-3L/SOT-23-3B  
(Top View)

- ① Represents product series

Symbol	Product Series
6	LN6206P◆◆◆◆◆

- ② Represents the type of regulator

Voltage(V)	0.1~3.0	3.1~6.0	6.1~9.0
±2%	5	6	7
±1%	A	B	C


- ③ Represents the Output Voltage

Symbol	Output Voltage (V)			Symbol	Output Voltage (V)		
0	-	3.1	-	F	1.6	4.6	-
1	-	3.2	-	H	1.7	4.7	-
2	-	3.3	-	K	1.8	4.8	-
3	-	3.4	-	L	1.9	4.9	-
4	-	3.5	-	M	2	5.0	-
5	-	3.6	-	N	2.1	5.1	-
6	-	3.7	-	P	2.2	5.2	-
7	-	3.8	-	R	2.3	5.3	-
8	-	3.9	-	S	2.4	5.4	-
9	-	4	-	T	2.5	5.5	-
A	-	4.1	-	U	2.6	5.6	-
B	1.2	4.2	-	V	2.7	5.7	-
C	1.3	4.3	-	X	2.8	5.8	-
D	1.4	4.4	-	Y	2.9	5.9	-
E	1.5	4.5	-	Z	3	6.0	-

- ④ Represents the assembly lot no.

0~9, A~Z repeated (G,I,J,O,Q,W excepted)

## Function Block Diagram

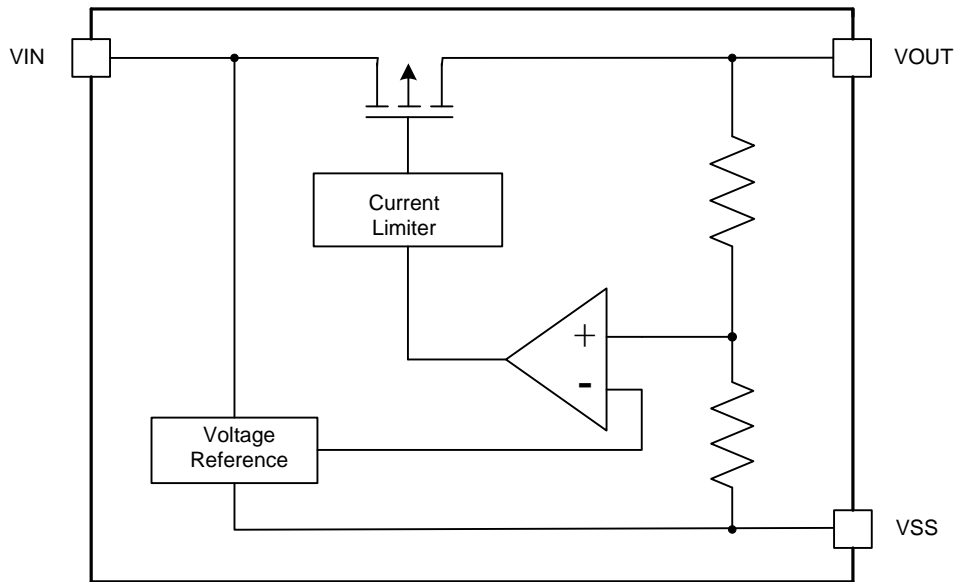


## Absolute Maximum Ratings

Parameter	Symbol	Maximum Rating	Unit	
Input Voltage	$V_{IN}$	$V_{SS}-0.3 \sim V_{SS}+6$	V	
Output Current	$V_{OUT}$	$V_{SS}-0.3 \sim V_{IN}+0.3$		
Power Dissipation	$P_D$	SOT-23-3L	250	mW
		SOT23-3B	150	
		SOT-89-3	500	
Operating Ambient Temperature	$T_{opr}$	$-40 \sim +85$	°C	
Storage Temperature	$T_{stg}$	$-40 \sim +125$		


**Caution:** The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

## Test Circuits

Circuit ①

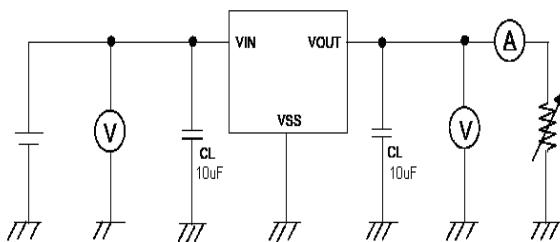


Circuit ②

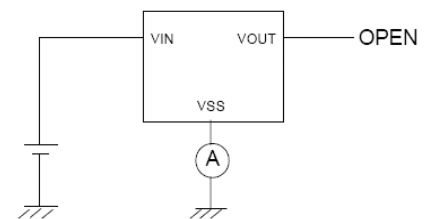


## Typical Application Circuit


### 1、Basic circuit

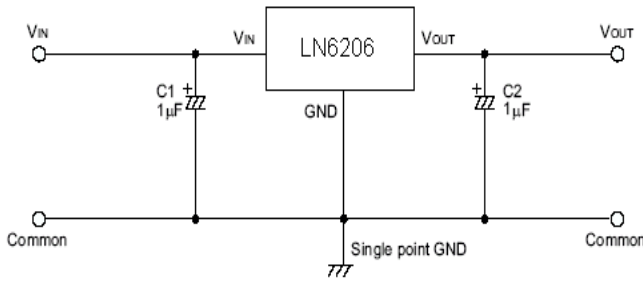

### 2、High output current positive voltage regulator

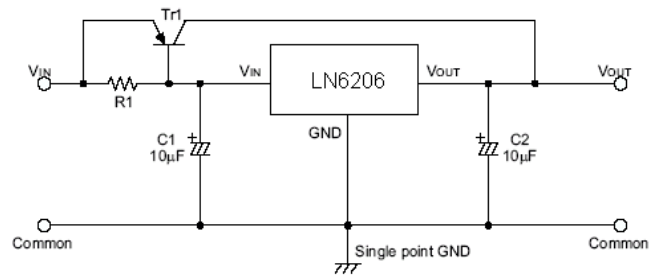


### 3、Circuit for increasing output voltage

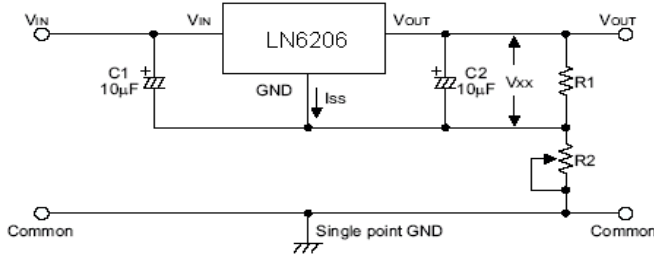


$$V_{OUT} = V_{XX} \left( 1 + \frac{R_2}{R_1} \right) + I_{SS} R_2$$

### 4、Circuit for increasing output voltage

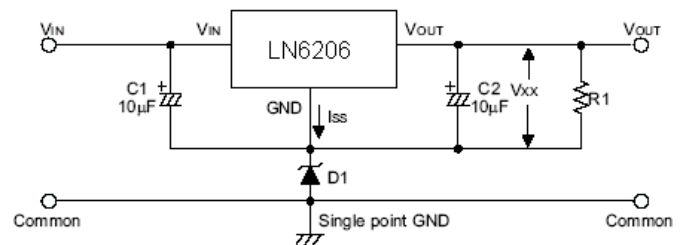


$$V_{OUT} = V_{XX} + V_{D1}$$

### 5、Constant current regulator

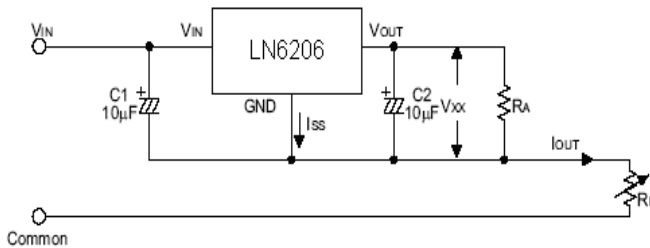

$$I_{OUT} = \frac{V_{XX}}{R_A} + I_{SS}$$

### 6、Dual supply

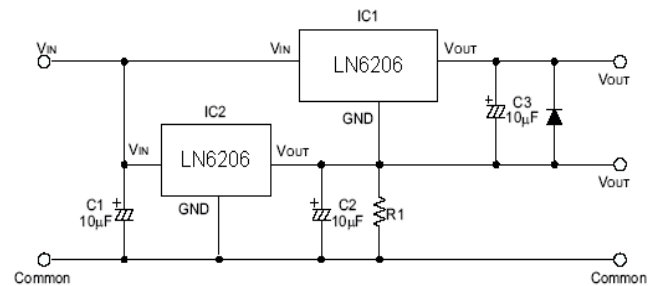

**Caution:** The above connection diagram and constant will not guarantee successful operation. Perform thorough evaluation using the actual application to set the constant.

## Application Conditions

Input capacitor (CIN): 1.0μF or more

Output capacitor (CL): 0.1 μF or more (tantalum capacitor)

**Caution** A general series regulator may oscillate, depending on the external components selected. Check that no oscillation occurs with the application using the above capacitor.


**Electrical Characteristics**
 $V_{IN}=4.0V, V_{OUT}=3.0V, T=25^{\circ}C$ 

Item	Symbol	Condition	Min	Typ	Max	Unit	Circuit	
Output Voltage	$V_{OUT(E)1}$	$V_{IN}=V_{OUT(S)}+1.0V, I_{OUT}=1mA,$ $\pm 2\%$	$V_{OUT(S)}$ $\times 0.98$	$V_{OUT(S)}$	$V_{OUT(S)}$ $\times 1.02$	V	1	
		$V_{IN}=V_{OUT(S)}+1.0V, I_{OUT}=1mA,$ $\pm 1\%$	$V_{OUT(S)}$ $\times 0.99$	$V_{OUT(S)}$	$V_{OUT(S)}$ $\times 1.01$	V		
Output Current	$I_{OUT}$	$V_{IN} \geq V_{OUT(S)} + 1.0V$	250 <sup>*1</sup>	—	—	mA	1	
Dropout Voltage	$V_{drop}$	$I_{OUT}=50mA$	$1.5V \leq V_{OUT(S)} \leq 2.5V$	—	0.20	0.28	V	1
			$2.6V \leq V_{OUT(S)} \leq 3.3V$	—	0.16	0.24		
			$3.4V \leq V_{OUT(S)} \leq 5.0V$	—	0.12	0.20		
Line Regulations	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	$V_{OUT(S)}+0.5V \leq V_{IN} \leq 5.5V$ $I_{OUT}=1mA$	—	0.05	0.2	%/V	1	
Input Voltage	$\Delta V_{OUT2}$	$V_{IN}=V_{OUT(S)}+1.0V$ $1.0mA \leq I_{OUT} \leq 50mA$	—	20	40	mV	1	
Output Voltage Temperature Characteristics	$\frac{\Delta V_{OUT}}{\Delta Ta \cdot V_{OUT}}$	$V_{IN}=V_{OUT(S)}+1.0V,$ $I_{OUT}=10mA$ $-40^{\circ}C \leq Ta \leq 85^{\circ}C$	—	$\pm 100$	—	ppm/ $^{\circ}C$	1	
Supply Current	$I_{SS1}$	$V_{IN}=V_{OUT(S)}+1.0V$	—	2	—	$\mu A$	2	
Input Voltage	$V_{IN}$	—	1.8	—	6	V	—	
Ripple-Rejection	RR	$V_{IN}=V_{OUT(S)}+1.0V, f=1.0kHz$ $V_{rip}=0.5V_{rms}, I_{OUT}=10mA$	—	40	—	dB	1	
Short current	$I_{short}$	$V_{IN}=V_{OUT(S)}+1.5V,$	—	30	—	mA	1	
Current Limiter	$I_{lim}$	$V_{IN}=V_{OUT(S)}+1.5V,$	—	380	—	mA	1	


Note1: Lower input voltage and the output voltage, maximum output current will decrease. Example:  
 $I_{OUT}(\max)=150mA @ (V_{IN}=2.5V, V_{OUT}=1.5V)$

## Typical Performance Characteristics (3.0V output)


### 1. Output Voltage vs. Output Current

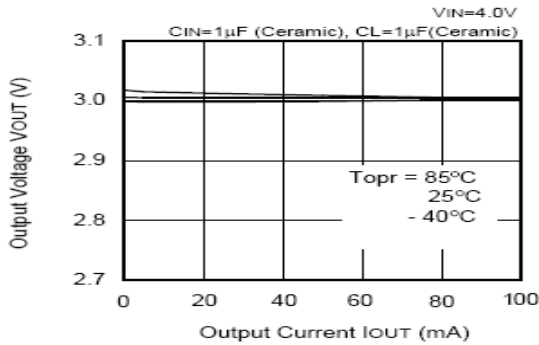


### 2. Output Voltage vs. Input Voltage

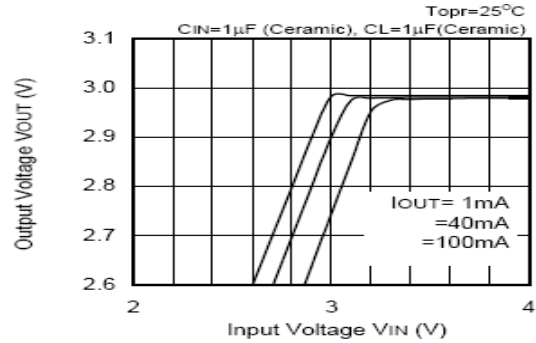


### 3. Dropout Voltage vs. Output Current

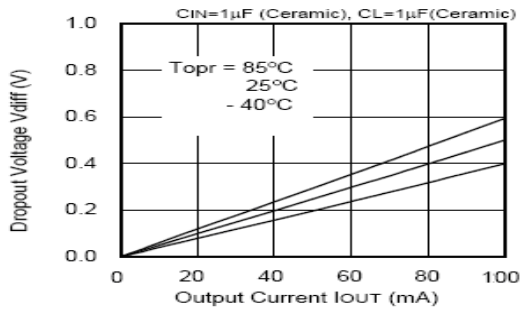


### 4. Dropout Voltage vs. Output Voltage

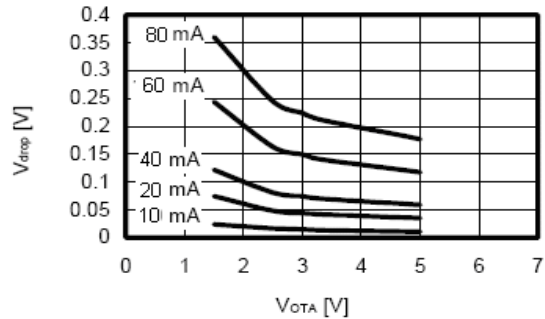

### 5. Output Voltage vs. Ambient Temperature

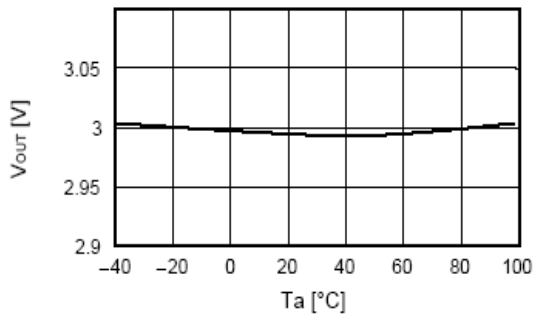


### 6. Ripple Rejection Rate

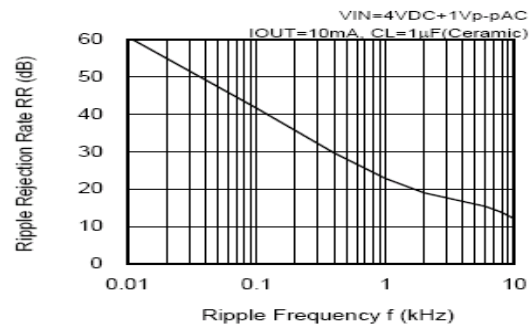


### 7. Transient Response

#### Input Transient Response

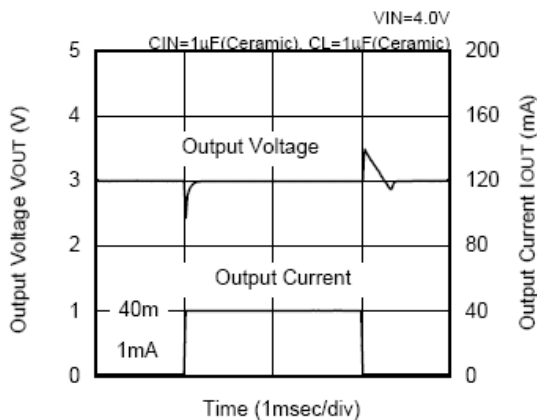


#### Load Transient Response

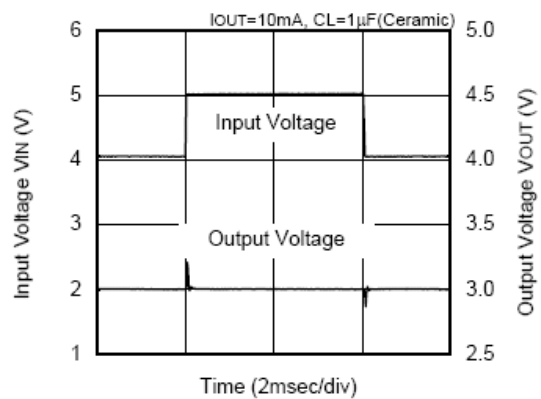


■ Packaging Information

- SOT-89-3

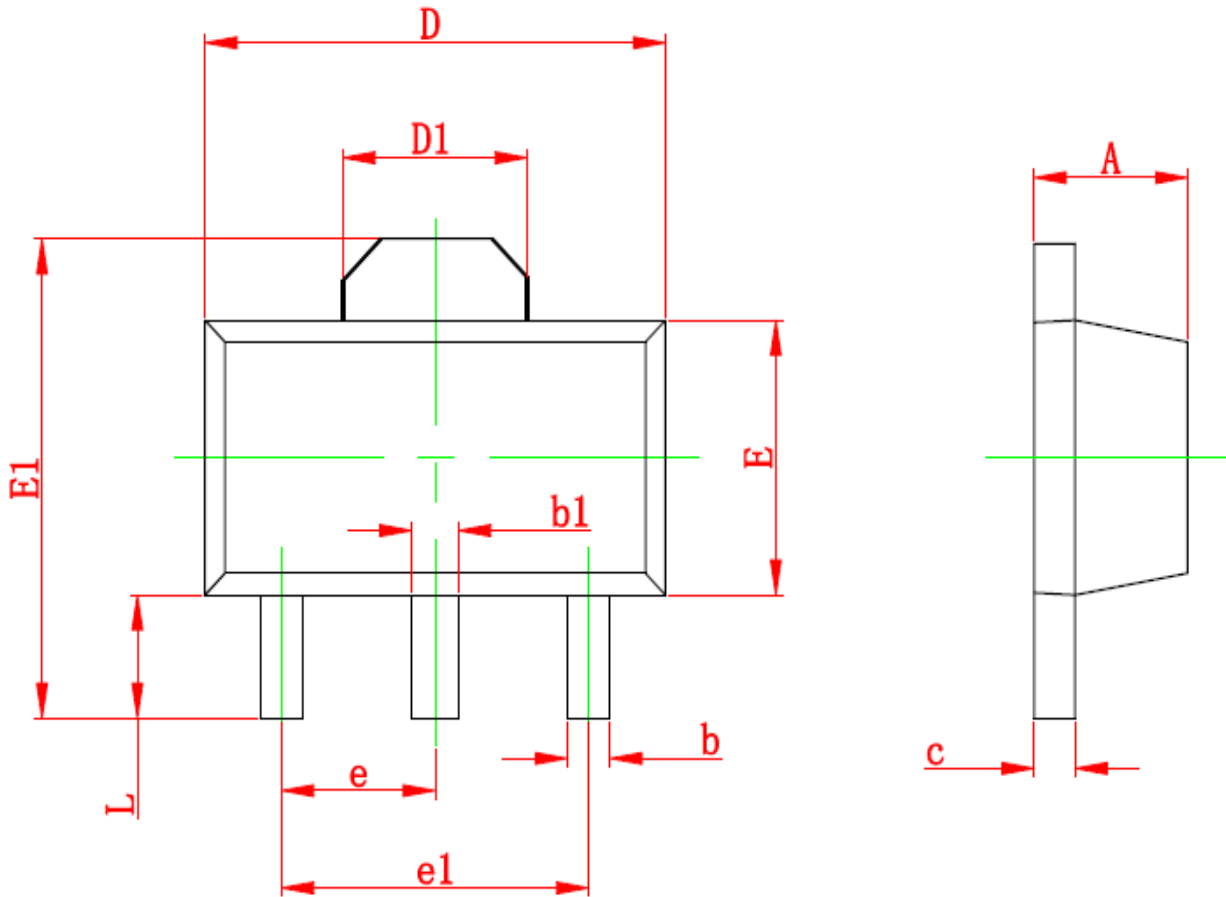

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.197
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060TYP	
e1	3.000 TYP		0.118TYP	
L	0.900	1.200	0.035	0.047


● SOT-23-3L

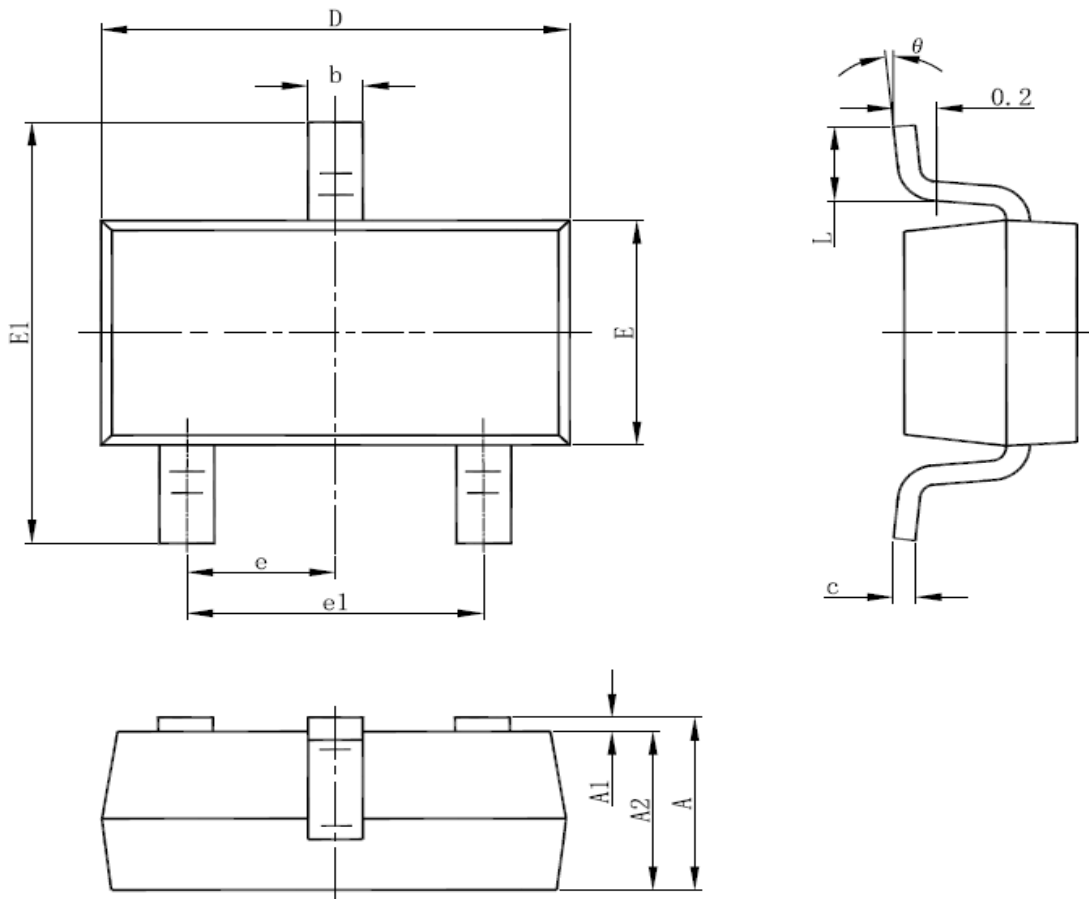

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



● SOT-23-3B

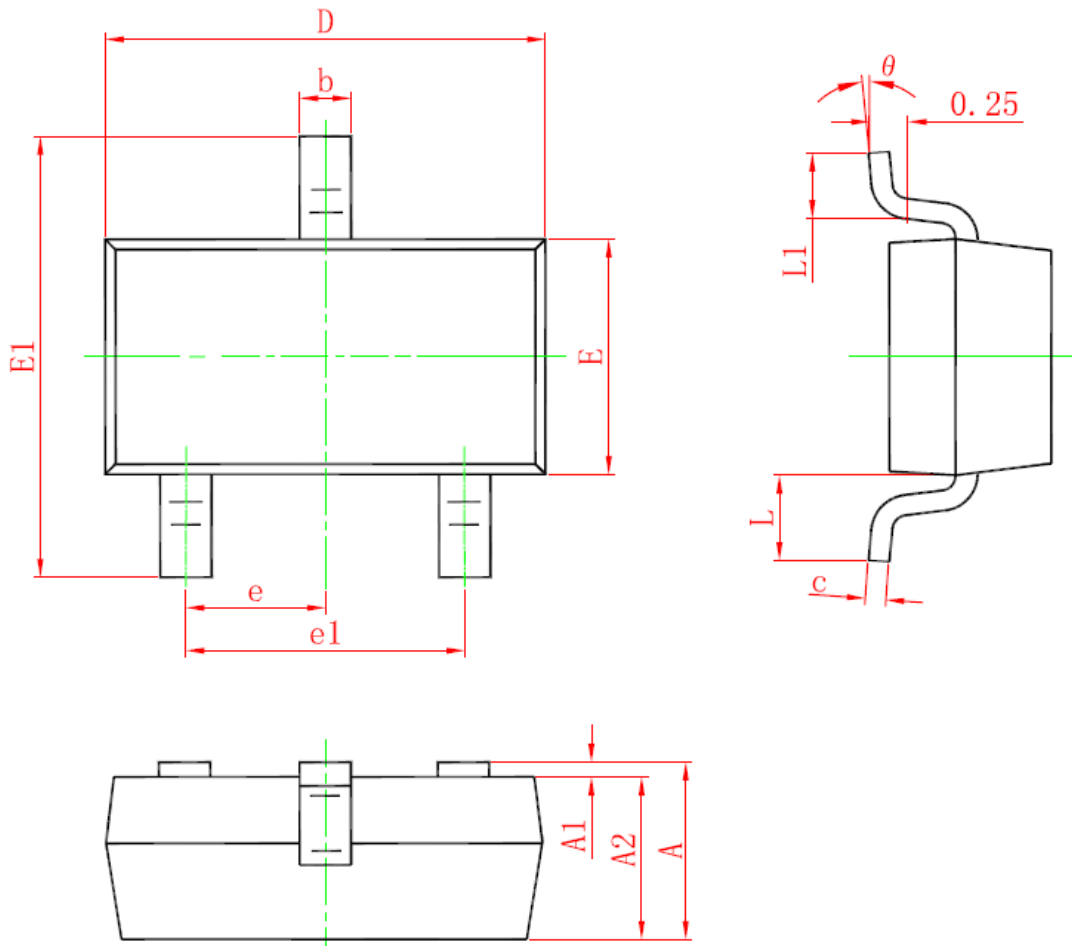

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
$\theta$	0°	8°	0°	8°