


## KBJ15005 thru KBJ1510



### 15 A Single-Phase Silicon Bridge Rectifier Rectifier Reverse Voltage 50 to 1000V

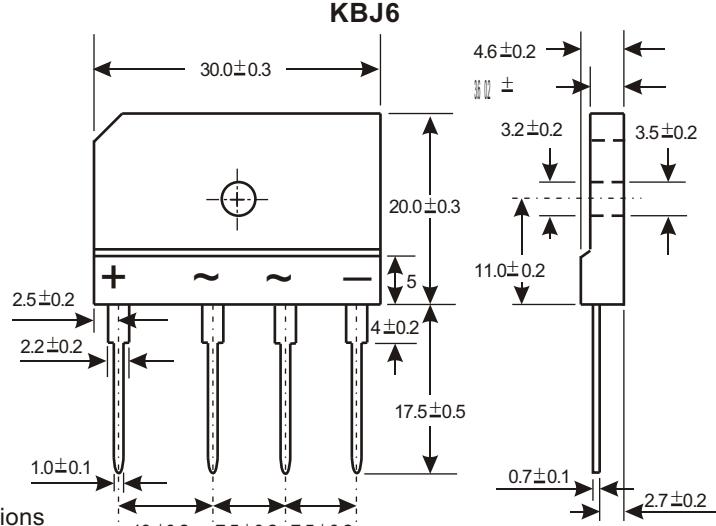

#### Features

- This series is UL listed under the Recognized Component Index, file number E142814
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High case dielectric strength of 1500VRMS Ideal for printed circuit boards
- High surge current capability

#### Mechanical Data

Case : Molded plastic body over passivated junctions  
Terminals : Plated leads solderable per MIL-STD-750,  
Method 2026

Polarity : Polarity symbols molded on body

Mounting Position : Any(3)

Mounting Torque : 5 in-lbs max.

Weight : 0.26 ounce, 7.0 grams (approx)

Dimensions in millimeters(1mm = 0.0394")

#### Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.  
For Capacitive load derate current by 20%.

Parameter	Symbol	KBJ 15005	KBJ 1501	KBJ 1502	KBJ 1504	KBJ 1506	KBJ 1508	KBJ 1510	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward (with heatsink note1 ) rectified current at Tc=100°C (without heatsink)	IF(AV)				15.0	3.2			A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				240				A
Rating for fusing ( t<8.3ms)	I <sup>2</sup> t				240				A <sup>2</sup> sec
Typical thermal resistance per element (note 1)	RthJC				0.8				°C / W
Operating junction and storage temperature range	TJ, TSTG				-55 to + 150				°C

#### Electrical Characteristics


Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.  
For Capacitive load derate by 20 %.

Parameter	Symbol	KBJ 15005	KBJ 1501	KBJ 1502	KBJ 1504	KBJ 1506	KBJ 1508	KBJ 1510	Unit
Maximum instantaneous forward voltage drop per leg at 7.5 A	VF				1.05				V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C	IR				10.0	500			μA


Notes: (1) Device mounted on 300mm x 300mm x 1.6mm copper plate heatsink.

**Rating and Characteristic Curves (  $T_A=25^\circ\text{C}$  Unless otherwise noted )**  
**KBJ15005 thru KBJ1510**


**Fig. 1 Derating Curve for Output Rectified Current**

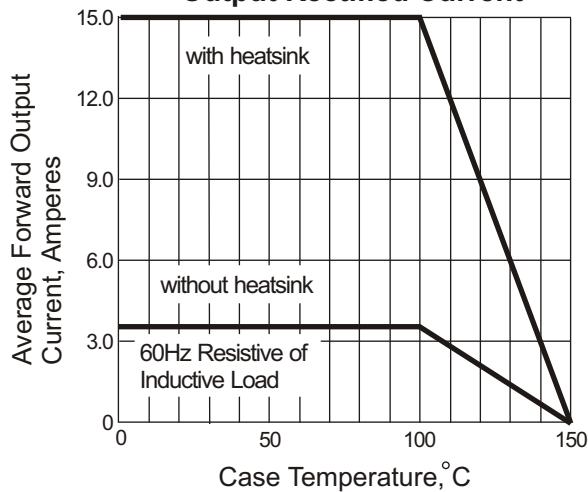


**Fig. 2 Maximum Non-repetitive Peak Forward Surge Current**

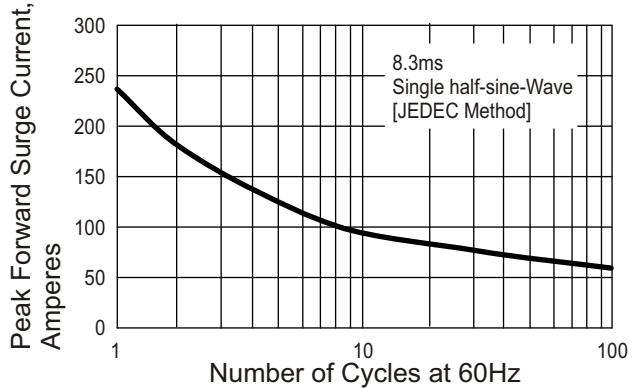

**Fig. 3 Typical Instantaneous Forward Characteristics**

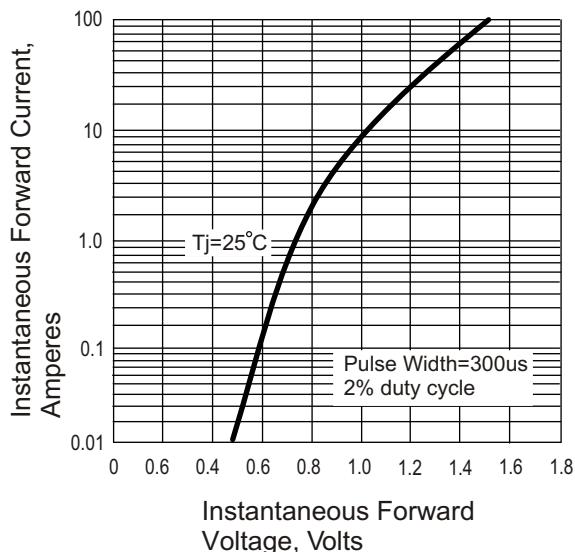

**Fig. 4 Typical Reverse Characteristics at  $T_J=25^\circ\text{C}$**

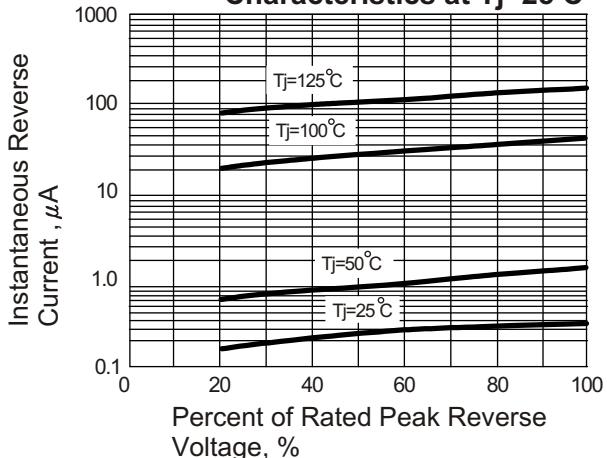

**Fig. 5 Typical Junction Capacitance**

