

REALTEK

RTL8201FR-VB-CG

SINGLE-CHIP/PORT 10/100M ETHERNET PHYCEIVER WITH AUTO MDIX

DATASHEET

(CONFIDENTIAL: Development Partners Only)

Rev. 1.9

26 May 2020

Track ID: JATR-8275-15



REALTEK

Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

Tel.: +886-3-578-0211. Fax: +886-3-577-6047

www.realtek.com

COPYRIGHT

©2020 Realtek Semiconductor Corp. All rights reserved. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Realtek Semiconductor Corp.

DISCLAIMER

Realtek provides this document 'as is', without warranty of any kind. Realtek may make improvements and/or changes in this document or in the product described in this document at any time. This document could include technical inaccuracies or typographical errors.

TRADEMARKS

Realtek is a trademark of Realtek Semiconductor Corporation. Other names mentioned in this document are trademarks/registered trademarks of their respective owners.

LICENSE

This product is covered by one or more of the following patents: US5,307,459, US5,434,872, US5,732,094, US6,570,884, US6,115,776, and US6,327,625.

USING THIS DOCUMENT

This document is intended for the software engineer's reference and provides detailed programming information.

Though every effort has been made to ensure that this document is current and accurate, more information may have become available subsequent to the production of this guide.

ELECTROSTATIC DISCHARGE (ESD) WARNING

This product can be damaged by Electrostatic Discharge (ESD). When handling, care must be taken. Damage due to inappropriate handling is not covered by warranty.

Do not open the protective conductive packaging until you have read the following, and are at an approved anti-static workstation.

- Use an approved anti-static mat to cover your work surface.
- Use a conductive wrist strap attached to a good earth ground
- Always discharge yourself by touching a grounded bare metal surface or approved anti-static mat before picking up an ESD-sensitive electronic component
- If working on a prototyping board, use a soldering iron or station that is marked as ESD-safe
- Always disconnect the microcontroller from the prototyping board when it is being worked on

REVISION HISTORY

Revision	Release Date	Summary
1.0	2011/01/04	First release.
1.1	2011/02/18	Added section 7.23 MMD Register Mapping and Definition, page 22. Revised Table 43 Absolute Maximum Ratings, page 40. Revised section 9.1.3 Power On and PHY Reset Sequence, page 41.
1.2	2011/04/21	Revised section 2 Features, page 2. Revised Figure 2 Block Diagram, page 4. Revised Table 2 RMII Interface, page 6. Revised Table 6 Device Configuration Interface, page 8. Revised Table 8 Register 0 Basic Mode Control Register, page 10. Revised Table 12 Register 4 Auto-Negotiation Advertisement Register (ANAR), page 13. Revised Table 17 Register 24, page 16. Revised Table 21 Page4 Register 16 EEE Capability Enable Register, page 17. Revised Table 22 Page4 Register 21 EEE Capability Register, page 18. Revised Table 27 Page7 Register 19 Interrupt and LEDs Function Register, page 20. Added section 7.21 Page7 Register 23 Wake-On-LAN and Interrupt Function Control Register, page 21. Added section 7.22 Page7 Register 24 Spread Spectrum Clock Register, page 21. Added section 8.2 Interrupt, page 26. Revised section 8.1 Management Interface, page 25. Revised section 8.7 Reset and Transmit Bias, page 34. Added section 8.11 Wake-On-LAN (WOL), page 35. Added section 8.13 Spread Spectrum Clock (SSC), page 39. Added Figure 19 RMII Interfaces Setup, Hold Time, and Output Delay Time Definitions, page 43. Added Figure 21 MDC/MDIO Interfaces Setup, Hold Time, and Valid from MDC Rising Edge Time Definitions, page 45.
1.3	2011/07/14	Added Figure 1 Application Diagram, page 3. Revised Table 27 Page7 Register 19 Interrupt and LEDs Function Registers, page 20. Added Table 32 EEEPC1R (PCS Control 1 Register, MMD Device 3, Address 0x00), page 22. Added Table 33 EEEPS1R (PCS Status 1 Register, MMD Device 3, Address 0x01), page 22. Added section 8.4.1 LED and PHY Address, page 28. Added section 8.4.8 EEE LED Behavior, page 32. Revised section 8.7 Reset and Transmit Bias, page 34.
1.4	2011/07/27	Revised Table 2 RMII Interface, page 6.
1.5	2012/06/13	Revised Table 6 Device Configuration Interface, page 8.
1.6	2014/07/24	Revised Table 48 RMII Transmission and Reception Cycle Timing, page 44. Revised Table 51 Oscillator Requirements, page 46. Revised Table 52 Clock Requirements, page 47.
1.7	2014/10/21	Revised Table 43 Absolute Maximum Ratings, page 40. Revised Table 47 Input Voltage: Vcc, page 42.
1.8	2018/07/31	Revised Figure 3 Pin Assignments, page 5 (Realtek logo marking on IC).
1.9	2020/5/26	Revised Table 48 RMII Transmission and Reception Cycle Timing, page 44.

Table of Contents

1. GENERAL DESCRIPTION	1
2. FEATURES	2
3. APPLICATIONS.....	3
3.1. APPLICATION DIAGRAM	3
4. BLOCK DIAGRAM.....	4
5. PIN ASSIGNMENTS	5
5.1. GREEN PACKAGE AND VERSION IDENTIFICATION	5
6. PIN DESCRIPTIONS	6
6.1. SERIAL MANAGEMENT INTERFACE	6
6.2. RMII INTERFACE	6
6.3. CLOCK INTERFACE	7
6.4. 10/100Mbps NETWORK INTERFACE	7
6.5. TRANSMIT BIAS REFERENCE.....	7
6.6. DEVICE CONFIGURATION INTERFACE.....	8
6.7. POWER, GROUND, AND RESET PINS	9
7. REGISTER DESCRIPTIONS	10
7.1. REGISTER 0 BASIC MODE CONTROL REGISTER.....	10
7.2. REGISTER 1 BASIC MODE STATUS REGISTER.....	12
7.3. REGISTER 2 PHY IDENTIFIER REGISTER 1	12
7.4. REGISTER 3 PHY IDENTIFIER REGISTER 2	13
7.5. REGISTER 4 AUTO-NEGOTIATION ADVERTISEMENT REGISTER (ANAR).....	13
7.6. REGISTER 5 AUTO-NEGOTIATION LINK PARTNER ABILITY REGISTER (ANLPA)	14
7.7. REGISTER 6 AUTO-NEGOTIATION EXPANSION REGISTER (ANER).....	15
7.8. PAGE0 REGISTER 13 MACR (MMD ACCESS CONTROL REGISTER; ADDRESS 0x0D)	15
7.9. PAGE0 REGISTER 14 MAADR (MMD ACCESS ADDRESS DATA REGISTER; ADDRESS 0x0E).....	16
7.10. REGISTER 24 POWER SAVING MODE REGISTER (PSMR).....	16
7.11. REGISTER 28 FIBER MODE AND LOOPBACK REGISTER	16
7.12. REGISTER 30 INTERRUPT INDICATORS AND SNR DISPLAY REGISTER	17
7.13. REGISTER 31 PAGE SELECT REGISTER.....	17
7.14. PAGE4 REGISTER 16 EEE CAPABILITY ENABLE REGISTER.....	17
7.15. PAGE4 REGISTER 21 EEE CAPABILITY REGISTER	18
7.16. PAGE7 REGISTER 16 RMII MODE SETTING REGISTER (RMSR).....	18
7.17. PAGE7 REGISTER 17 CUSTOMIZED LEDs SETTING REGISTER.....	19
7.18. PAGE7 REGISTER 18 EEE LEDs ENABLE REGISTER	19
7.19. PAGE7 REGISTER 19 INTERRUPT AND LEDs FUNCTION REGISTERS	20
7.20. PAGE7 REGISTER 20 RMII TX ISOLATE REGISTER	21
7.21. PAGE7 REGISTER 23 WAKE-ON-LAN AND INTERRUPT FUNCTION CONTROL REGISTERS.....	21
7.22. PAGE7 REGISTER 24 SPREAD SPECTRUM CLOCK REGISTER.....	21
7.23. MMD REGISTER MAPPING AND DEFINITION	22
7.23.1. EEPC1R (PCS Control 1 Register, MMD Device 3, Address 0x00)	22
7.23.2. EEPS1R (PCS Status 1 Register, MMD Device 3, Address 0x01)	22
7.23.3. EECCR (EEE Capability Register, MMD Device 3; Address 0x14).....	23
7.23.4. EEWER (EEE Wake Error Register, MMD Device 3; Address 0x16).....	23
7.23.5. EEER (EEE Advertisement Register, MMD Device 7; Address 0x3c)	23
7.23.6. EEELPAR (EEE Link Partner Ability Register, MMD Device 7; Address 0x3d).....	23

8.	FUNCTIONAL DESCRIPTION.....	24
8.1.	MANAGEMENT INTERFACE	25
8.2.	INTERRUPT	26
8.3.	AUTO-NEGOTIATION AND PARALLEL DETECTION.....	27
8.3.1.	Setting the Medium Type to MAC	27
8.4.	LED FUNCTIONS.....	28
8.4.1.	LED and PHY Address.....	28
8.4.2.	Link Monitor.....	28
8.4.3.	RX LED.....	29
8.4.4.	TX LED.....	29
8.4.5.	TX/RX LED.....	30
8.4.6.	LINK/ACT LED.....	30
8.4.7.	Customized LED.....	31
8.4.8.	EEE LED Behavior.....	32
8.5.	POWER DOWN AND LINK DOWN POWER SAVING MODES.....	32
8.6.	10/100M TRANSMIT AND RECEIVE	33
8.6.1.	100Base-TX Transmit and Receive Operation.....	33
8.6.2.	100Base-FX Fiber Transmit and Receive Operation.....	33
8.6.3.	10Base-T Transmit and Receive Operation.....	33
8.7.	RESET AND TRANSMIT BIAS	34
8.8.	3.3V POWER SUPPLY AND VOLTAGE CONVERSION CIRCUIT	34
8.9.	AUTOMATIC POLARITY CORRECTION.....	35
8.10.	FAR END FAULT INDICATION.....	35
8.11.	WAKE-ON-LAN (WOL)	35
8.11.1.	Magic Packet and Wake-Up Frame Format.....	35
8.11.2.	Active Low Wake-On-LAN.....	36
8.11.3.	Pulse Low Wake-On-LAN.....	37
8.11.4.	Wake-On-LAN Pin Types.....	38
8.12.	ENERGY EFFICIENT ETHERNET (EEE).....	38
8.13.	SPREAD SPECTRUM CLOCK (SSC).....	39
9.	CHARACTERISTICS.....	40
9.1.	DC CHARACTERISTICS	40
9.1.1.	Absolute Maximum Ratings.....	40
9.1.2.	Operating Conditions.....	40
9.1.3.	Power On and PHY Reset Sequence	41
9.1.4.	RMII Input Mode Power Dissipation.....	42
9.1.5.	Input Voltage: Vcc.....	42
9.2.	AC CHARACTERISTICS	43
9.2.1.	RMII Transmission and Reception Cycle Timing	43
9.2.2.	MDC/MDIO Timing.....	45
9.3.	CRYSTAL CHARACTERISTICS	46
9.4.	OSCILLATOR REQUIREMENTS	46
9.5.	CLOCK REQUIREMENTS	47
9.6.	TRANSFORMER CHARACTERISTICS.....	47
10.	MECHANICAL DIMENSIONS	48
11.	ORDERING INFORMATION	49

List of Tables

TABLE 1. SERIAL MANAGEMENT INTERFACE	6
TABLE 2. RMII INTERFACE	6
TABLE 3. CLOCK INTERFACE	7
TABLE 4. 10/100Mbps NETWORK INTERFACE	7
TABLE 5. TRANSMIT BIAS REFERENCE.....	7
TABLE 6. DEVICE CONFIGURATION INTERFACE.....	8
TABLE 7. POWER, GROUND, AND RESET PINS.....	9
TABLE 8. REGISTER 0 BASIC MODE CONTROL REGISTER	10
TABLE 9. REGISTER 1 BASIC MODE STATUS REGISTER.....	12
TABLE 10. REGISTER 2 PHY IDENTIFIER REGISTER 1	12
TABLE 11. REGISTER 3 PHY IDENTIFIER REGISTER 2	13
TABLE 12. REGISTER 4 AUTO-NEGOTIATION ADVERTISEMENT REGISTER (ANAR).....	13
TABLE 13. REGISTER 5 AUTO-NEGOTIATION LINK PARTNER ABILITY REGISTER (ANLPAR)	14
TABLE 14. REGISTER 6 AUTO-NEGOTIATION EXPANSION REGISTER (ANER)	15
TABLE 15. PAGE0 REGISTER 13 MACR (MMD ACCESS CONTROL REGISTER; ADDRESS 0x0D)	15
TABLE 16. PAGE0 REGISTER 14 MAADR (MMD ACCESS ADDRESS DATA REGISTER; ADDRESS 0x0E)	16
TABLE 17. REGISTER 24 POWER SAVING MODE REGISTER (PSMR).....	16
TABLE 18. REGISTER 28 FIBER MODE AND LOOPBACK REGISTER.....	16
TABLE 19. REGISTER 30 INTERRUPT INDICATORS AND SNR DISPLAY REGISTER	17
TABLE 20. REGISTER 31 PAGE SELECT REGISTER	17
TABLE 21. PAGE4 REGISTER 16 EEE CAPABILITY ENABLE REGISTER.....	17
TABLE 22. PAGE4 REGISTER 21 EEE CAPABILITY REGISTER.....	18
TABLE 23. PAGE7 REGISTER 16 RMII MODE SETTING REGISTER (RMSR).....	18
TABLE 24. CUSTOMIZED LED MATRIX TABLE	19
TABLE 25. PAGE7 REGISTER 17 CUSTOMIZED LEDs SETTING REGISTER	19
TABLE 26. PAGE7 REGISTER 18 EEE LEDs ENABLE REGISTER.....	19
TABLE 27. PAGE7 REGISTER 19 INTERRUPT AND LEDs FUNCTION REGISTERS.....	20
TABLE 28. PAGE7 REGISTER 20 RMII TX ISOLATE REGISTER	21
TABLE 29. PAGE7 REGISTER 23 WAKE-ON-LAN AND INTERRUPT FUNCTION CONTROL REGISTERS	21
TABLE 30. PAGE7 REGISTER 24 SPREAD SPECTRUM CLOCK REGISTER	21
TABLE 31. MMD REGISTER MAPPING AND DEFINITION	22
TABLE 32. EEPC1R (PCS CONTROL 1 REGISTER, MMD DEVICE 3, ADDRESS 0x00)	22
TABLE 33. EEPS1R (PCS STATUS 1 REGISTER, MMD DEVICE 3, ADDRESS 0x01)	22
TABLE 34. EECCR (EEE CAPABILITY REGISTER, MMD DEVICE 3; ADDRESS 0x14).....	23
TABLE 35. EEWER (EEE WAKE ERROR REGISTER, MMD DEVICE 3; ADDRESS 0x16).....	23
TABLE 36. EEEAR (EEE ADVERTISEMENT REGISTER, MMD DEVICE 7; ADDRESS 0x3C)	23
TABLE 37. EEELPAR (EEE LINK PARTNER ABILITY REGISTER, MMD DEVICE 7; ADDRESS 0x3D)	23
TABLE 38. MANAGEMENT FRAME FORMAT	25
TABLE 39. SERIAL MANAGEMENT.....	26
TABLE 40. SETTING THE MEDIUM TYPE TO MAC	27
TABLE 41. POWER SAVING MODE PIN SETTINGS	32
TABLE 42. WAKE-ON-LAN PIN TYPES	38
TABLE 43. ABSOLUTE MAXIMUM RATINGS	40
TABLE 44. OPERATING CONDITIONS	40
TABLE 45. POWER ON AND PHY RESET SEQUENCE	41
TABLE 46. RMII INPUT MODE POWER DISSIPATION (WHOLE SYSTEM)	42
TABLE 47. INPUT VOLTAGE: VCC.....	42
TABLE 48. RMII TRANSMISSION AND RECEPTION CYCLE TIMING	44
TABLE 49. MDC/MDIO TIMING	45
TABLE 50. CRYSTAL CHARACTERISTICS.....	46
TABLE 51. OSCILLATOR REQUIREMENTS	46
TABLE 52. CLOCK REQUIREMENTS.....	47

TABLE 53. TRANSFORMER CHARACTERISTICS	47
TABLE 54. ORDERING INFORMATION.....	49

List of Figures

FIGURE 1. APPLICATION DIAGRAM	3
FIGURE 2. BLOCK DIAGRAM.....	4
FIGURE 3. PIN ASSIGNMENTS	5
FIGURE 4. READ CYCLE	25
FIGURE 5. WRITE CYCLE.....	25
FIGURE 6. LED AND PHY ADDRESS CONFIGURATION	28
FIGURE 7. RX LED.....	29
FIGURE 8. TX LED.....	29
FIGURE 9. TX/RX LED.....	30
FIGURE 10. LINK/ACT LED	30
FIGURE 11. CUSTOMIZED LED WITH/WITHOUT LPI LED MODE	31
FIGURE 12. EEE LED BEHAVIOR	32
FIGURE 13. ACTIVE LOW WHEN RECEIVING A MAGIC PACKET	36
FIGURE 14. ACTIVE LOW WHEN RECEIVING A WAKE-UP FRAME	36
FIGURE 15. PULSE LOW WHEN RECEIVING A MAGIC PACKET	37
FIGURE 16. PULSE LOW WHEN RECEIVING A WAKE-UP FRAME	37
FIGURE 17. SPREAD SPECTRUM CLOCK	39
FIGURE 18. POWER ON AND PHY RESET SEQUENCE	41
FIGURE 19. RMII INTERFACES SETUP, HOLD TIME, AND OUTPUT DELAY TIME DEFINITIONS	43
FIGURE 20. RMII TRANSMISSION AND RECEPTION CYCLE TIMING	44
FIGURE 21. MDC/MDIO INTERFACES SETUP, HOLD TIME, AND VALID FROM MDC RISING EDGE TIME DEFINITIONS	45
FIGURE 22. MDC/MDIO TIMING	45

1. General Description

The RTL8201FR-VB-CG is a single-chip/single-port 10/100Mbps Ethernet PHYceiver that supports RMII (Reduced Media Independent Interface).

The RTL8201FR-VB implements all 10/100M Ethernet Physical-layer functions including the Physical Coding Sublayer (PCS), Physical Medium Attachment (PMA), Twisted Pair Physical Medium Dependent Sublayer (TP-PMD), 10Base-TX Encoder/Decoder, and Twisted-Pair Media Access Unit (TPMAU). The RTL8201FR-VB also supports auto MDIX.

A PECL (Pseudo Emitter Coupled Logic) interface is supported to connect with an external 100Base-FX fiber optical transceiver. The chip utilizes an advanced CMOS process to meet low voltage and low power requirements. With on-chip DSP (Digital Signal Processing) technology, the chip provides excellent performance under all operating conditions.

2. Features

- Supports IEEE 802.3az-2010 (EEE)
- 100Base-TX IEEE 802.3u Compatible
- 10Base-T IEEE 802.3 Compatible
- Supports RMII mode
- Full/half duplex operation
- Twisted pair or fiber mode output
- Supports Auto-Negotiation
- Supports power down mode
- Supports Link Down Power Saving
- Supports Base Line Wander (BLW) compensation
- Supports auto MDIX
- Supports Interrupt function
- Supports Wake-On-LAN (WOL)
- Adaptive Equalization
- Automatic Polarity Correction
- Two network status LEDs
- Supports 25MHz external crystal or OSC
- Supports 50MHz external Clock input
- Provides 50MHz clock source for MAC
- Low power supply 1.05V and 3.3V; 1.05V is generated by an internal regulator
- 0.11 μ m CMOS process
- 24-pin RMII QFN ‘Green’ package

3. Applications

- DTV (Digital TV)
- MAU (Media Access Unit)
- CNR (Communication and Network Riser)
- Game Console
- Printer and Office Machine
- DVD Player and Recorder
- Ethernet Hub
- Ethernet Switch

In addition, the RTL8201FR-VB can be used in any embedded system with an Ethernet MAC that needs a UTP physical connection or Fiber PECL interface to an external 100Base-FX optical transceiver module.

3.1. Application Diagram

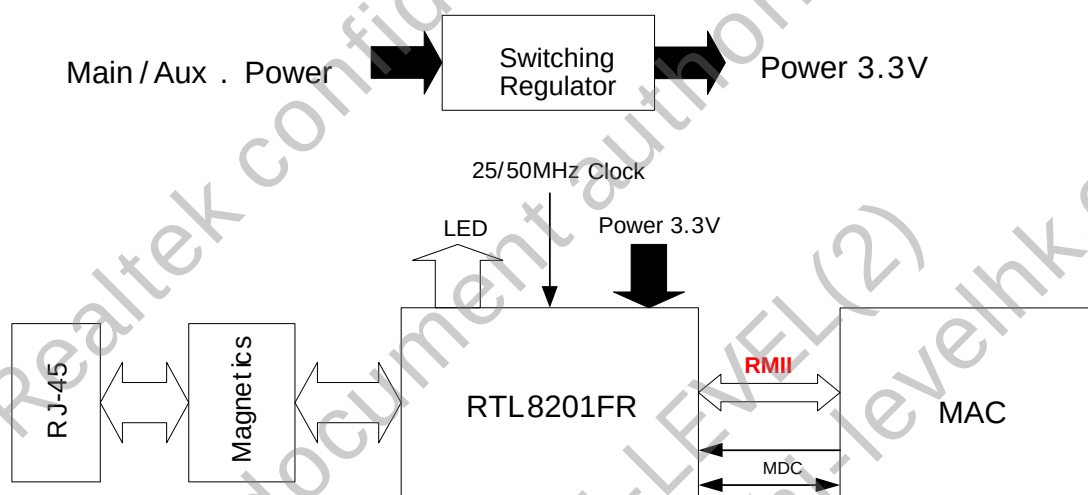


Figure 1. Application Diagram

4. Block Diagram

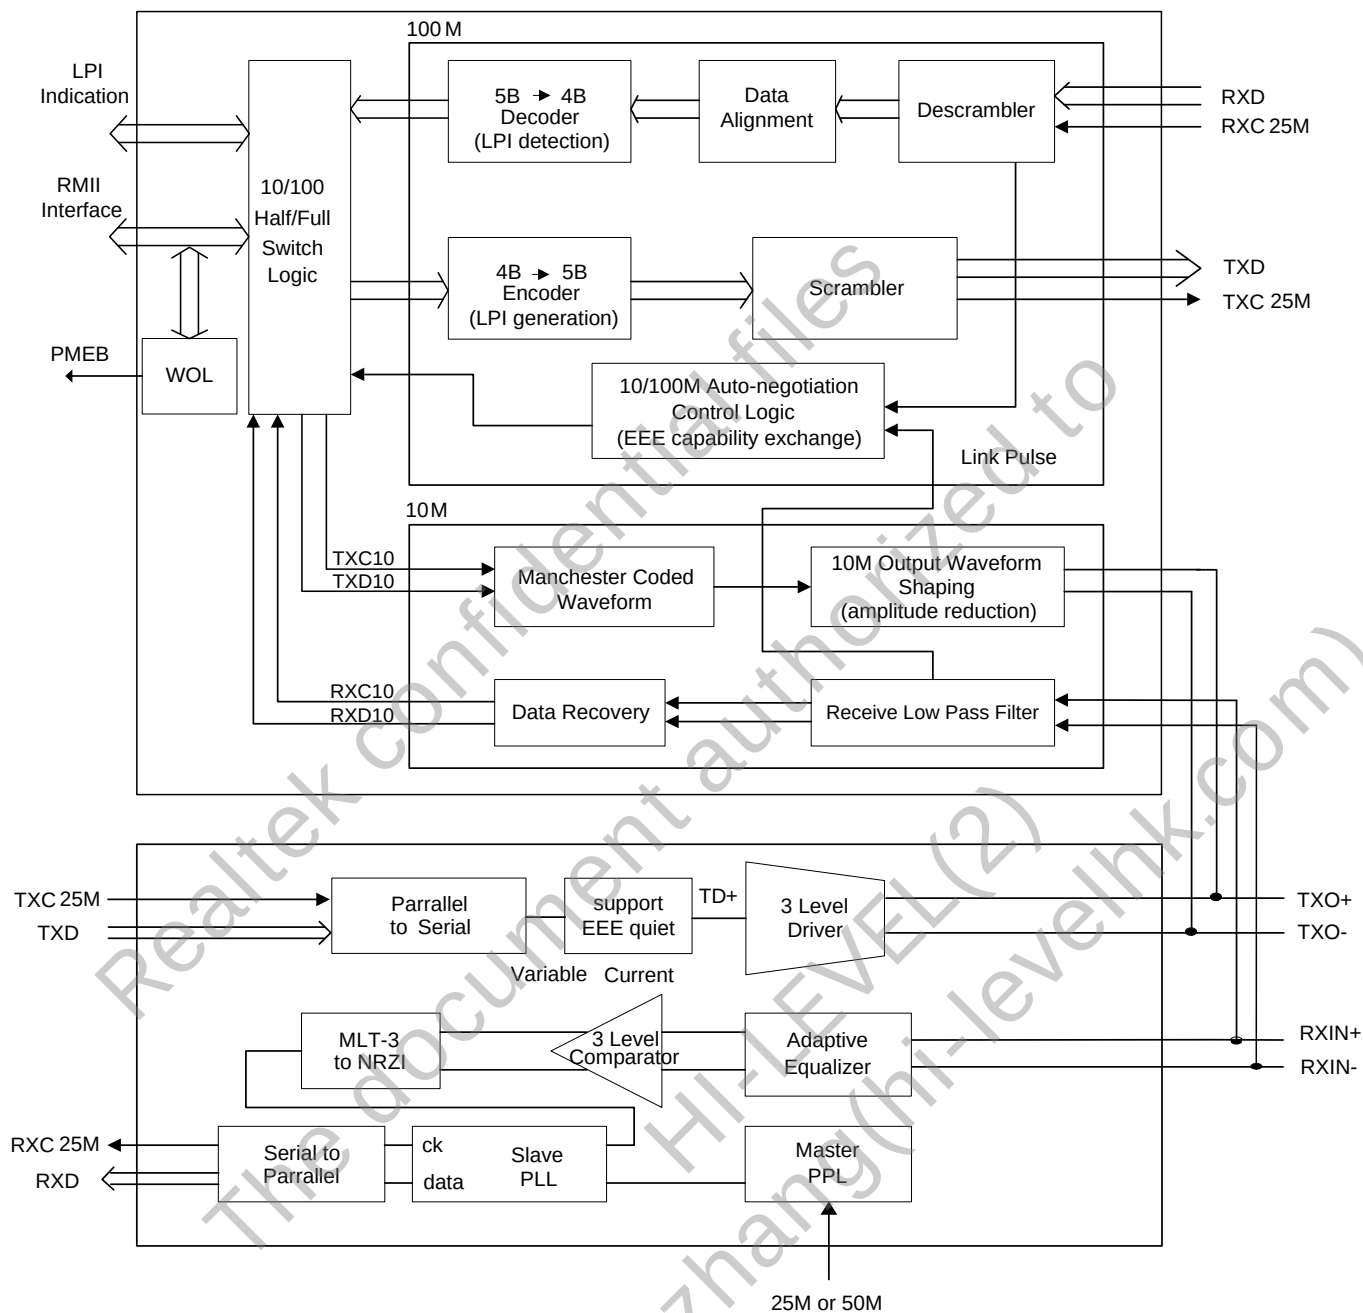


Figure 2. Block Diagram

5. Pin Assignments

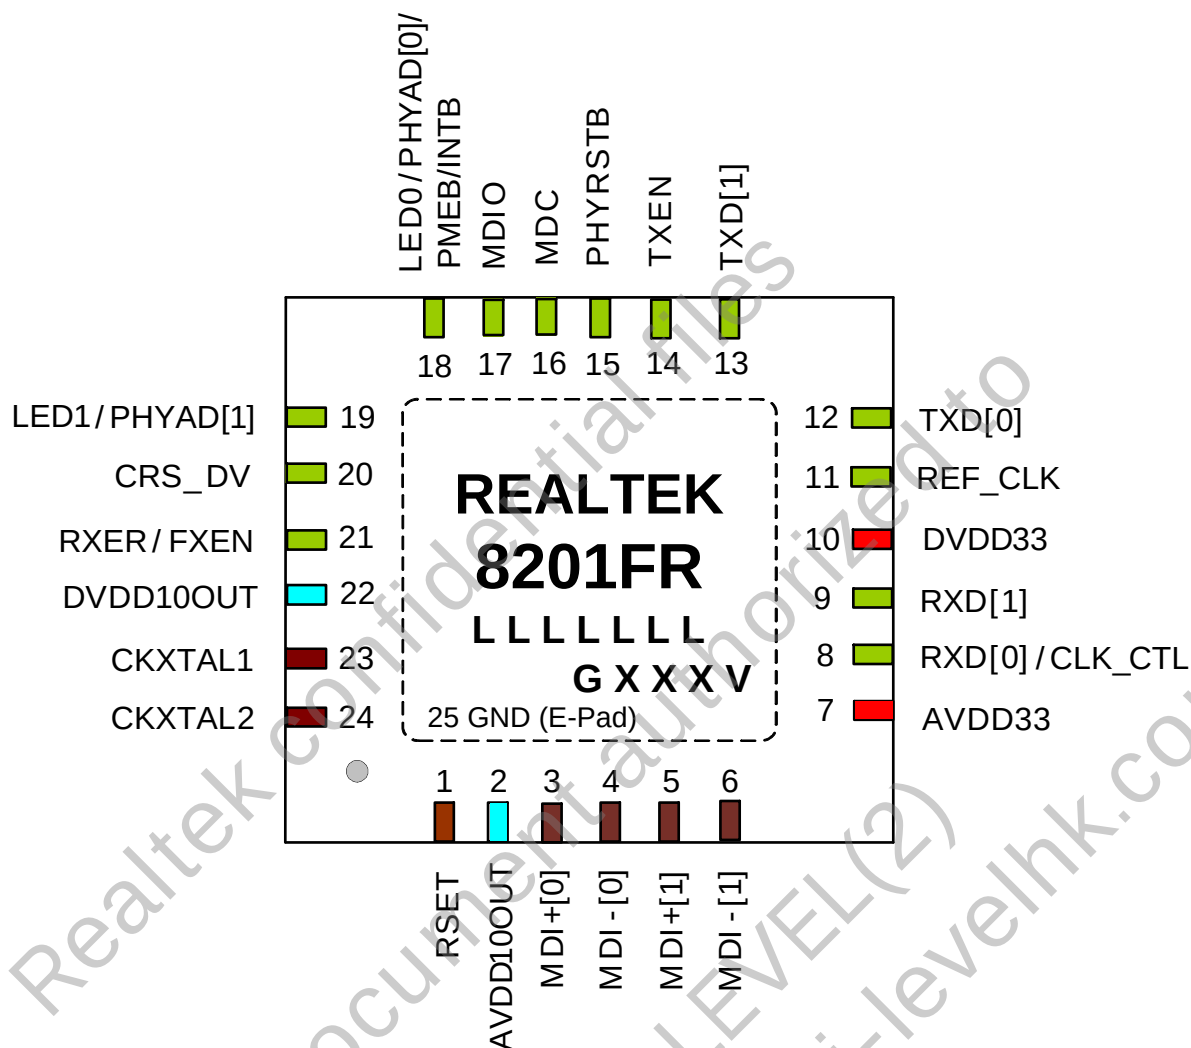


Figure 3. Pin Assignments

5.1. Green Package and Version Identification

Green package is indicated by the 'G' in GXXXV (Figure 3). The version is shown in the location marked 'V'.

6. Pin Descriptions

I: Input	LI: Latched Input during Power Up or Reset
O: Output	IO: Bi-Directional Input and Output
P: Power	HZ: High Impedance during Power On Reset
PU: Internal Pull Up during Power On Reset	PD: Internal Pull Down during Power On Reset

6.1. Serial Management Interface

Table 1. Serial Management Interface

Name	Type	Pin No.	Description
MDC	I/PU	16	Management Data Clock. This pin provides a clock synchronous to MDIO, which may be asynchronous to the transmit TXC and receive RXC clocks. The clock rate can be up to 2.5MHz. Use an internal weakly pulled high resistor to prevent the bus floating.
MDIO	IO/PU	17	Management Data Input/Output. This pin provides the bi-directional signal used to transfer management information.

6.2. RMII Interface

Table 2. RMII Interface

Name	Type	Pin No.	Description
REF_CLK	IO/PD	11	Synchronous 50MHz Clock Reference for Receive, Transmit, and Control Interface. The direction is decided by Page0 Register 25. The default direction is reference clock output mode.
CRS_DV	O/PD	20	Carrier Sense/Receive Data Valid. CRS_DV shall be asserted by the PHY when the receive medium is non-idle.
TXEN	I/PD	14	Transmit Enable.
TXD[0:1]	I/PD	12, 13	Transmit Data.
RXD[0]/CLK_CTL RXD[1]	O/PD LI/O/PD	8 9	Receive Data. RXD[0]/CLK_CTL pin is the Hardware strap in RMII Mode. 1: REF_CLK input mode 0: REF_CLK output mode An internal weakly pulled low resistor sets this to the default of REF_CLK output mode. It is possible to use an external 4.7K Ω pulled high resistor for REF_CLK input mode. An internal weakly pulled low resistor sets RXD[1] to the LED function (Pin18; default). Use an external 4.7K Ω pulled high resistor to enable the WOL or interrupt function (Table 29, page 21).

Name	Type	Pin No.	Description
RXER/FXEN	LI/O/PD	21	Receive Error. RXER is a required output of the PHY, but is an optional input for the MAC. This pin's status is latched at power on reset to determine the media mode to operate in. 1: Fiber mode 0: UTP mode An internal weakly pulled low resistor sets this to the default of UTP mode. It is possible to use an external 4.7KΩ pulled high resistor to enable fiber mode. After power on, the pin operates as the Receive Error pin.

6.3. Clock Interface

Table 3. Clock Interface

Name	Type	Pin No.	Description
CKXTAL2	O	24	25MHz Crystal Output. This pin provides the 25MHz crystal output. If an external 25MHz/50MHz oscillator or clock is used, connect CKXTAL2 to the oscillator or clock output (see section 9.4 Oscillator Requirements, page 46).
CKXTAL1	I	23	25MHz Crystal Input. This pin provides the 25MHz crystal input. Must be shorted to GND when an external 25MHz/50MHz oscillator or clock drives CKXTAL2.

6.4. 10/100Mbps Network Interface

Table 4. 10/100Mbps Network Interface

Name	Type	Pin No.	Description
MDI+[0] MDI-[0]	IO	3 4	Transmit Output. Differential transmit output pair shared by 100Base-TX, 100Base-FX, and 10Base-T modes. When configured as 100Base-TX, output is an MLT-3 encoded waveform. When configured as 100Base-FX, the output is pseudo-ECL level.
MDI+[1] MDI-[1]	IO	5 6	Receive Input. Differential receive input pair shared by 100Base-TX, 100Base-FX, and 10Base-T modes.

6.5. Transmit Bias Reference

Table 5. Transmit Bias Reference

Name	Type	Pin No.	Description
RSET	I	1	Transmit Bias Resistor Connection. This pin should be pulled to GND by a 2.49KΩ (1%) resistor to define driving current for the transmit DAC. The resistance value may be changed, depending on experimental results of the RTL8201FR-VB.

6.6. Device Configuration Interface

Table 6. Device Configuration Interface

Name	Type	Pin No.	Description																									
LED0/PHYAD[0]/PMEB/INTB	LI/O/PU	18	PHY Address and Customized LED Settings. The PHY address can be 00000~00011. <i>Note: The PHY will respond with PHY_AD=00 regardless of whether PHYAD[1:0] settings are non-zero.</i>																									
LED1/PHYAD[1]	LI/O/PD	19	Traditional LED Function Selection <table><tr><th>LED_Sel</th><th>00</th><th>01</th><th>10</th><th>11</th></tr><tr><td>LED0</td><td>ACT_{ALL}</td><td>Link_{ALL}/ACT_{ALL}</td><td>Link₁₀/ACT_{ALL}</td><td>LINK₁₀/ACT₁₀</td></tr><tr><td>LED1</td><td>LINK₁₀₀</td><td>LINK₁₀₀</td><td>LINK₁₀₀</td><td>LINK₁₀₀/ACT₁₀₀</td></tr></table> <i>Note 1: For customized LED settings, see section 7.17, page 19.</i> <i>Note 2: LED_Sel default is 11. Refer to section 7.19, page 20.</i> An internal weakly pulled low resistor sets RXD[1] to the LED function (Pin18; default). Use an external 4.7KΩ pulled high resistor to enable the WOL or interrupt function. Refer to section 7.21, page 21 for detail registers. Traditional LED Function Selection (Pin18 is used by WOL/INT) With the WOL or interrupt function enabled, the PHY address must be 00001 or 00011. <table><tr><th>LED_Sel</th><th>00</th><th>01</th><th>10</th><th>11</th></tr><tr><td>LED1</td><td>LINK₁₀₀</td><td>LINK₁₀₀</td><td>LINK₁₀₀</td><td>LINK₁₀₀/ACT₁₀₀</td></tr></table>	LED_Sel	00	01	10	11	LED0	ACT _{ALL}	Link _{ALL} /ACT _{ALL}	Link ₁₀ /ACT _{ALL}	LINK ₁₀ /ACT ₁₀	LED1	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀ /ACT ₁₀₀	LED_Sel	00	01	10	11	LED1	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀ /ACT ₁₀₀
LED_Sel	00	01	10	11																								
LED0	ACT _{ALL}	Link _{ALL} /ACT _{ALL}	Link ₁₀ /ACT _{ALL}	LINK ₁₀ /ACT ₁₀																								
LED1	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀ /ACT ₁₀₀																								
LED_Sel	00	01	10	11																								
LED1	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀ /ACT ₁₀₀																								
RXD[0]/CLK_CTL	O/PD	8	Receive Data. This pin is the Hardware strap in RMII Mode. 1: REF_CLK input mode 0: REF_CLK output mode An internal weakly pulled low resistor sets this to the default of REF_CLK output mode. It is possible to use an external 4.7KΩ pulled high resistor for REF_CLK input mode.																									
RXD[1]	LI/O/PD	9	An internal weakly pulled low resistor sets RXD[1] to the LED function (Pin18; default). Use an external 4.7KΩ pulled high resistor to enable the WOL or interrupt function. Set Page7 Register 23 Bit10 to 1 for interrupt function, 0 for Wake-On-LAN function (Table 29, page 21).																									
RXER/FXEN	LI/O/PD	21	Fiber/UTP Interface. This pin's status is latched at power on reset to determine the media mode to operate in. 1: Fiber mode 0: UTP mode An internal weakly pulled low resistor sets this to the default of UTP mode. It is possible to use an external 4.7KΩ pulled high resistor to enable fiber mode. After power on, the pin operates as the Receive Error pin.																									

6.7. Power, Ground, and Reset Pins

Table 7. Power, Ground, and Reset Pins

Name	Type	Pin No.	Description
AVDD33	P	7	3.3V Analog Power Input. 3.3V power supply for analog circuit; should be well decoupled.
DVDD33	P	10	3.3V Digital Power Input. 3.3V power supply for digital circuit.
AVDD10OUT	O	2	Power Output. Be sure to connect a 0.1μF ceramic capacitor for decoupling purposes. The connection method is outlined in 8.8 3.3V Power Supply and Voltage Conversion Circuit, page 34.
DVDD10OUT	O	22	Power Output. Be sure to connect a 0.1μF ceramic capacitor for decoupling purposes. The connection method is outlined in 8.8 3.3V Power Supply and Voltage Conversion Circuit, page 34.
PHYRSTB	I/HZ	15	RESETB. Set low to reset the chip. For a complete reset, this pin must be asserted low for at least 10ms.
GND	G	E-PAD	E-PAD GND. Should be connected to a larger GND plane. Exposed Pad (E-Pad) is Analog and Digital Ground.

7. Register Descriptions

This section describes the functions and usage of the registers available in this file. In this section the following abbreviations are used.

RW: Read/Write

RW/EFUS: Read/Write/eFUSE Burnable

RO: Read Only

RW/LI: Read/Write/Latch In

RC: Read Clear

RW/SC: Read/Write/Self-Clearing

SC: Self-Clear

LH: Latched High

Note: RW/EFUS and RW/LI types will return to default values after a software reset (set Reg.0 Bit15 to 1).

7.1. Register 0 Basic Mode Control Register

Table 8. Register 0 Basic Mode Control Register

Address	Name	Description	Mode	Default
0:15	Reset	This bit sets the status and control registers of the PHY in the default state. This bit is self-clearing. 1: Software reset 0: Normal operation Register 0 and register 1 will return to default values after a software reset (set Bit15 to 1). This action may change the internal PHY state and the state of the physical link associated with the PHY.	RW/ SC	0
0:14	Loopback	This bit enables loopback of transmit data nibbles TXD3:0 to the receive data path. 1: Enable loopback 0: Normal operation	RW	0
0:13	Speed Selection	This bit sets the network speed. 1: 100Mbps 0: 10Mbps After completing auto negotiation, this bit will reflect the speed status. 1: 100Base-T 0: 10Base-T When 100Base-FX mode is enabled, this bit=1 and is read only.	RW	1
0:12	Auto Negotiation Enable	This bit enables/disables the NWay auto-negotiation function. 1: Enable auto-negotiation; bits 0:13 and 0:8 will be ignored 0: Disable auto-negotiation; bits 0:13 and 0:8 will determine the link speed and the data transfer mode, respectively When 100Base-FX mode is enabled, this bit=0 and is read only.	RW	1



Single-Chip/Port 10/100M Ethernet PHYceiver with Auto MDIX

11

Track ID: JATR-8275-15 Rev. 1.9

7.2. Register 1 Basic Mode Status Register

Table 9. Register 1 Basic Mode Status Register

Address	Name	Description	Mode	Default
1:15	100Base-T4	1: Enable 100Base-T4 support 0: Suppress 100Base-T4 support	RO	0
1:14	100Base_TX_FD	1: Enable 100Base-TX full duplex support 0: Suppress 100Base-TX full duplex support	RO	1
1:13	100Base_TX_HD	1: Enable 100Base-TX half duplex support 0: Suppress 100Base-TX half duplex support	RO	1
1:12	10Base_T_FD	1: Enable 10Base-T full duplex support 0: Suppress 10Base-T full duplex support	RO	1
1:11	10Base_T_HD	1: Enable 10Base-T half duplex support 0: Suppress 10Base-T half duplex support	RO	1
1:10~7	Reserved	Reserved.	-	-
1:6	MF Preamble Suppression	The RTL8201FR-VB will Accept Management Frames with Preamble Suppressed. A minimum of 32 preamble bits are required for the first management interface read/write transaction after reset. One idle bit is required between any two management transactions as per IEEE 802.3u specifications.	RO	1
1:5	Auto Negotiation Complete	1: Auto-negotiation process completed 0: Auto-negotiation process not completed	RO	0
1:4	Remote Fault	1: Remote fault condition detected (cleared on read) 0: No remote fault condition detected When in 100Base-FX mode, this bit means an in-band signal Far-End-Fault has been detected (see 8.10 Far End Fault Indication, page 35).	RC	0
1:3	Auto-Negotiation Ability	1: PHY is able to perform auto-negotiation 0: PHY is not able to perform auto-negotiation	RO	1
1:2	Link Status	1: Valid link established 0: No valid link established This bit indicates whether the link was lost since the last read. For the current link status, read this register twice.	RO	0
1:1	Jabber Detect	1: Jabber condition detected 0: No jabber condition detected	RO	0
1:0	Extended Capability	1: Extended register capable (permanently=1) 0: Not extended register capable	RO	1

7.3. Register 2 PHY Identifier Register 1

Table 10. Register 2 PHY Identifier Register 1

Address	Name	Description	Mode	Default
2:15~0	OUI	Composed of the 6 th to 21 st bits of the Organizationally Unique Identifier (OUI), respectively.	RO	001Ch

7.4. Register 3 PHY Identifier Register 2

Table 11. Register 3 PHY Identifier Register 2

Address	Name	Description	Mode	Default
3:15~10	OUI_LSB	Assigned to the 0 through 5 th Bits of the OUI.	RO	110010
3:9~4	Model Number	Model Number.	RO	000001
3:3~0	Revision Number	Revision Number.	RO	0110

7.5. Register 4 Auto-Negotiation Advertisement Register (ANAR)

This register contains the advertised abilities of this device as they will be transmitted to its link partner during auto-negotiation.

Table 12. Register 4 Auto-Negotiation Advertisement Register (ANAR)

Address	Name	Description	Mode	Default
4:15	Next Page	Next Page Bit. 0: Transmitting the primary capability data page 1: Transmitting the protocol specific data page	RW	0
4:14	Acknowledge	1: Acknowledge reception of link partner capability data word 0: Do not acknowledge reception	RO	0
4:13	Remote Fault	1: Advertise remote fault detection capability 0: Do not advertise remote fault detection capability	RW	0
4:12	Reserved	Reserved.	-	-
4:11	Asymmetric PAUSE	1: Advertise asymmetric pause support 0: No support of asymmetric pause	RW	0
4:10	Pause	Reserved.	RW	0
4:9	100Base-T4	1: 100Base-T4 is supported by local node 0: 100Base-T4 not supported by local node	RO	0
4:8	100Base-TX-FD	1: 100Base-TX full duplex is supported by local node 0: 100Base-TX full duplex not supported by local node	RW	1
4:7	100Base-TX	1: 100Base-TX is supported by local node 0: 100Base-TX not supported by local node	RW	1
4:6	10Base-T-FD	1: 10Base-T full duplex supported by local node 0: 10Base-T full duplex not supported by local node	RW	1
4:5	10Base-T	1: 10Base-T is supported by local node 0: 10Base-T not supported by local node	RW	1
4:4~0	Selector Field	Binary Encoded Selector Supported by This Node. Currently only CSMA/CD 00001 is specified. No other protocols are supported.	RO	00001

7.6. Register 5 Auto-Negotiation Link Partner Ability Register (ANLPAR)

This register contains the advertised abilities of the Link Partner as received during auto-negotiation. The content changes after a successful auto-negotiation if Next-pages are supported.

Table 13. Register 5 Auto-Negotiation Link Partner Ability Register (ANLPAR)

Address	Name	Description	Mode	Default
5:15	Next Page	Next Page Bit. 0: Transmitting the primary capability data page 1: Transmitting the protocol specific data page	RO	0
5:14	Acknowledge	1: Link partner acknowledges reception of local node's capability data word 0: No acknowledgement	RO	0
5:13	Remote Fault	1: Link partner is indicating a remote fault 0: Link partner is not indicating a remote fault	RO	0
5:12	Reserved	Reserved.	-	-
5:11	Asymmetric PAUSE	1: Asymmetric Flow control supported by Link Partner 0: No Asymmetric flow control supported by Link Partner When auto-negotiation is enabled, this bit reflects Link Partner ability.	RO	0
5:10	Pause	1: Flow control supported by Link Partner 0: No flow control supported by Link Partner When auto-negotiation is enabled, this bit reflects Link Partner ability (read only).	RO	0
5:9	100Base-T4	1: 100Base-T4 is supported by link partner 0: 100Base-T4 not supported by link partner	RO	0
5:8	100Base-TX-FD	1: 100Base-TX full duplex is supported by link partner 0: 100Base-TX full duplex not supported by link partner	RO	0
5:7	100Base-TX	1: 100Base-TX is supported by link partner 0: 100Base-TX not supported by link partner This bit will also be set if the link in 100Base-TX is established by parallel detection.	RO	0
5:6	10Base-T-FD	1: 10Base-T full duplex is supported by link partner 0: 10Base-T full duplex not supported by link partner	RO	0
5:5	10Base-T	1: 10Base-T is supported by link partner 0: 10Base-T not supported by link partner This bit will also be set if the link in 10Base-T is established by parallel detection.	RO	0
5:4~0	Selector Field	Link Partner's Binary Encoded Node Selector. Currently only CSMA/CD 00001 is specified.	RO	00001

7.7. Register 6 Auto-Negotiation Expansion Register (ANER)

This register contains additional status for NWay auto-negotiation.

Table 14. Register 6 Auto-Negotiation Expansion Register (ANER)

Address	Name	Description	Mode	Default
6:15~5	Reserved	Reserved.	-	-
6:4	Parallel Detection Fault	1: A fault has been detected via the Parallel Detection function 0: No fault has been detected via the Parallel Detection function	RC	0
6:3	Link Partner Next Page Ability	1: Link Partner is Next Page able 0: Link Partner is not Next Page able	RO	0
6:2	Local Next Page Ability	1: Next Page is able 0: Not Next Page able	RO	0
6:1	Page Received	1: A New Page has been received 0: A New Page has not been received	RC	0
6:0	Link Partner Auto-Negotiation Ability	If Auto-Negotiation is Enabled, This Bit Means: 1: Link Partner is Auto-Negotiation able 0: Link Partner is not Auto-Negotiation able	RO	0

7.8. Page0 Register 13 MACR (MMD Access Control Register; Address 0x0D)

Table 15. Page0 Register 13 MACR (MMD Access Control Register; Address 0x0D)

Bit	Name	RW	Default	Description
13.15:14	Function	WO	0	00: Address 01: Data; no post increment 10: Data; post increment on reads and writes 11: Data; post increment on writes only
13.13:5	RSVD	RO	000000000	Reserved.
13.4:0	DEVAD	WO	0	Device Address.

Note 1: Used in conjunction with the MAADR (Register 14) to provide access to the MMD address space.

Note 2: If the access of MAADR is for address (Function=00) then it is directed to the address register within the MMD associated with the value in the DEVAD field.

Note 3: If the access of MAADR is for data (Function=01) then both the DEVAD field and the MMD address register direct the MAADR data accesses to the appropriate registers within the MMD.

7.9. Page0 Register 14 MAADR (MMD Access Address Data Register; Address 0x0E)

Table 16. Page0 Register 14 MAADR (MMD Access Address Data Register; Address 0x0E)

Bit	Name	RW	Default	Description
14.15:0	Address Data	RW	0x0000	13.15:14=00 → MMD DEVAD's address register 13.15:14=01, 10, or 11 → MMD DEVAD's data register as indicated by the contents of its address register

Note: Used in conjunction with the MACR (Register 13) to provide access to the MMD address space.

7.10. Register 24 Power Saving Mode Register (PSMR)

Table 17. Register 24 Power Saving Mode Register (PSMR)

Address	Name	Description	Mode	Default
24:15	Enpwrsave	Enable Power Saving Mode. The bit will return to default value by software reset.	RW	1
24:14~0	Reserved	Reserved.	-	-

Note: If the REF_CLK output is needed in RMII output mode, LDPS (Link Down Power Saving) must be disabled (see Table 41, page 32).

7.11. Register 28 Fiber Mode and Loopback Register

Table 18. Register 28 Fiber Mode and Loopback Register

Address	Name	Description	Mode	Default
28:15~6	Reserved	Reserved.	-	-
28:5	Fxmode	Enable Fiber Mode.	RW	0
28:4~3	Reserved	Reserved.	-	-
28:2	En_autoMDIX	Enable Auto MDIX Function.	RW	1
28:1	Force_MDI	Force MDI/MDIX Mode. If enable auto MDIX function is disabled: 1: Force MDI 0: Force MDIX	RW	1
28:0	Reserved	Reserved.	-	-

7.12. Register 30 Interrupt Indicators and SNR Display Register

Table 19. Register 30 Interrupt Indicators and SNR Display Register

Address	Name	Description	Mode	Default
30:15	Anerr	Auto-Negotiation Error Interrupt. 1: Enable 0: Disable	RC	0
30:14	Spdchg	Speed Mode Change Interrupt. 1: Enable 0: Disable	RC	0
30:13	Duplexchg	Duplex Mode Change Interrupt. 1: Enable 0: Disable	RC	0
30:12	Reserved	Reserved.	-	-
30:11	Linkstatuschg	Link Status Change Interrupt. 1: Enable 0: Disable	RC	0
30:10~4	Reserved	Reserved.	-	-
30:3~0	SNR_O	These 4-Bits Show the Signal to Noise Ratio Value.	RO	0000

7.13. Register 31 Page Select Register

Table 20. Register 31 Page Select Register

Address	Name	Description	Mode	Default
31:15~8	Reserved	Reserved for Internal Testing.	-	-
31:7~0	PAGE_SEL	Select Page Address: 00000000~11111111.	RW	00000000

7.14. Page4 Register 16 EEE Capability Enable Register

Table 21. Page4 Register 16 EEE Capability Enable Register

Address	Name	Description	Mode	Default
16:15~14	Reserved	Reserved.	-	-
16:13	EEE_10_cap	Enable EEE 10M Capability.	RW	1
16:12	EEE_nway_en	Enable Next Page Exchange in NWay for EEE 100M.	RW/ EFUS	1
16:11~10	Reserved	Reserved.	-	-
16:9	Tx_quiet_en	Enable Ability to Turn Off Power 100TX when TX in Quiet State. This bit is recommended to be set to 1 when EEE is enabled.	RW/ EFUS	1
16:8	Rx_quiet_en	Enable Ability to Turn Off Power 100RX when RX in Quiet state. This bit is recommended to be set to 1 when EEE is enabled.	RW/ EFUS	1
16:7:0	Reserved	Reserved.	-	-

7.15. Page4 Register 21 EEE Capability Register

Table 22. Page4 Register 21 EEE Capability Register

Address	Name	Description	Mode	Default
21:15~13	Reserved	Reserved.	-	-
21:12	Rg_dis_ldvt	Set 1 to Disable the Line Driver of the Analog Circuit.	RW	0
21:11~1	Reserved	Reserved.	-	-
21:0	EEE_100_cap	NWay Result to Indicate Link Partner Supports EEE 100M.	RO	0

7.16. Page7 Register 16 RMII Mode Setting Register (RMSR)

Table 23. Page7 Register 16 RMII Mode Setting Register (RMSR)

Address	Name	Description	Mode	Default
16:15~13	Reserved	Reserved.	-	-
16:12	Rg_rmii_clkdir	This Bit Sets the Type of TXC in RMII Mode. 0: Output 1: Input	RW/LI	0
16:11~8	Rg_rmii_tx_offset	Adjust RMII TX Interface Timing.	RW/EFUS	1111
16:7~4	Rg_rmii_rx_offset	Adjust RMII RX Interface Timing.	RW/EFUS	1111
16:3	RMII Mode	1: RMII Mode (Must be kept to 1)	RW/EFUS	1
16:2	Rg_rmii_rxdv_sel	0: CRS_DV pin is CRS_DV signal 1: CRS_DV pin is RXDV signal	RW/EFUS	0
16:1	Rg_rmii_rxdsel	0: RMII data only 1: RMII data with SSD error	RW/EFUS	1
16:0	Reserved	Reserved.	-	-

7.17. Page7 Register 17 Customized LEDs Setting Register

This register is for setting customized LEDs. Table 24 shows the customized LED matrix table.

Table 24. Customized LED Matrix Table

	LINK		ACT
	10M	100M	
LED0	Bit0	Bit1	Bit3
LED1	Bit4	Bit5	Bit7

LED Pin	ACT=0	ACT=1
LINK=0	Floating	All Speed ACT
LINK>0	Selected Speed LINK	Selected Speed LINK+ACT

Table 25. Page7 Register 17 Customized LEDs Setting Register

Address	Name	Description	Mode	Default
17:15~8	Reserved	Reserved.	-	-
17:7~4	LED_sel1	Customized LED1 Setting. Set Bit3 (Page7 Register 19; Table 27, page 20) to 1 to enable customized LED function.	RW/ EFUS	0000
17:3~0	LED_sel0	Customized LED0 Setting. Set Bit3 (Page7 Register 19; Table 27, page 20) to 1 to enable customized LED function.	RW/ EFUS	0000

7.18. Page7 Register 18 EEE LEDs Enable Register

Table 26. Page7 Register 18 EEE LEDs Enable Register

Address	Name	Description	Mode	Default
18:15~2	Reserved	Reserved.	-	-
18:1	EEE_LED_en1	Enable LED1 in EEE/LPI Mode.	RW	0
18:0	EEE_LED_en0	Enable LED0 in EEE/LPI Mode.	RW	0

7.19. Page7 Register 19 Interrupt and LEDs Function Registers

Table 27. Page7 Register 19 Interrupt and LEDs Function Registers

Address	Name	Description	Mode	Default															
19:15~14	Reserved	Reserved.	-	-															
19:13	Int_linkchg	Link Change Interrupt Mask. 1: Interrupt pin Enable 0: Interrupt pin Disable This bit set to 0 only masks the link change interrupt event in the INTB pin. Reg30 Bit11 always reflects the link change interrupt behavior (see Table 19, page 17). Set Page7 Register 23 Bit10 to 1 to enable the interrupt function (Table 29, page 21).	RW	0															
19:12	Int_dupchg	Duplex Change Interrupt Mask. 1: Interrupt pin Enable 0: Interrupt pin Disable This bit set to 0 only masks the duplex change interrupt event in the INTB pin. Reg30 Bit13 always reflects the duplex change interrupt behavior (see Table 19, page 17). Set Page7 Register 23 Bit10 to 1 to enable the interrupt function (Table 29, page 21).	RW	0															
19:11	Int_anerr	NWay Error Interrupt Mask. 1: Interrupt pin Enable 0: Interrupt pin Disable This bit set to 0 only masks the NWay Error interrupt event in the INTB pin. Reg30 Bit15 always reflects the NWay Error interrupt behavior (see Table 19, page 17). Set Page7 Register 23 Bit10 to 1 to enable the interrupt function (Table 29, page 21).	RW	0															
19:10	Rg_led0_wol_sel	Pin18 Function Selection. 1: Wake-On-LAN/Interrupt Function Enable Set Page7 Register 23 Bit10 to 1 for interrupt function; 0 for Wake-On-LAN function (Table 29, page 21). 0: LED Function Enable An internal weakly pulled low resistor sets RXD[1] to the LED function (default). Use an external 4.7KΩ pulled high resistor to enable the WOL or interrupt function.	RW/LI	0															
19:9~6	Reserved	Reserved.	-	-															
19:5~4	LED_sel[1:0]	Traditional LED Function Selection. <table border="1"> <thead> <tr> <th>LED_sel</th><th>00</th><th>01</th><th>10</th><th>11</th></tr> </thead> <tbody> <tr> <td>LED0</td><td>ACT_{ALL}</td><td>Link_{ALL}/ ACT_{ALL}</td><td>Link₁₀/ ACT_{ALL}</td><td>LINK₁₀/ ACT₁₀</td></tr> <tr> <td>LED1</td><td>LINK₁₀₀</td><td>LINK₁₀₀</td><td>LINK₁₀₀</td><td>LINK₁₀₀/ ACT₁₀₀</td></tr> </tbody> </table>	LED_sel	00	01	10	11	LED0	ACT _{ALL}	Link _{ALL} / ACT _{ALL}	Link ₁₀ / ACT _{ALL}	LINK ₁₀ / ACT ₁₀	LED1	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀ / ACT ₁₀₀	RW/ EFUS	11
LED_sel	00	01	10	11															
LED0	ACT _{ALL}	Link _{ALL} / ACT _{ALL}	Link ₁₀ / ACT _{ALL}	LINK ₁₀ / ACT ₁₀															
LED1	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀	LINK ₁₀₀ / ACT ₁₀₀															
19:3	Customized_LED	Customized LED Enable. 1: Customized LED function enable 0: Customized LED function disable See the section 8.4.7 Customized LED, page 31 for detail.	RW/ EFUS	0															
19:2~1	Reserved	Reserved.	-	-															
19:0	En10mlpi	Enable 10M LPI LED Function.	RW	0															

7.20. Page7 Register 20 RMII TX Isolate Register

Table 28. Page7 Register 20 RMII TX Isolate Register

Address	Name	Description	Mode	Default
20:15	Rg_tx_isolate_en	Isolate RMII TX Path Signals when TX Idle.	RW	0
20:14~0	Reserved	Reserved.	-	-

7.21. Page7 Register 23 Wake-On-LAN and Interrupt Function Control Registers

Table 29. Page7 Register 23 Wake-On-LAN and Interrupt Function Control Registers

Address	Name	Description	Mode	Default
23:15~11	Reserved	Reserved.	-	-
23:10	Rg_wol_int_sel	Wake-On-LAN and Interrupt Function Selection. 0: Wake-On-LAN function 1: Interrupt function <i>Note: RXD[1] must be pulled high via a 4.7KΩ resistor.</i>	RW	0
23:9:0	Reserved	Reserved.	-	-

7.22. Page7 Register 24 Spread Spectrum Clock Register

Table 30. Page7 Register 24 Spread Spectrum Clock Register

Address	Name	Description	Mode	Default
24:15~1	Reserved	Reserved.	-	-
24:0	Rg_dis_ssc	0: SSC function is enabled 1: SSC function is disabled	RW	0

7.23. MMD Register Mapping and Definition

Note: MMD registers are placed at Page0 Register 13 and Register 14.

Table 31. MMD Register Mapping and Definition

Device	Offset	Access	Name	Description
3	0	RW	EEEPC1R	EEE PCS Control 1 Register
3	1	RO/ RO, LH	EEEPS1R	EEE PCS Status Control 1 Register
3	20	RO	EEECR	EEE Capability Register
3	22	RC	EEEWER	EEE Wake Error Register
7	60	RW	EEEAR	EEE Advertisement Register
7	61	RO	EEELPAR	EEE Link Partner Ability Register

7.23.1. EEEPC1R (PCS Control 1 Register, MMD Device 3, Address 0x00)

Table 32. EEEPC1R (PCS Control 1 Register, MMD Device 3, Address 0x00)

Bit	Name	RW	Default	Description
3.0.15:11	RSVD	RW	0	Reserved.
3.0.10	Clock Stop Enable	RW	0	1: PHY stops RXC in LPI 0: RXC not stoppable
3.0.9:0	RSVD	RW	0	Reserved.

7.23.2. EEEPS1R (PCS Status 1 Register, MMD Device 3, Address 0x01)

Table 33. EEEPS1R (PCS Status 1 Register, MMD Device 3, Address 0x01)

Bit	Name	RW	Default	Description
3.1.15:12	RSVD	RO	0	Reserved.
3.1.11	TX LPI Received	RO, LH	0	1: TX PCS has received LPI 0: LPI not received
3.1.10	RX LPI Received	RO, LH	0	1: RX PCS has received LPI 0: LPI not received
3.1.9	TX LPI Indication	RO	0	1: TX PCS is currently receiving LPI 0: TX PCS is not currently receiving LPI
3.1.8	RX LPI Indication	RO	0	1: RX PCS is currently receiving LPI 0: RX PCS is not currently receiving LPI
3.1.7	RSVD	RO	0	Reserved.
3.1.6	Clock Stop Capable	RO	1	1: MAC stops TXC in LPI 0: TXC not stoppable
3.1.5:0	RSVD	RO	0	Reserved.

7.23.3. EEECR (EEE Capability Register, MMD Device 3; Address 0x14)

Table 34. EEECR (EEE Capability Register, MMD Device 3; Address 0x14)

Bit	Name	RW	Default	Description
3.20.15:2	RSVD	RO	0	Reserved.
3.20.1	100Base-TX EEE	RO	1	1: EEE is supported for 100Base-TX EEE 0: EEE is not supported for 100Base-TX EEE
3.20.0	RSVD	RO	1	Reserved.

7.23.4. EEEWER (EEE Wake Error Register, MMD Device 3; Address 0x16)

Table 35. EEEWER (EEE Wake Error Register, MMD Device 3; Address 0x16)

Bit	Name	RW	Default	Description
3.22.15:0	EEE Wake Error Counter	RC	0	Used by PHY types that support EEE to count wake time faults where the PHY fails to complete its normal wake sequence within the time required for the specific PHY type.

7.23.5. EEEAR (EEE Advertisement Register, MMD Device 7; Address 0x3c)

Table 36. EEEAR (EEE Advertisement Register, MMD Device 7; Address 0x3c)

Bit	Name	RW	Default	Description
7.60.15:3	RSVD	RW	0	Reserved.
7.60.1	100Base-TX EEE	RW	1	Advertise 100Base-TX EEE Capability. 1: Advertise 0: Do not advertise
7.60.0	RSVD	RW	0	Reserved.

7.23.6. EEELPAR (EEE Link Partner Ability Register, MMD Device 7; Address 0x3d)

Table 37. EEELPAR (EEE Link Partner Ability Register, MMD Device 7; Address 0x3d)

Bit	Name	RW	Default	Description
7.61.15:3	RSVD	RO	0	Reserved.
7.61.1	LP 100Base-TX EEE	RO	0	1: Link Partner is capable of 100Base-TX EEE 0: Link Partner is not capable of 100Base-TX EEE
7.61.0	RSVD	RO	0	Reserved.

8. Functional Description

The RTL8201FR-VB PHYceiver is a physical layer device that integrates 10Base-T and 100Base-TX/100Base-FX functions, and some extra power management features. This device supports the following functions:

- RMIi interface with MDC/MDIO management interface to communicate with the MAC
- IEEE 802.3u clause 28 Auto-Negotiation ability
- Speed, duplex, auto-negotiation ability configurable by hard wire or MDC/MDIO
- Power Down mode support
- 4B/5B transform
- Scrambling/De-scrambling
- NRZ to NRZI, NRZI to MLT-3
- Manchester Encode and Decode for 10Base-T operation
- Clock and Data recovery
- Adaptive Equalization
- Automatic Polarity Correction
- Far End Fault Indication (FEFI) in fiber mode
- Network status LEDs
- Energy Efficient Ethernet (EEE)
- Spread Spectrum Clock (SSC) for RMIi REF_CLK output mode

8.1. Management Interface

The MAC layer device can use the MDC/MDIO management interface to control a maximum of 4 devices, configured with different PHY addresses (00b to 11b). Frames transmitted on the MDC/MDIO Management Interface should have the frame structure shown in Table 38.

Table 38. Management Frame Format

	Management Frame Fields							
	Preamble	ST	OP	PHYAD	REGAD	TA	DATA	IDLE
Read	1...1	01	10	AAAAA	RRRRR	Z0	DDDDDDDDDDDDDDDDDD	Z
Write	1...1	01	01	AAAAA	RRRRR	10	DDDDDDDDDDDDDDDDDD	Z

During a hardware reset, the logic levels of pins 18 and 19 are latched to be set as the PHY address for management communication via the serial interface. The read and write frame structure for the management interface is illustrated in Figure 4 and Figure 5.

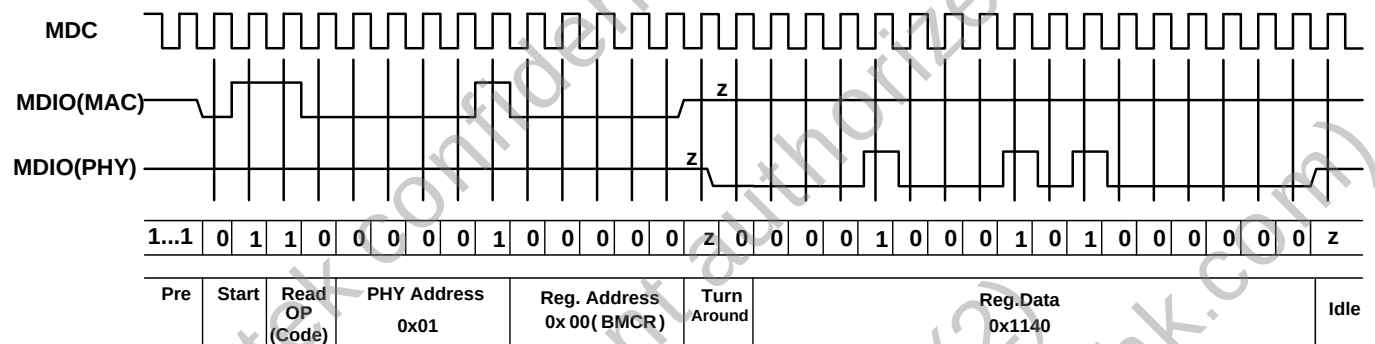


Figure 4. Read Cycle

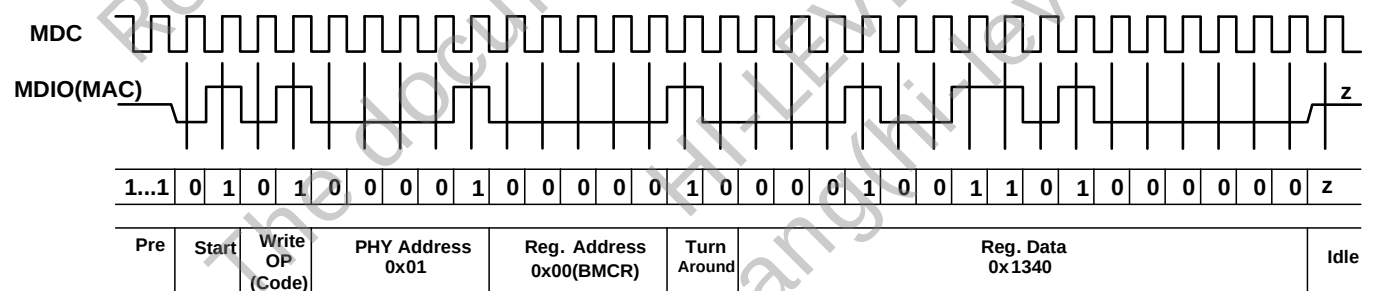


Figure 5. Write Cycle

Table 39. Serial Management

Name	Description
Preamble	32 Contiguous Logical 1's Sent by the MAC on MDIO, along with 32 Corresponding Cycles on MDC. This provides synchronization for the PHY.
ST	Start of Frame. Indicated by a 01 pattern.
OP	Operation Code. Read: 10 Write: 01
PHYAD	PHY Address. Up to 4 PHYs can be connected to one MAC. This 2-bit field selects which PHY the frame is directed to.
REGAD	Register Address. This is a 5-bit field that sets which of the 32 registers of the PHY this operation refers to.
TA	Turnaround. This is a 2-bit-time spacing between the register address and the data field of a frame to avoid contention during a read transaction. For a read transaction, both the STA and the PHY remain in a high-impedance state for the first bit time of the turnaround. The PHY drives a zero bit during the second bit time of the turnaround of a read transaction.
DATA	Data. These are the 16 bits of data.
IDLE	Idle Condition. Not truly part of the management frame. This is a high impedance state. Electrically, the PHY's pull-up resistor will pull the MDIO line to a logical '1'.

8.2. Interrupt

Whenever there is a status change on the media detected by the RTL8201FR-VB, it will drive the interrupt pin (INTB) low to issue an interrupt event. The MAC senses the status change and accesses the registers page0 register30 through the MDC/MDIO interface in response.

Once these status registers page0 register30 have been read by the MAC through the MDC/MDIO, the INTB is de-asserted. The RTL8201FR-VB interrupt function removes the need for continuous polling through the MDC/MDIO management interface.

Note 1: The Interrupt function is disabled by default. To enable this function, refer to Table 27, page 20 (Page7 Register 19 Bit[13:11]).

Note 2: RXD[1] must be pulled high via a 4.7K Ω resistor. To enable this function, Page7 Register23, Bit10 must set to 1 (Table 29, page 21).

8.3. Auto-Negotiation and Parallel Detection

The RTL8201FR-VB supports IEEE 802.3u clause 28 Auto-negotiation for operation with other transceivers supporting auto-negotiation. The RTL8201FR-VB can auto-detect the link partner's abilities and determine the highest speed/duplex configuration possible between the two devices. If the link partner does not support auto-negotiation, then the RTL8201FR-VB will enable half-duplex mode and enter parallel detection mode. The RTL8201FR-VB will default to transmitting FLP (Fast Link Pulse) and wait for the link partner to respond. If the RTL8201FR-VB receives a FLP, then the auto-negotiation process will continue. If it receives an NLP (Normal Link Pulse), then the RTL8201FR-VB will change to 10Mbps and half-duplex mode. If it receives a 100Mbps IDLE pattern, it will change to 100Mbps and half-duplex mode.

8.3.1. Setting the Medium Type to MAC

Table 40. Setting the Medium Type to MAC

FXEN	Operation Mode
H	Fiber Mode and RMII Mode
L	UTP Mode and RMII Mode

8.4. LED Functions

The RTL8201FR-VB supports two LED signals in four configurable operation modes. The following sections describe the various LED actions.

8.4.1. LED and PHY Address

As the PHYAD strap options share the LED output pins, the external combinations required for strapping and LED usage must be considered in order to avoid contention. Specifically, when the LED outputs are used to drive LEDs directly, the active state of each output driver is dependent on the logic level sampled by the corresponding PHYAD input upon power-up/reset. For example, as Figure 6, page 28 (left-side) shows, if a given PHYAD input is resistively pulled high then the corresponding output will be configured as an active low driver. On the right side, we can see that if a given PHYAD input is resistively pulled low then the corresponding output will be configured as an active high driver. The PHY address configuration pins should not be connected to GND or VCC directly, but must be pulled high or low through a resistor (e.g., 4.7K Ω). If no LED indications are needed, the components of the LED path (LED+510 Ω) can be removed.

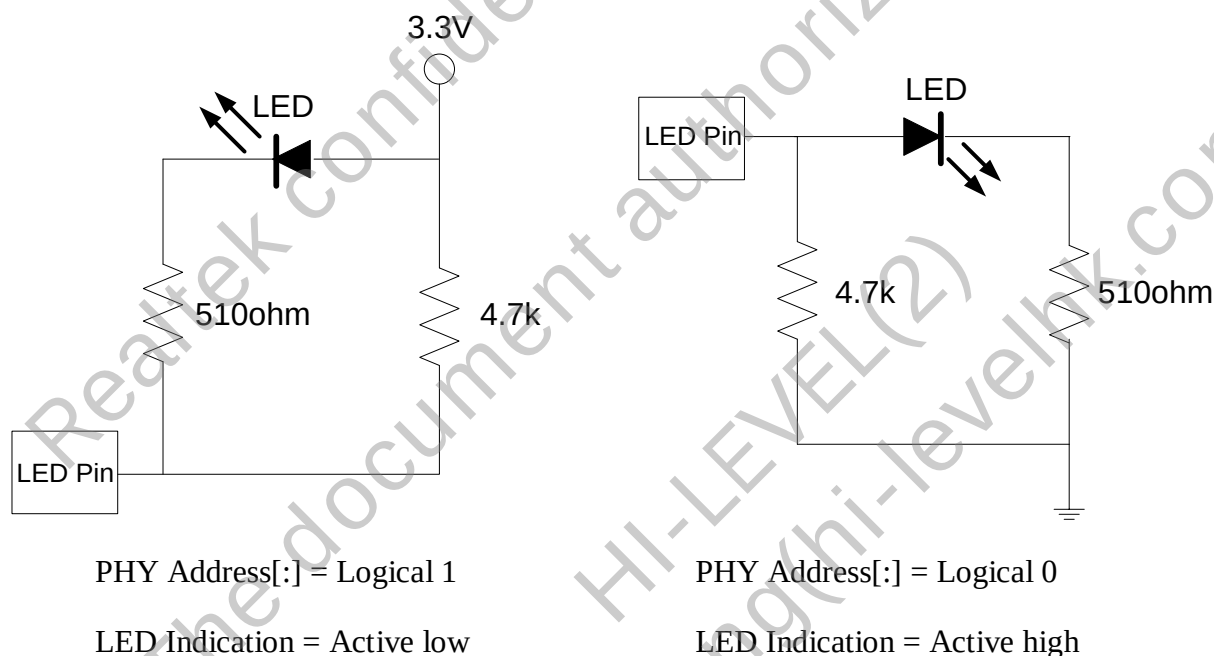


Figure 6. LED and PHY Address Configuration

8.4.2. Link Monitor

The Link Monitor senses link integrity, such as LINK₁₀, LINK₁₀₀, LINK₁₀/ACT, or LINK₁₀₀/ACT. Whenever link status is established, the specific link LED pin is driven low. Once a cable is disconnected, the link LED pin is driven high, indicating that no network connection exists.

8.4.3. RX LED

In 10/100M mode, blinking of the RX LED indicates that receive activity is occurring.

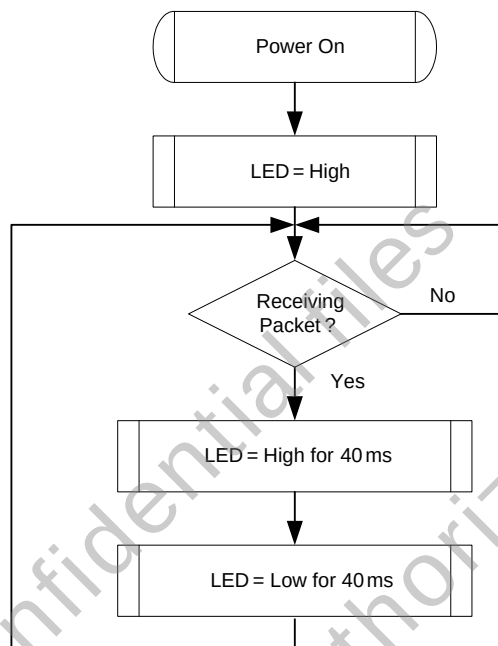


Figure 7. RX LED

8.4.4. TX LED

In 10/100M mode, blinking of the TX LED indicates that transmit activity is occurring.

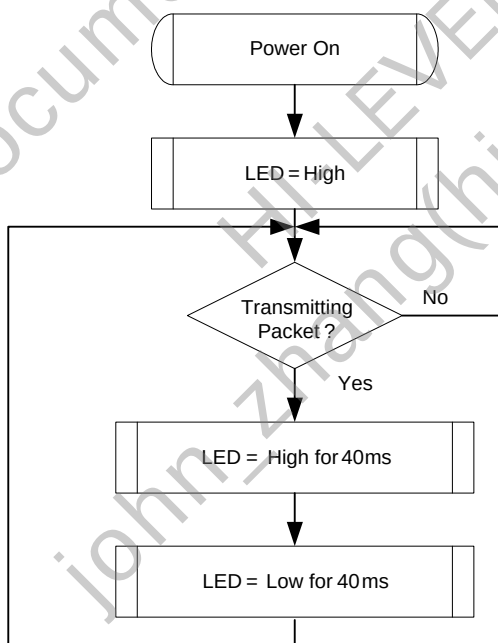


Figure 8. TX LED

8.4.5. TX/RX LED

In 10/100M mode, blinking of the TX/RX LED indicates that both transmit and receive activity is occurring.

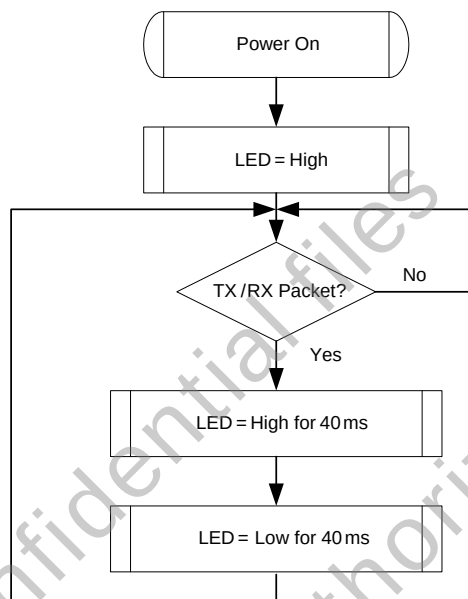


Figure 9. TX/RX LED

8.4.6. LINK/ACT LED

In 10/100M mode, blinking of the LINK/ACT LED indicates that the RTL8201FR-VB is linked and operating properly. When this LED is high for extended periods, it indicates that a link problem exists.

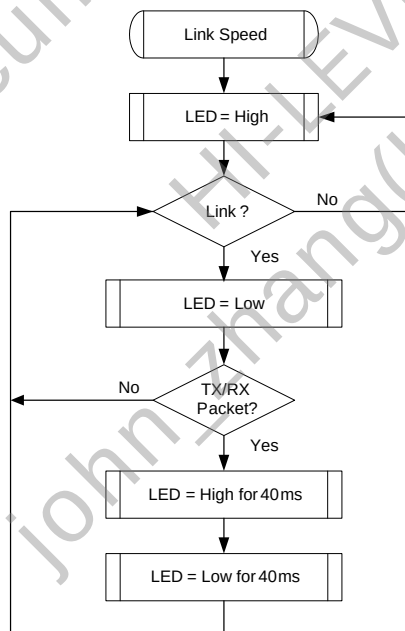


Figure 10. LINK/ACT LED

8.4.7. Customized LED

The RTL8201FR-VB supports programmable LEDs in 10/100Mbps mode. This function can be enabled/disabled via page7, reg19[3] register (Figure 11).

Refer to section 7.17, page 19 for customized LED register setting.

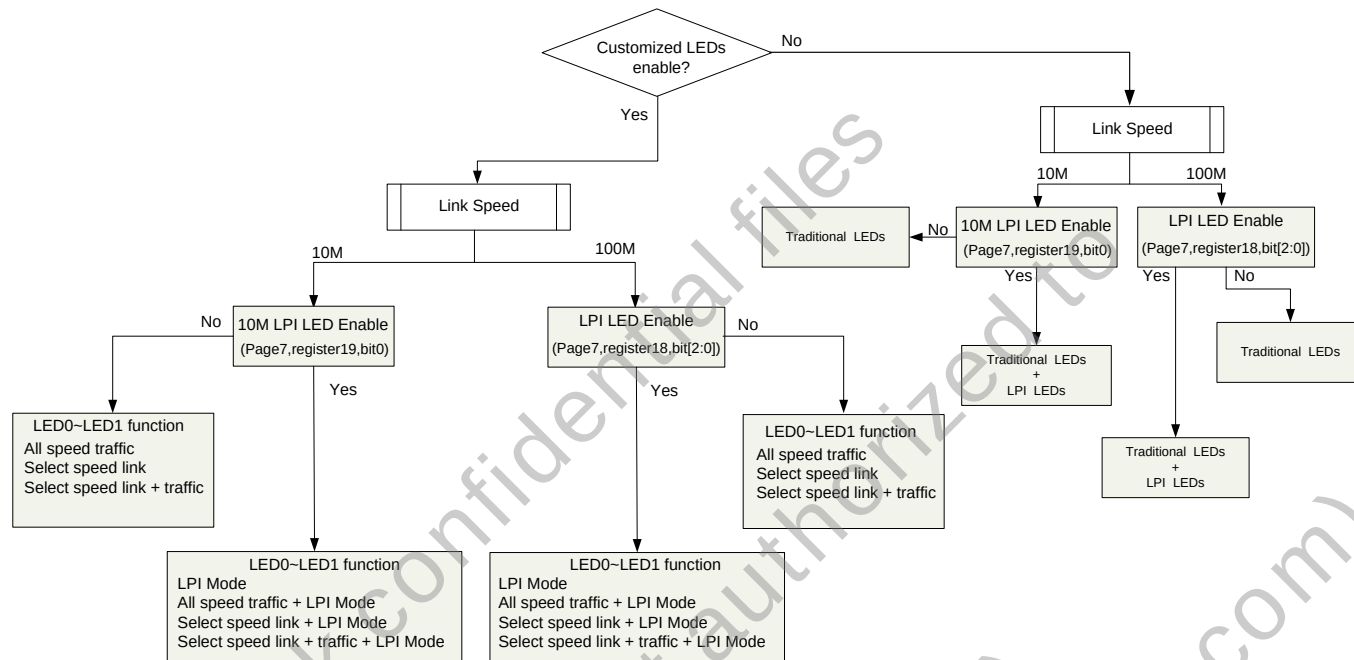


Figure 11. Customized LED with/without LPI LED Mode

8.4.8. EEE LED Behavior

EEE Idle mode: LED continuous slow blinking.

EEE Active mode: LED fast and slow blinking (on packet transmission and reception).

Refer to Table 26, page 19 for EEE LED enable setting.

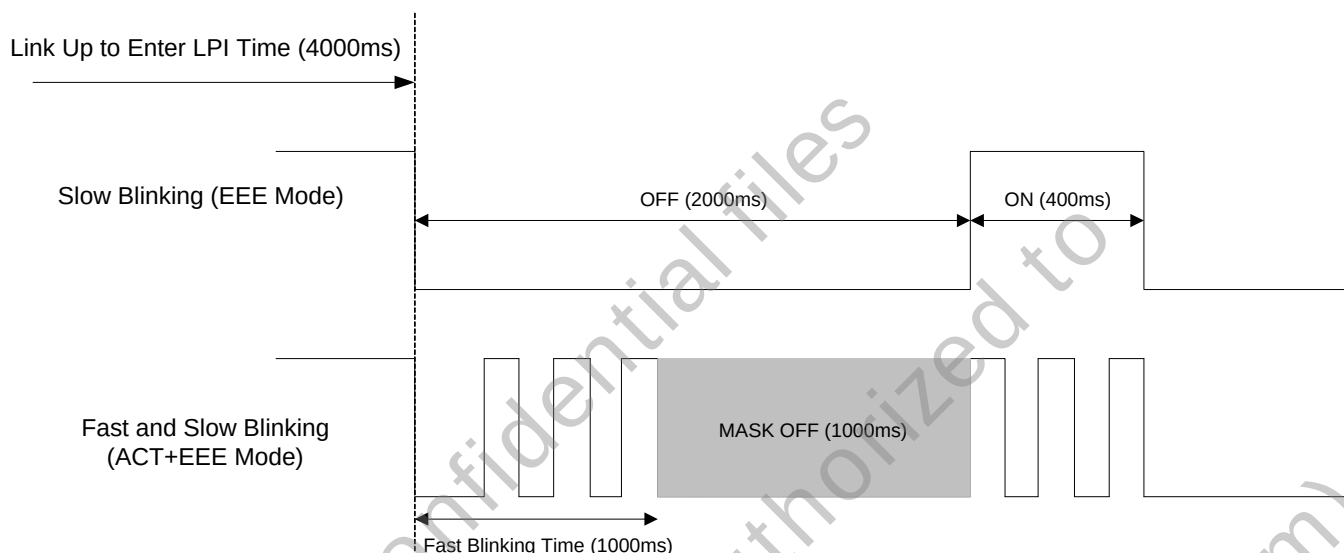


Figure 12. EEE LED Behavior

8.5. Power Down and Link Down Power Saving Modes

Two types of Power Saving mode operation are supported. This section describes how to implement each mode through software.

Table 41. Power Saving Mode Pin Settings

Mode	Description
PWD	Setting Bit 11, Register 0 to 1 will Put the RTL8201FR-VB Into Power Down Mode (PWD). This is the maximum power saving mode while the RTL8201FR-VB is still 'live'. In PWD mode, the RTL8201FR-VB will turn off all analog/digital functions except the MDC/MDIO management interface. Therefore, if the RTL8201FR-VB is put into PWD mode and the MAC wants to recall the PHY, it must create the MDC/MDIO timing by itself (this is done by software).
LDPS	Setting Bit 15, Register 24 to 1 will Put the RTL8201FR-VB Into Link Down Power Saving Mode (LDPS). In LDPS mode, the RTL8201FR-VB will detect the link status to decide whether or not to turn off the transmit function. If the link is off, FLP or 100Mbps IDLE/10Mbps NLP will not be transmitted. However, some signals similar to NLP will be transmitted. Once the receiver detects leveled signals, it will stop the signal and transmit FLP or 100Mbps IDLE/10Mbps NLP again. This can cut power used by 60%~80% when the link is down.

8.6. 10/100M Transmit and Receive

8.6.1. 100Base-TX Transmit and Receive Operation

100Base-TX Transmit

Transmit data in 4-bit nibbles (TXD[3:0]) clocked at 25MHz (TxC) is transformed into 5B symbol code (4B/5B encoding). Scrambling, serializing, and conversion to 125MHz, and NRZ to NRZI then takes place. After this process, the NRZI signal is passed to the MLT-3 encoder, then to the transmit line driver. The transmitter will first assert TXEN. Before transmitting the data pattern, it will send a /J/K/ symbol (Start-of-frame delimiter), the data symbol, and finally a /T/R/ symbol known as the End-Of-Frame delimiter. For better EMI performance, the seed of the scrambler is based on the PHY address. In a hub/switch environment, each RTL8201FR-VB will have different scrambler seeds and so spread the output of the MLT-3 signals.

100Base-TX Receive

The received signal is compensated by the adaptive equalizer to make up for signal loss due to cable attenuation and Inter Symbol Interference (ISI). Baseline Wander Correction monitors the process and dynamically applies corrections to the process of signal equalization. The Phase Locked Loop (PLL) then recovers the timing information from the signals and from the receive clock. With this, the received signal is sampled to form NRZI (Non-Return-to-Zero Inverted) data. The next steps are the NRZI to NRZ (Non-Return-to-Zero) process, unscrambling of the data, serial to parallel and 5B to 4B conversion, and passing of the 4B nibble to the MII interface.

8.6.2. 100Base-FX Fiber Transmit and Receive Operation

The RTL8201FR-VB can be configured to 100Base-FX mode via hardware configuration. The hardware 100Base-FX setting takes priority over NWay settings. A scrambler is not required in 100Base-FX.

100Base-FX Transmit

Di-bits of TXD are processed as 100Base-TX except without a scrambler before the NRZI stage. Instead of converting to MLT-3 signals, as in 100Base-TX, the serial data stream is driven out as NRZI PECL signals, which enter the fiber transceiver in differential-pair form.

100Base-FX Receive

The signal is received through PECL receiver inputs from the fiber transceiver and directly passed to the clock recovery circuit for data/clock recovery. The scrambler/de-scrambler is bypassed in 100Base-FX.

8.6.3. 10Base-T Transmit and Receive Operation

10Base-T Transmit

Transmit data in 4-bit nibbles (TXD[3:0]) clocked at 2.5MHz (TxC) is first fed to a parallel-to-serial converter, then the 10Mbps NRZ signal is sent to a Manchester encoder. The Manchester encoder converts the 10Mbps NRZ data into a Manchester Encoded data stream for the TP transmitter and adds a Start of Idle pulse (SOI) at the end of the packet as specified in IEEE 802.3. Finally, the encoded data stream is shaped by a band-limited filter embedded in the RTL8201FR-VB and then transmitted.

10Base-T Receive

In 10Base-T receive mode, the Manchester decoder in the RTL8201FR-VB converts the Manchester encoded data stream into NRZ data by decoding the data and stripping off the SOI pulse. The serial NRZ data stream is then converted to a parallel 4-bit nibble signal (RXD[0:3]).

8.7. Reset and Transmit Bias

There are two RTL8201FR-VB reset types:

1. Hardware Reset: Pull the PHYRSTB pin high for at least 150ms to access the RTL8201FR-VB registers. Pull the PHYRSTB pin low for at least 10ms and then pull high. All registers will return to default values after a hardware reset. The media interface will disconnect and restart the auto-negotiation/parallel detection process.
2. Software Reset: Set register 0 bit 15 to 1 for at least 20ms to access the RTL8201FR-VB registers. A Software reset will only partially reset the registers, and will reset the chip status to 'initializing'.

The RSET pin must be pulled low by a 2.49K Ω resistor with 1% accuracy to establish an accurate transmit bias. This will affect the signal quality of the transmit waveform. Keep its circuitry away from other clock traces and transmit/receive paths to avoid signal interference.

8.8. 3.3V Power Supply and Voltage Conversion Circuit

The RTL8201FR-VB is fabricated in a 0.11 μ m process. The core circuit needs to be powered by 1.05V, however, the digital IO and DAC circuits need a 3.3V power supply. Regulators are embedded in the RTL8201FR-VB to convert 3.3V to 1.05V.

Note: An external 1.05V power supply is not suggested for the RTL8201FR-VB, as the internal regulators cannot be disabled (the RTL8201FR-VB does not have an EN_LDO_OUT pin to disable the internal 1.05V power supply), and the two 1.05V power sources may conflict.

As with many commercial voltage conversion devices, the 1.05V output pin of this circuit requires the use of an output capacitor (0.1 μ F X5R low-ESR ceramic capacitor is recommended) as part of the device frequency compensation.

The analog and digital ground planes should be as large and intact as possible. If the ground plane is large enough, the analog and digital grounds can be separated, which is the ideal configuration. However, if the total ground plane is not sufficiently large, partition of the ground plane is not a good idea. In this case, all the ground pins can be connected together to a larger single and intact ground plane.

Note: The embedded 1.05V LDO is designed for PHYceiver device internal use only. Do not provide this power to other devices.

8.9. Automatic Polarity Correction

The RTL8201FR-VB automatically corrects polarity errors on the receive pairs in 10Base-T mode (polarity is irrelevant in 100Base-TX mode). In 10Base-T mode, polarity errors are corrected based on the detection of validly spaced link pulses. Detection begins during the MDI crossover detection phase and locks when the 10Base-T link is up. The polarity becomes unlocked when the link goes down.

8.10. Far End Fault Indication

The basic mode status Reg.1.4 (Remote Fault) is the Far End Fault Indication (FEFI) bit when 100FX mode is enabled, and indicates when a FEFI has been detected. FEFI is an alternative in-band signaling method that is composed of 84 consecutive '1's followed by one '0'. When the RTL8201FR-VB detects this pattern three times, Reg.1.4 is set, which means the transmit path (the Remote side's receive path) has a problem. On the other hand, if an incoming signal fails to cause a 'Link OK', the RTL8201FR-VB will start sending this pattern, which in turn causes the remote side to detect a Far End Fault. This means that the receive path has a problem from the point of view of the RTL8201FR-VB. The FEFI mechanism is used only in 100Base-FX mode.

8.11. Wake-On-LAN (WOL)

8.11.1. Magic Packet and Wake-Up Frame Format

The RTL8201FR-VB can monitor the network for a Wake-Up Frame or a Magic Packet, and notify the system via the PMEB (Power Management Event; 'B' means low active) pin when such a packet or event occurs. The system can then be restored to a normal state to process incoming jobs. The PMEB pin must be connected with a 4.7k-ohm resistor and pulled up to 3.3V. When the Wake-Up Frame or a Magic Packet is sent to the PHY, the PMEB pin will be set low to notify the system to wake up. Refer to the WOL application note for details.

Magic Packet Wake-Up occurs only when the following conditions are met:

- The destination address of the received Magic Packet is acceptable to the RTL8201FR-VB, e.g., a broadcast, multicast, or unicast packet addressed to the current RTL8201FR-VB.
- The received Magic Packet does not contain a CRC error.
- The Magic Packet pattern matches; i.e., $6 * FFh + MISC$ (can be none) + $16 * DID$ (Destination ID) in any part of a valid Ethernet packet.

A Wake-Up Frame event occurs only when the following conditions are met:

- The destination address of the received Wake-Up Frame is acceptable to the RTL8201FR-VB, e.g., a broadcast, multicast, or unicast address to the current RTL8201FR-VB.
- The received Wake-Up Frame does not contain a CRC error.

- The 16-bit CRC of the received Wake-Up Frame matches the 16-bit CRC of the sample Wake-Up Frame pattern given by the local machine's OS. Or, the RTL8201FR-VB is configured to allow direct packet wake up, e.g., a broadcast, multicast, or unicast network packet.

Note 1: 16-bit CRC: The RTL8201FR-VB supports eight long Wake-Up frames (covering 128 mask bytes from offset 0 to 127 of any incoming network packet). CRC16 polynomial = $x^{16} + x^{12} + x^5 + 1$.

Note 2: Refer to the WOL Application Note for detailed Wake-On-LAN register settings and waveform timings.

8.11.2. Active Low Wake-On-LAN

When the PHY receives a Wake-Up Frame or a Magic Packet from the link partner, the PMEB pin will go low and the MAC will wake up after a T cycle. The PMEB pin will be reset to high via the system or MAC Reset.

Refer to the WOL Application Note for details.

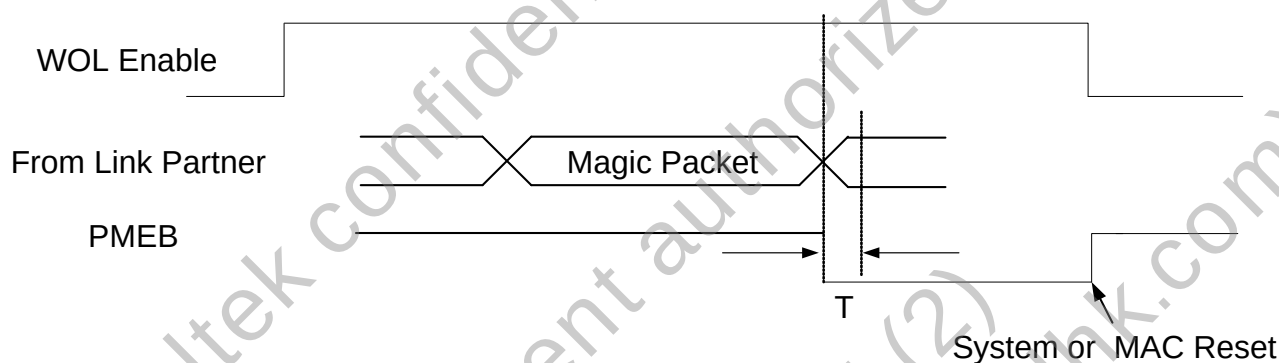


Figure 13. Active Low When Receiving a Magic Packet

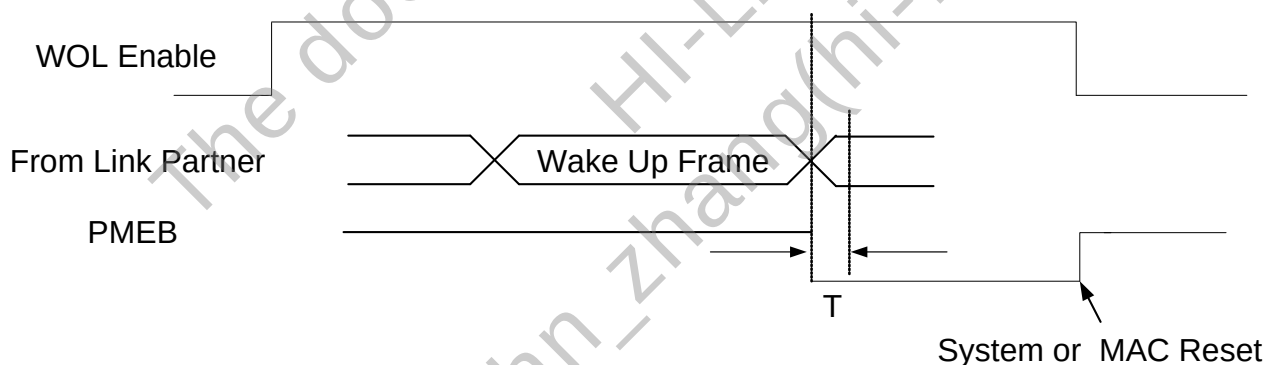


Figure 14. Active Low When Receiving a Wake-Up Frame

8.11.3. Pulse Low Wake-On-LAN

When the PHY receives a Wake-Up Frame or a Magic Packet from the link partner, the PMEB pin will go low for a period (84ms, 168ms (default), 336ms, or 672ms; set through the MDC/MDIO), and will wake up after a T cycle (Figure 15 and Figure 16).

Refer to the WOL Application Note for details.

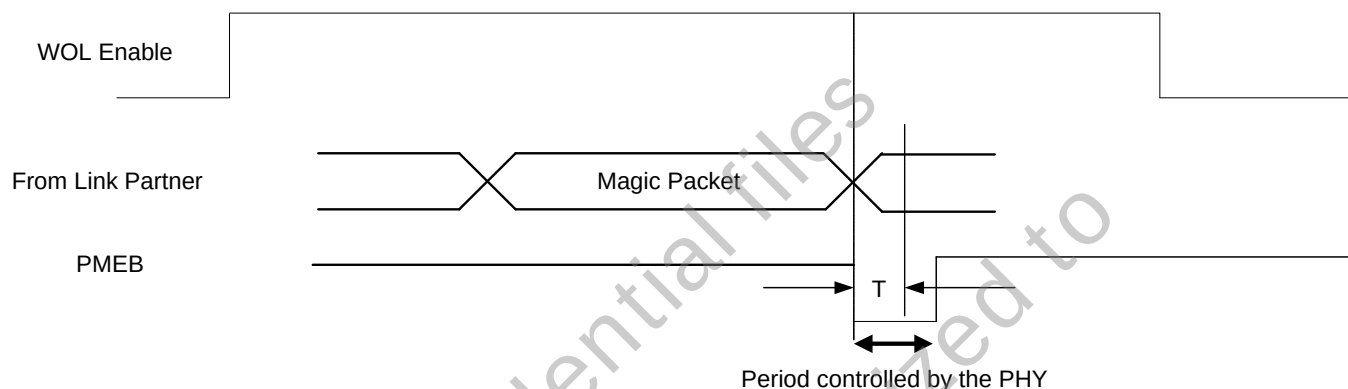


Figure 15. Pulse Low When Receiving a Magic Packet

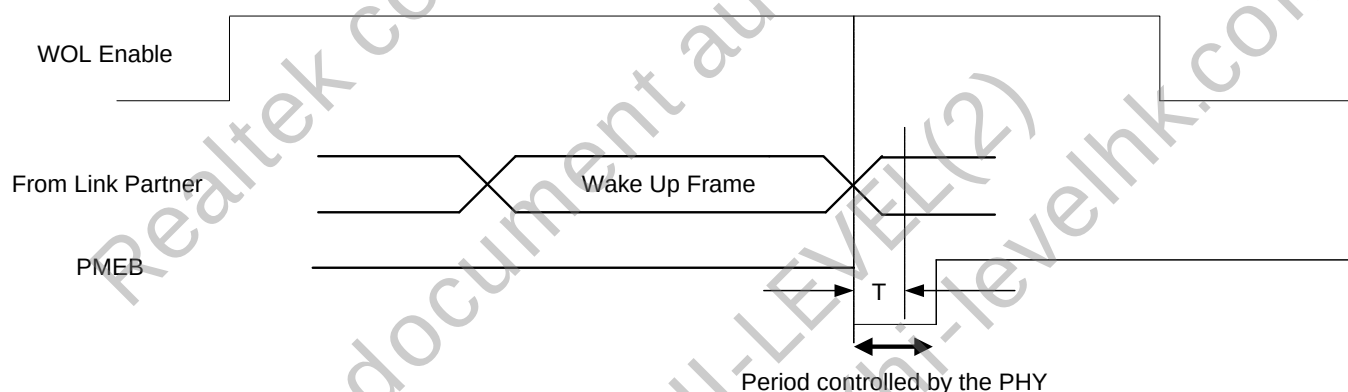


Figure 16. Pulse Low When Receiving a Wake-Up Frame

8.11.4. Wake-On-LAN Pin Types

Table 42. Wake-On-LAN Pin Types

Name	Type	Normal			WOL Enable
		100M	10M	Idle	
TXC (REF_CLK) ¹	IO/PD	50M CLK Input/Output	50M CLK Input/Output	50M CLK Input/Output	I/O (50M) ²
TXEN	I/PD	I	I	I	I/PD
TXD[0:1]	I/PD	I	I	I	I/PD
CRS_DV	LI/O/PD	O	O	O	O or PD ³
RXD[0:1]	O/PD	O	O	O	O or PD ³
RXER	LI/O/PD	O	O	O	O or PD ³
MDC	I/PU	I	I	I	I/PU
MDIO	IO/PU	IO	IO	IO	IO/PU

Note 1: If TXC (REF_CLK) is in input mode (MAC to PHY), the REF_CLK cannot stop at WOL Enable.

Note 2: When REF_CLK is in output mode (PHY to MAC), the REF_CLK cannot halt (always toggles 50MHz out). To set the TXC pin type to 'PD', set page0, register0, bit10=1.

Note 3: If RX Isolate=1, all the MII RX interfaces are halted and the pin types are 'PD'.

8.12. Energy Efficient Ethernet (EEE)

The RTL8201FR-VB supports IEEE 802.3az-2010, also known as Energy Efficient Ethernet (EEE), at 10Mbps and 100Mbps. It provides a protocol to coordinate transitions to/from a lower power consumption level (Low Power Idle mode) based on link utilization. When no packets are being transmitted, the system goes to Low Power Idle mode to save power. When packets need to be transmitted, the system returns to normal mode, and does this without changing the link status and without dropping/corrupting frames.

To save power, when the system is in Low Power Idle mode, most of the circuits are disabled; however, the transition time to/from Low Power Idle mode is kept small enough to be transparent to upper layer protocols and applications.

EEE also specifies a negotiation method to enable link partners to determine whether EEE is supported.

Refer to <http://www.ieee802.org/3/az/index.html> for more details.

Refer to the 'RTL8201FR_RMII_Behavior_in_EEE_App_Note' for EEE RMII power saving mode register settings.

8.13. Spread Spectrum Clock (SSC)

The RMII REF_CLK path can be a source of EMI noise. Spread Spectrum Clock (SSC) spreads the REF_CLK signal across a wider bandwidth, reducing the peak radiated energy at any one frequency, and lowering unwanted EMI noise.

The SSC function is enabled by default when using RMII REF_CLK output mode (see section 7.22 Page7 Register 24 Spread Spectrum Clock Register, page 21).

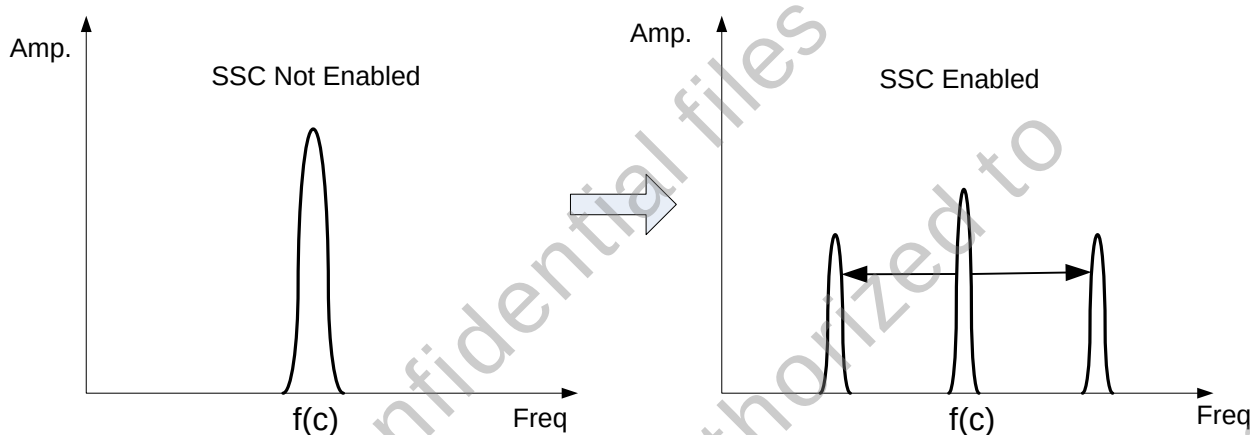


Figure 17. Spread Spectrum Clock

9. Characteristics

9.1. DC Characteristics

9.1.1. Absolute Maximum Ratings

Table 43. Absolute Maximum Ratings

Symbol	Description	Minimum	Maximum	Unit
DVDD33, AVDD33	Supply Voltage 3.3V	-0.3	+3.7	V
DVDD10OUT, AVDD10OUT	Supply Voltage 1.05V	-0.1	+1.26	V
DC Input	Input Voltage	-0.3	Corresponding Supply Voltage +0.5V	V
DC Output	Output Voltage	-0.3	Corresponding Supply Voltage +0.5V	V
N/A	Storage Temperature	-55	+125	°C

9.1.2. Operating Conditions


Table 44. Operating Conditions

Description	Pins	Minimum	Typical	Maximum	Unit
Supply Voltage VDD*	DVDD33, AVDD33	2.97	3.30	3.63	V
	DVDD10OUT, AVDD10OUT	1.00	1.05	1.16	V
Ambient Operating Temperature T _A	-	0	-	70	°C
Maximum Junction Temperature	-	-	-	125	°C

Note: The Supply Voltage VDD power bouncing is less than ±50mV.

9.1.3. Power On and PHY Reset Sequence

The RTL8201FR-VB needs 150ms power on time. After 150ms it can access the PHY register from MDC/MDIO.

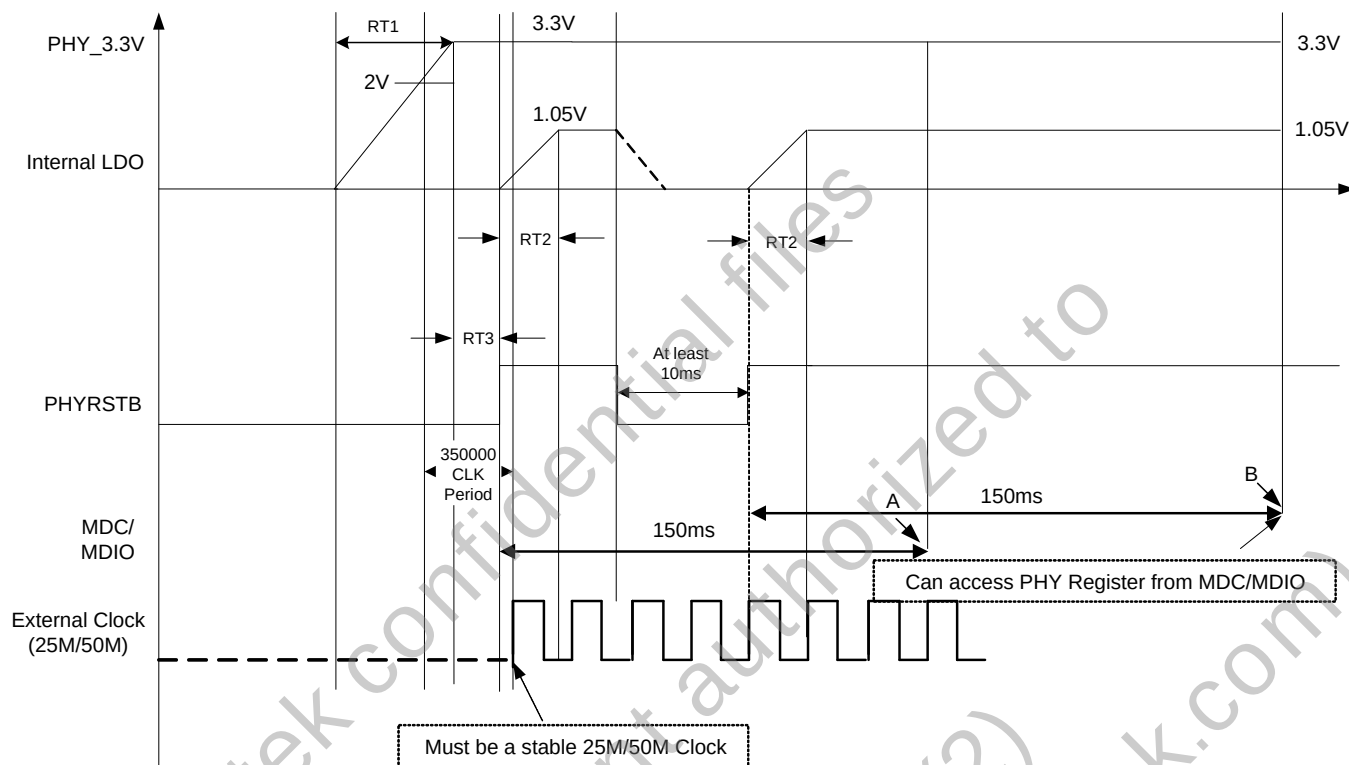

Note 1: If there is no PHY Reset sequence, the MAC can access the PHY Register at point A.

Note 2: If there is a PHY Reset sequence, the MAC can access the PHY Register at point B.

Figure 18. Power On and PHY Reset Sequence

Table 45. Power On and PHY Reset Sequence

Symbol	Description	Minimum	Maximum
Rt1	3.3V Rise Time@ Power On Sequence	100μs	-
Rt2*	1.05V Rise Time@ Power On and PHY Reset Sequence	100μs	-
Rt3	PHYRSTB De-Assert after PHY_3.3V Stable	80μs	-

Note: Rt2 requires 100μs Rise Time only when using an external 1.05V power supply.

9.1.4. RMII Input Mode Power Dissipation

The whole system power dissipation (including regulator loss) is shown in Table 46.

Table 46. RMII Input Mode Power Dissipation (Whole System)

Symbol	Condition	RTL8201FR-VB	Unit
P _{10IDLE}	10Base-T Idle (EEE Not Enabled)	33	mW
P _{10F}	10Base-T Full Duplex	105.6	mW
P _{100IDLE}	100Base-T Idle (EEE Not Enabled)	125.4	mW
P _{100EEE}	100Base-T Idle with EEE	56.1	mW
P _{100F}	100Base-T Full Duplex	168.3	mW
P _{LDPS}	Link Down Power Saving	18.5	mW
P _{PHYRST}	PHY Reset	3.3	mW

Note: Setting page4 register 21 bit12 to '1' will reduce power consumption when the system is idle.

9.1.5. Input Voltage: Vcc

Table 47. Input Voltage: Vcc

Symbol	Condition		Minimum	Maximum
TTL V _{IH}	Input High Voltage	-	2V	Vcc
TTL V _{IL}	Input Low Voltage	-	-0.3V	0.7V
TTL V _{OH}	Output High Voltage	I _{OH} =-8mA	0.65*Vcc	Vcc
TTL V _{OL}	Output Low Voltage	I _{OL} =8mA	-	0.7V
TTL I _{OZ}	Tri-State Leakage	V _{out} =Vcc or GND	-110μA	10μA
I _{IN}	Input Current	V _{in} =Vcc or GND	-1μA	10μA
I _{PL}	Input Current with Internal Weakly Pulled Low Resistor	V _{in} =Vcc or GND	-1μA	100μA
I _{PH}	Input Current with Internal Weakly Pulled High Resistor	V _{in} =Vcc or GND	-110μA	10μA
PECL V _{IH}	PECL Input High Voltage	-	Vdd-1.16V	Vdd-0.88V
PECL V _{IL}	PECL Input Low Voltage	-	Vdd-1.81V	Vdd-1.47V
PECL V _{OH}	PECL Output High Voltage	-	Vdd-1.02V	-
PECL V _{OL}	PECL Output Low Voltage	-	-	Vdd-1.62V

9.2. AC Characteristics

All output timing assumes equivalent loading between 10pF and 25pF that includes PCB layout traces and other connected devices (e.g., MAC).

9.2.1. RMII Transmission and Reception Cycle Timing

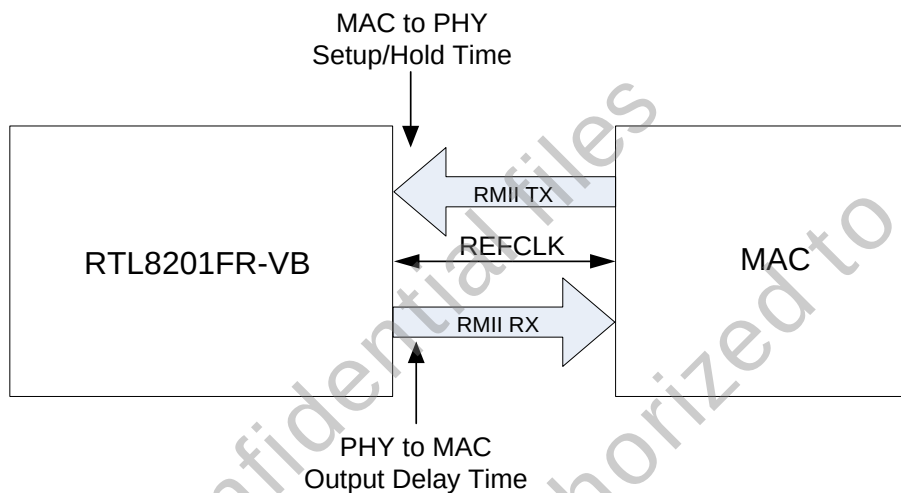
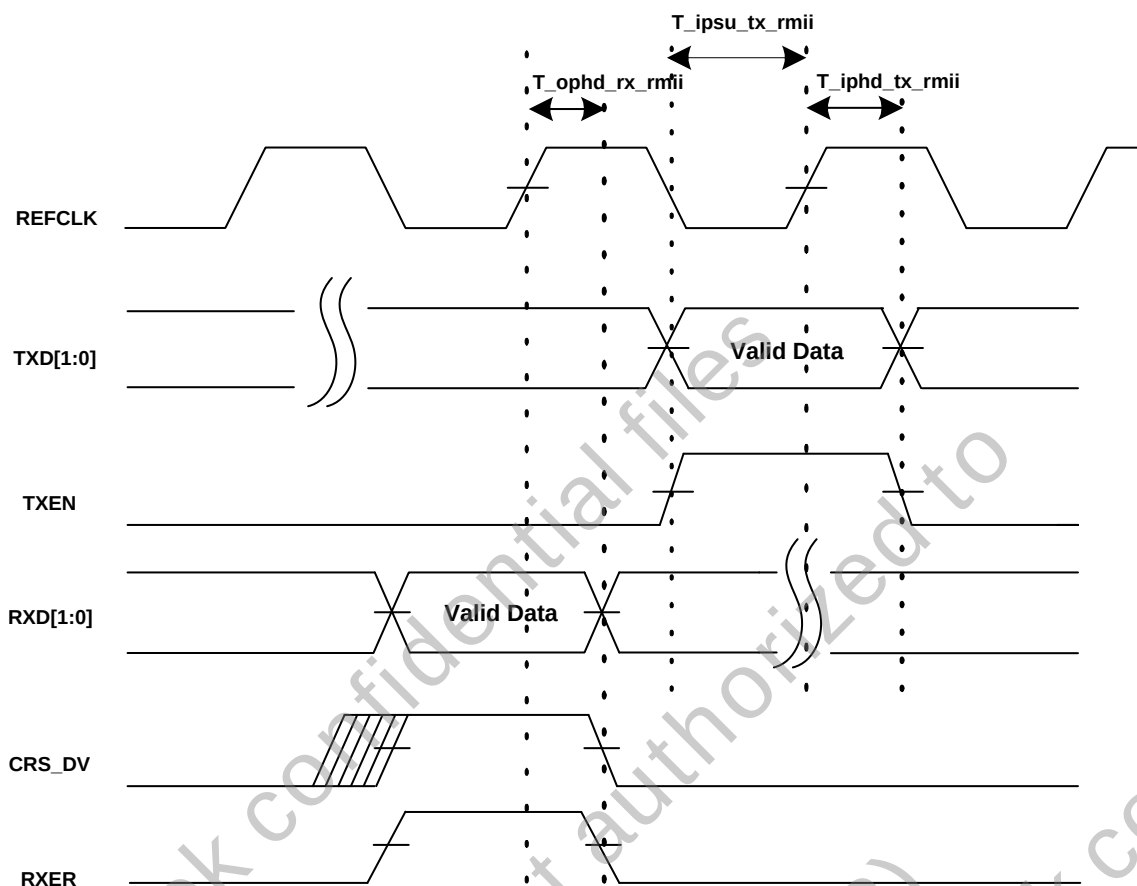


Figure 19. RMII Interfaces Setup, Hold Time, and Output Delay Time Definitions


Figure 20. RMII Transmission and Reception Cycle Timing
Table 48. RMII Transmission and Reception Cycle Timing

Symbol	Description	Minimum	Typical	Maximum	Unit
REFCLK Frequency	Frequency of Reference Clock	-	50	-	MHz
REFCLK Duty Cycle	Duty Cycle of Reference Clock	35	-	65	%
T_ipsu_tx_rmii	TXD[1:0]/TXEN Setup Time to REFCLK	4	-	-	ns
T_iphd_tx_rmii	TXD[1:0]/TXEN Hold Time from REFCLK	2	-	-	ns
T_ophd_rx_rmii	RXD[1:0]/CRS_DV/RXER Output Delay Time from REFCLK	2	-	12	ns

Note 1: RMII TX timing can be adjusted by setting page7, register16[11:8]; the minimum adjustable resolution is 2ns.

Any changes for these bits are not recommended as the default value is the optimum setting.

Note 2: RMII RX timing can be adjusted by setting page7, register16[7:4]; the minimum adjustable resolution is 2ns. Any changes for these bits are not recommended as the default value is the optimum setting.

Note 3: The default setting of T_ophd_rx_rmii is 10 ns.

9.2.2. MDC/MDIO Timing

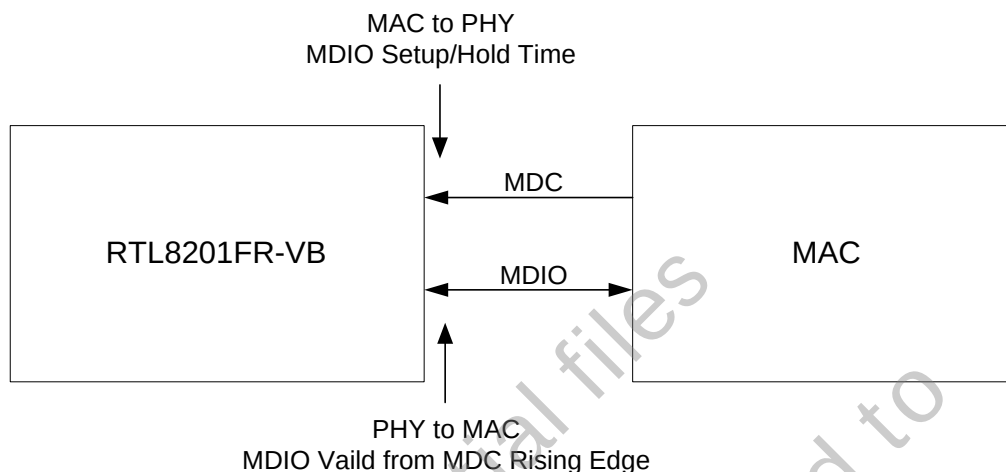


Figure 21. MDC/MDIO Interfaces Setup, Hold Time, and Valid from MDC Rising Edge Time Definitions

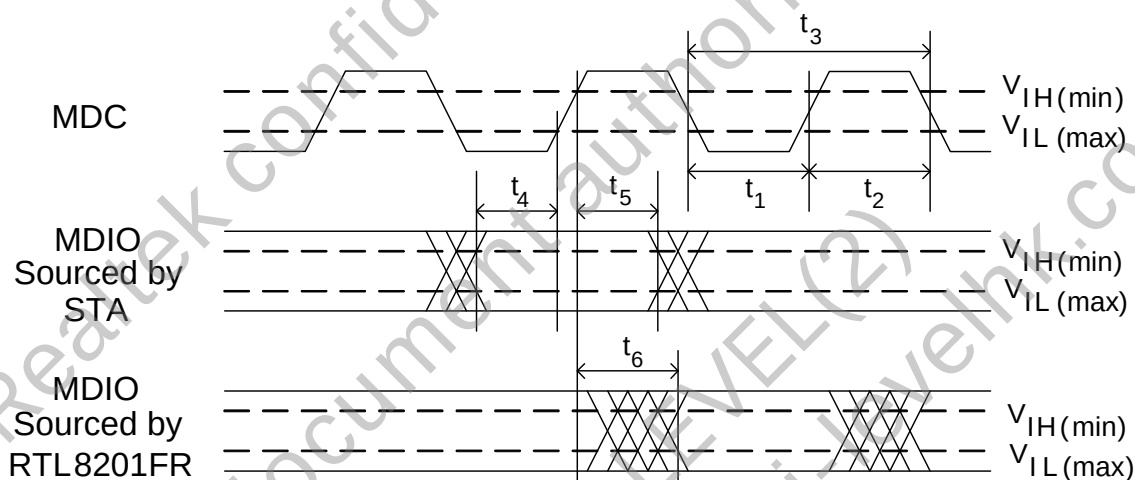


Figure 22. MDC/MDIO Timing

Table 49. MDC/MDIO Timing

Symbol	Description	Minimum	Maximum	Unit
t_1	MDC High Pulse Width	160	-	ns
t_2	MDC Low Pulse Width	160	-	ns
t_3	MDC Period	400	-	ns
t_4	MDIO Setup to MDC Rising Edge	10	-	ns
t_5	MDIO Hold Time from MDC Rising Edge	10	-	ns
t_6	MDIO Valid from MDC Rising Edge	0	300	ns

9.3. Crystal Characteristics

Table 50. Crystal Characteristics

Symbol	Description/Condition	Minimum	Typical	Maximum	Unit
F _{ref}	Parallel Resonant Crystal Reference Frequency, Fundamental Mode, AT-Cut Type.	-	25	-	MHz
F _{ref} Stability	Parallel Resonant Crystal Frequency Stability, Fundamental Mode, AT-Cut Type. T _a =0°C~70°C.	-30	-	+30	ppm
F _{ref} Tolerance	Parallel Resonant Crystal Frequency Tolerance, Fundamental Mode, AT-Cut Type. T _a =25°C.	-50	-	+50	ppm
F _{ref} Duty Cycle	Reference Clock Input Duty Cycle.	40	-	60	%
ESR	Equivalent Series Resistance.	-	-	30	Ω
DL	Drive Level.	-	-	0.3	mW
Jitter	Broadband Peak-to-Peak Jitter ^{1, 2}	-	-	500	ps

Note 1: 25KHz to 25MHz RMS < 3ps.

Note 2: Broadband RMS < 9ps.

9.4. Oscillator Requirements

Table 51. Oscillator Requirements

Parameter	Condition	Minimum	Typical	Maximum	Unit
Frequency	-	-	25/50	-	MHz
Frequency Stability	T _a = 0°C~+70°C	-30	-	30	ppm
Frequency Tolerance	T _a = 25°C	-50	-	50	ppm
Duty Cycle	-	40	-	60	%
Broadband Peak-to-Peak Jitter ^{1, 2}	-	-	-	500	ps
V _{IH}	-	1.4	-	-	V
V _{IL}	-	-	-	0.4	V
Rise Time (10%~90%)	-	-	-	10	ns
Fall Time (10%~90%)	-	-	-	10	ns
Operating Temperature Range	-	0	-	70	°C

Note 1: 25KHz to 25MHz RMS < 3ps.

Note 2: Broadband RMS < 9ps.

9.5. Clock Requirements

Table 52. Clock Requirements

Parameter	Minimum	Typical	Maximum	Unit
Frequency	-	25/50	-	MHz
Frequency Stability	-30	-	30	ppm
Frequency Tolerance	-50	-	50	ppm
Duty Cycle	40	-	60	%
Broadband Peak-to-Peak Jitter ^{1, 2}	-	-	500	ps
V _{IH}	1.4	-	-	V
V _{IL}	-	-	0.4	V
Rise Time (10%~90%)	-	-	10	ns
Fall Time (10%~90%)	-	-	10	ns

Note 1: 25KHz to 25MHz RMS < 3ps.


Note 2: Broadband RMS < 9ps.

9.6. Transformer Characteristics

Table 53. Transformer Characteristics

Parameter	Transmit End	Receive End
Turn Ratio	1:1 CT	1:1 CT
Inductance (min.)	350μH @ 8mA	350μH @ 8mA

10. Mechanical Dimensions

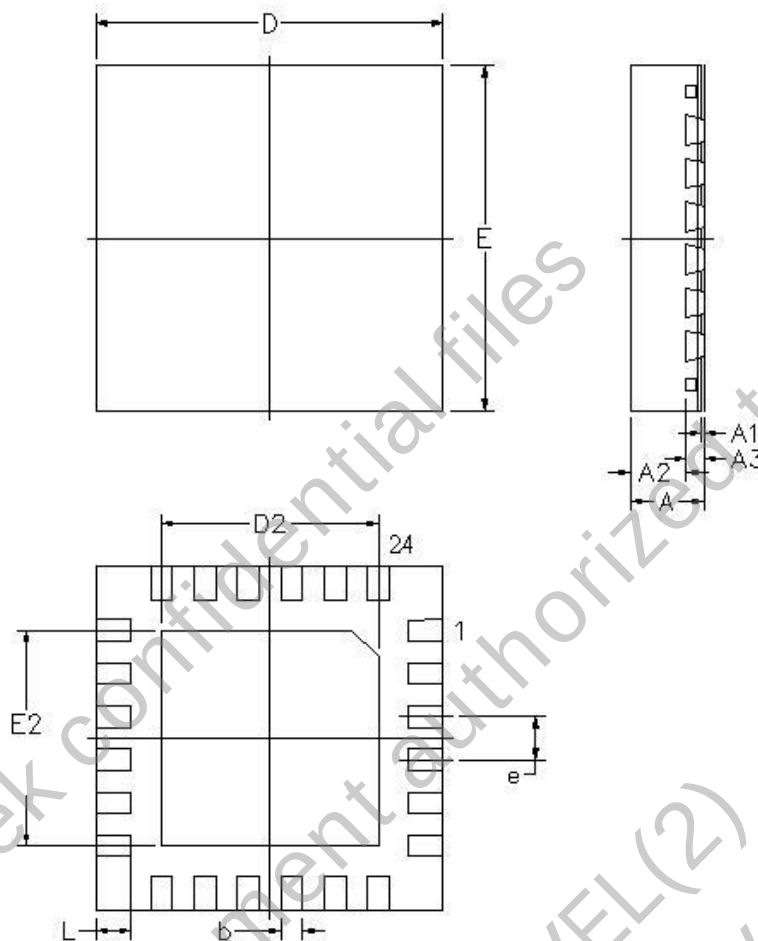

Symbol	Dimensions in mm			Dimensions in inch		
	Min	Nom	Max	Min	Nom	Max
A	0.75	0.85	1.00	0.030	0.034	0.039
A ₁	0.00	0.02	0.05	0.000	0.001	0.002
A ₂	-	0.65	0.70	-	0.026	0.028
A ₃	0.20REF			0.008REF		
b	0.18	0.25	0.30	0.007	0.010	0.012
D/E	4.00BSC			0.158BSC		
D ₂ /E ₂	2.00	2.25	2.50	0.078	0.088	0.098
e	0.50BSC			0.020BSC		
L	0.30	0.40	0.50	0.012	0.016	0.020

Note 1: CONTROLLING DIMENSION: MILLIMETER (mm).

Note 2: REFERENCE DOCUMENT: JEDEC MO-220.

11. Ordering Information

Table 54. Ordering Information

Part Number	Package	Status
RTL8201FR-VB-CG	24-Pin QFN 'Green' Package	MP

Note: See page 5 for package identification.

Realtek Semiconductor Corp.

Headquarters

No. 2, Innovation Road II, Hsinchu Science Park,
Hsinchu 300, Taiwan.

Tel: 886-3-578-0211 Fax: 886-3-577-6047

www.realtek.com