


此商品编号对应的规格参数是： 3.3uF 50V 4*5 黑高频

此商品的实物图片为：

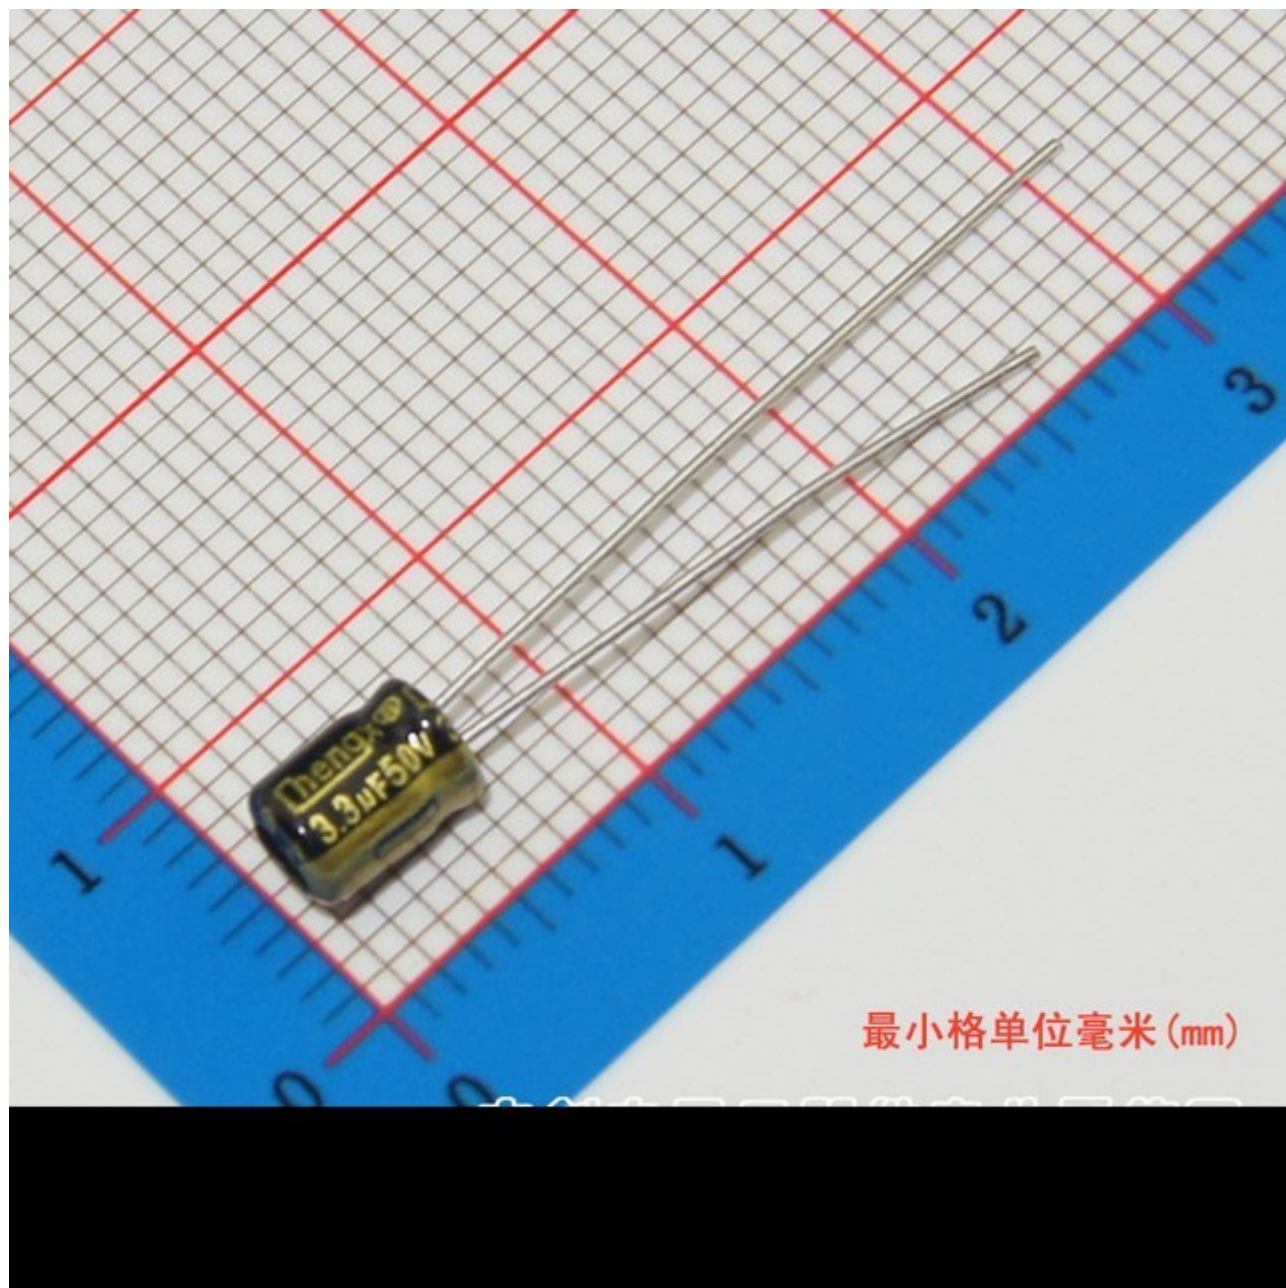

EF Series

5mmL(高), +105°C, Low Impedance(低阻抗品)

FEATURES


1. Low Impedance over wide temperature range of -40°C~105°C, with 5mm height.
2. Suitable for DC-DC converters where smaller case size and lower impedance are required.



SPECIFICATIONS

Item	Performance Characteristics					
Operating Temperature Range	-40 to +105°C					
Rated Working Voltage Range	6.3 to 35V					
Nominal Capacitance Range	1 to 100 μ F					
Capacitance Tolerance	$\pm 20\%$ (120Hz, +20°C)					
Leakage Current	$I \leq 0.01CV$ or $3(\mu A)$ whichever is greater measured after 2 minutes application of rated working voltage at +20°C					
tan δ (120Hz, +20°C)	Working Voltage (V)	6.3	10	16	25	35
	tan δ (max.)	0.22	0.20	0.18	0.14	0.12
Low Temperature Characteristics	Impedance ratio max. at 120Hz					
	Working Voltage (V)	6.3	10	16	25	35
	Z-25°C / Z+20°C	2	3	2	2	2
	Z-40°C / Z+20°C	4	8	6	3	3
High Temperature Loading	Test conditions			Post test requirements at +20°C		
	Duration	: 1000 hours		Leakage current	: \leq Initial specified value	
	Ambient temp.	: +105°C		Cap. change	: within $\pm 20\%$ of initial measured value	
	Applied voltage	: Rated DC working voltage with rated ripple current		tan δ	: $\leq 200\%$ of initial specified value	
Shelf Life	Test conditions			Post test requirements at +20°C		
	Duration	: 1000 hours		Leakage current	: \leq Initial specified value	
	Ambient temp.	: +105°C		Cap. change	: within $\pm 20\%$ of initial measured value	
	Applied voltage	: (None)		tan δ	: $\leq 200\%$ of initial specified value	
Others	JIS C - 5101 (IEC 60384)					

CASE SIZE TABLE

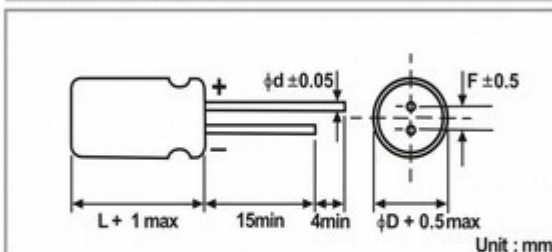

ϕD	4	5	6.3					
F	1.5	2.0	2.5					
ϕd	0.45							

RIPPLE CURRENT MULTIPLIER

Frequency Coefficient					
Cap(μ F)	Coefficient	120	1k	10k	100k
~ 100		0.40	0.75	0.90	1.00

EF Series

5mmL(高), +105°C, Low Impedance(低阻抗品)

STANDARD RATINGS

Voltage (Code)		6.3V (0J)			10V (1A)			16V (1C)		
Cap.(μ F)	Code	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current
1	105									
1.5	155									
2.2	225									
3.3	335									
4.7	475									
6.8	685									
10	106							4 x 5	5.0	50
15	156							5 x 5	2.6	80
22	226	4 x 5	5.0	50	5 x 5	2.6	80	5 x 5	2.6	80
33	336	5 x 5	2.6	80	5 x 5	2.6	80	6.3 x 5	1.3	115
47	476	5 x 5	2.6	80	6.3 x 5	1.3	115	6.3 x 5	1.3	115
68	686	6.3 x 5	1.3	115						
100	107	6.3 x 5	1.3	115						

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Case Size ϕ D x L(mm)

Maximum Impedance (Ω) at 20°C 100kHz

Voltage (Code)		25V (1E)			35V (1V)					
Cap.(μ F)	Code	Case Size	Impedance	Ripple Current	Case Size	Impedance	Ripple Current			
1	105				4 x 5	5.0	50			
1.5	155				4 x 5	5.0	50			
2.2	225				4 x 5	5.0	50			
3.3	335				4 x 5	5.0	50			
4.7	475	4 x 5	5.0	50	4 x 5	5.0	50			
6.8	685	4 x 5	5.0	80	5 x 5	2.6	80			
10	106	5 x 5	2.6	80	5 x 5	2.6	80			
15	156	6.3 x 5	1.3	115	6.3 x 5	1.3	115			
22	226	6.3 x 5	1.3	115	6.3 x 5	1.3	115			
33	336	6.3 x 5	1.3	115						

Maximum Allowable Ripple Current (mA rms) at 105°C 100kHz

Case Size ϕ D x L(mm)

Maximum Impedance (Ω) at 20°C 100kHz