

Low EMI 20W Stereo Class D Audio Amplifier

General Description

The VA2236 is a cost-effective filter-less Class D stereo audio power amplifier that operates in wide range of various power supplies. VA2236 is designed with fixed 26dB gain setting. VA2236 can output 15W per channel into 8Ω load with lower supply current and fewer external components for driving bridged-tied stereo speaker directly with excellent EMI performance. With the function of power limit, the speakers could be operated safely.

VA2236 operates with high efficiency energy conversion up to 88% (8Ω Load) so that the external heat sink can be eliminated while playing music.

VA2236 also integrates Anti-Pop, Output Short & Over-Heat Protection Circuitry to ensure device reliability. This device also provides the DC detect and protection scheme to prevent the damage of speaker voice coils.

The VA2236 is available in small SO-16P green package with exposed pad.


Features

- Operation Voltage from 6V to 20V
- Excellent EMI Performance for Filter-Free Operation
- Maximum 88% Efficiency with an 8Ω Speaker
- 15W@4Ω Load at 12V
- 20W@8Ω Load at 18V
- 26dB Fixed Gain Setting
- Speaker DC Detection and Protection
- Thermal Protection with Auto-Recovery
- Speaker Protection Circuitry
- Short Circuit and Thermal Protection
- RoHS 2.0 compliant SO-16P Green Package with Exposed Pad


Applications

- LCD TV
- Multimedia Speakers
- Sound Bar


Typical Application

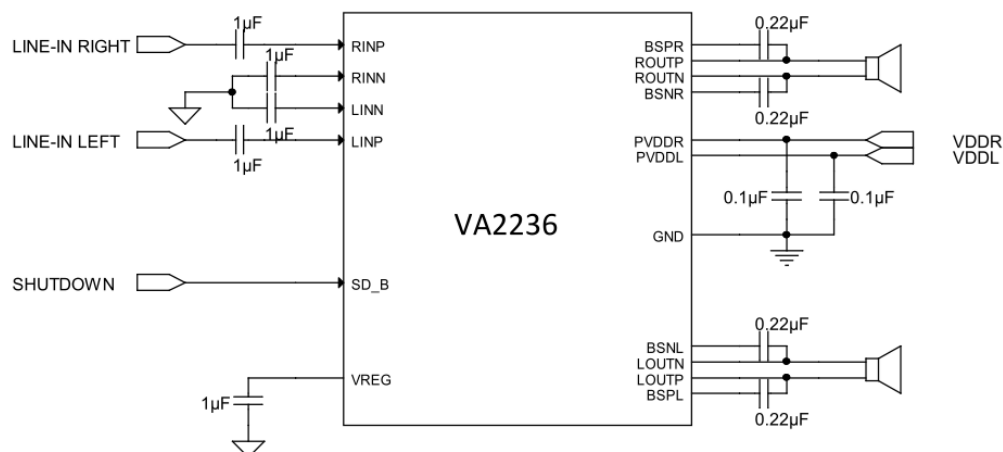

Functional Block Diagram

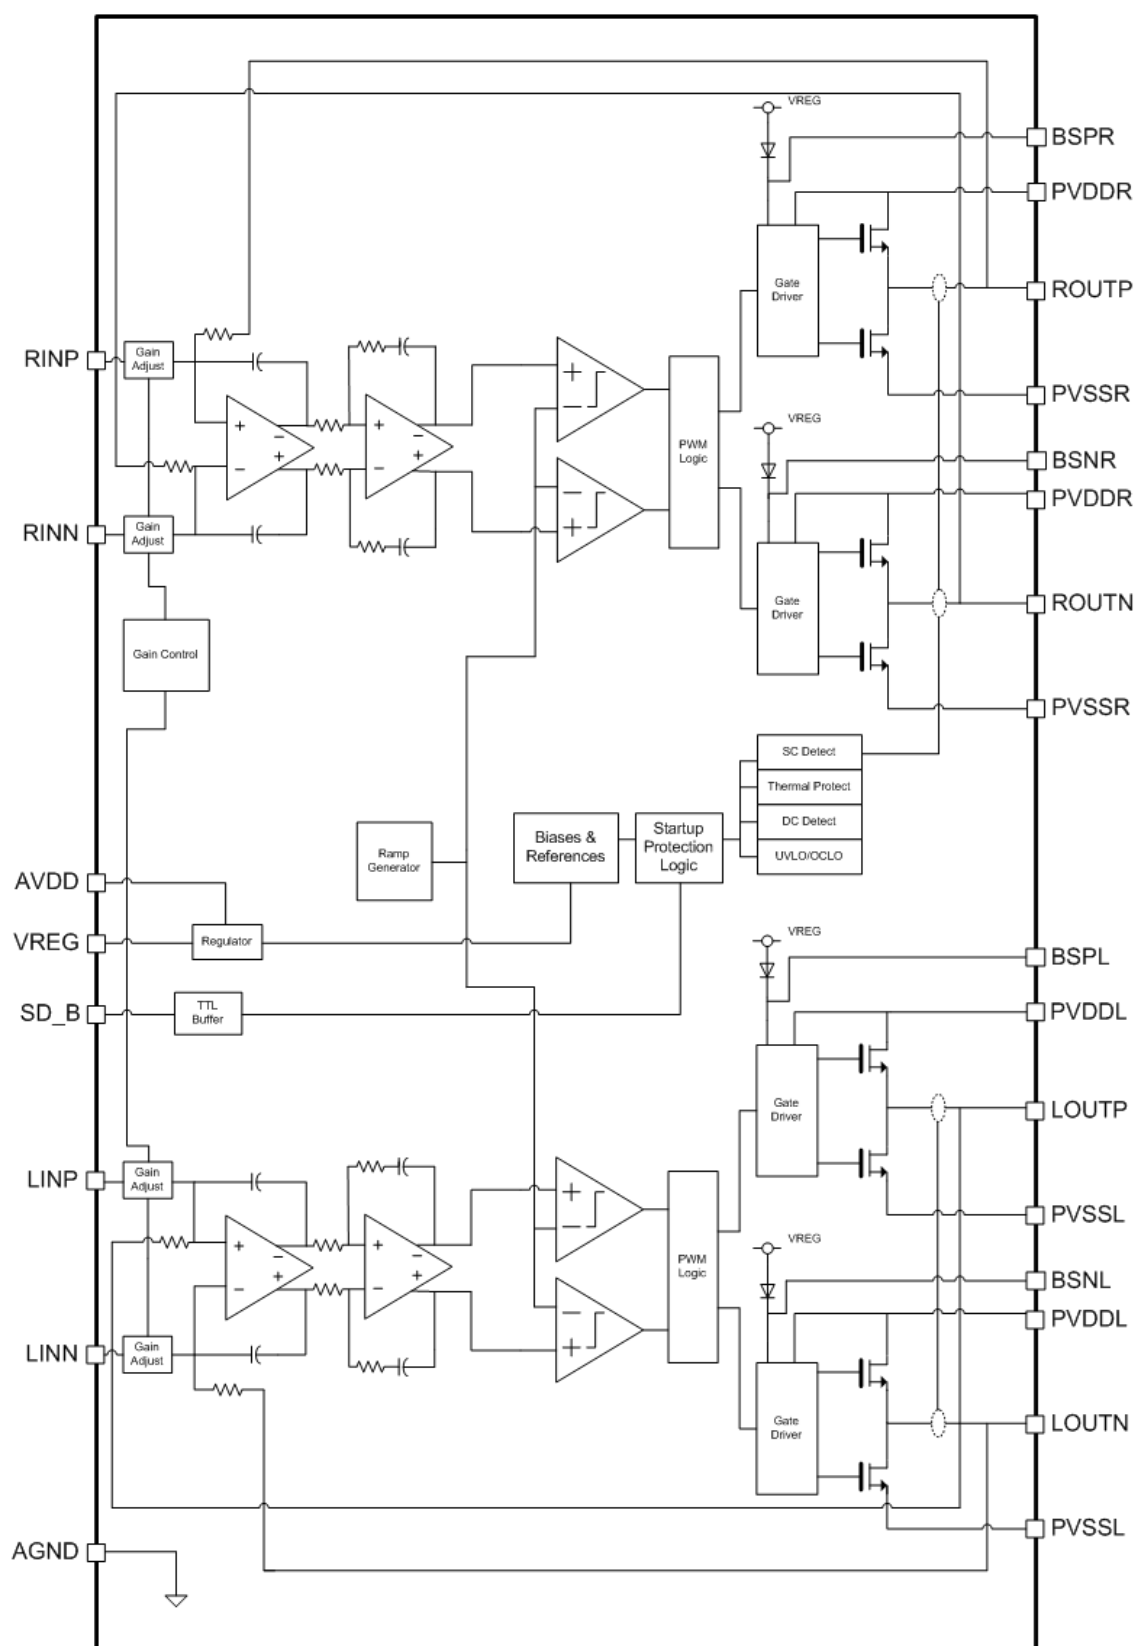

Pin Assignments And Descriptions

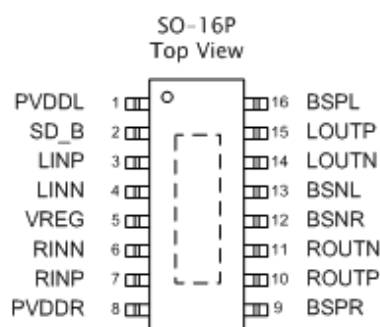

Pin No.	Pin	I/O/P	Function Description
1	PVDDL	P	Left Channel power supply.
2	SD_B	I	Shutdown control terminal. Low active. TTL Logic levels with compliance to PVDDL/PVDDR.
3	LINP	I	Left channel positive audio signal input.
4	LINN	I	Left channel negative audio signal input.
5	VREG	O	Regulated voltage. Nominal voltage is 5.75V.
6	RINN	I	Right channel negative audio signal input.
7	RINP	I	Right channel positive audio signal input.
8	PVDDR	P	Right channel power supply
9	BSPL	–	Bootstrap I/O for right channel positive high-side switch.
10	ROUTP	O	Right channel positive output.
11	ROUTN	O	Right channel negative output.
12	BSNR	–	Bootstrap I/O for right channel negative high-side switch.
13	BSNL	–	Bootstrap I/O for left channel negative high-side switch.
14	LOUTN	O	Left channel negative output.
15	LOUTP	O	Left channel positive output.
16	BSPL	–	Bootstrap I/O for left channel positive high-side switch.
EP	GND	P	System ground.

Absolutely Maximum Ratings

Over operating free-air temperature range, unless otherwise specified (* 1)

Symbol	Parameter	Limit	Unit
$V_{DD}(PVDDR, PVDDL)$	Supply voltage	-0.3 to 30	V
$V_I(SD_B)$	Input voltage	-0.3 to $V_{DD}+0.3$	V
$V_I(LINN, RINN, LINP, RINP)$	Input voltage	-0.3 to 6.5	V
T_A	Operating free-air temperature range	-40 ~ +85	°C
T_J	Operating junction temperature range(* 2)	-40 to +150	°C
T_{STG}	Storage temperature range	-65 to 150	°C
$R_{(LOAD)}$	Minimum load resistance	8 ($V_{DD}>15V$) 4 ($V_{DD}\leq 15V$)	Ω
θ_{JC}	Thermal Resistance (Junction to Case)	10	°C/W
θ_{JA}	Thermal Resistance (Junction to Air)	45	°C/W
Electrostatic discharge	Human body model	± 2	kV
Electrostatic discharge	Machine model	± 200	V

(*1): Stress beyond those listed at "absolute maximum rating" table may cause permanent damage to the device. These are stress rating ONLY. For functional operation are strongly recommend follow up "recommended operation conditions" table.

Recommended Operating Conditions

Over operating free-air temperature range, unless otherwise specified.

Symbol	Parameter	Test Condition	Specification		Unit
			Min	Max	
V_{DD}	Supply voltage	PVDDL, PVDDR	6	20	V
V_{IH}	High level input voltage (SD_B)	$V_{DD}=24V$	2		V
V_{IL}	Low level input voltage (SD_B)	$V_{DD}=24V$		0.8	V
T_A	Operating free-air temperature		-40	85	°C

Electrical Characteristics

$T_A = 25^\circ\text{C}$, $V_{DD} = 12\text{V}$, $R_L = 8\Omega$, unless otherwise noted.

Symbol	Parameter	Test Condition	Specification			Unit
			Min	Typ.	Max	
$ V_{OS} $	Output offset voltage (measured differentially)	$V_I = 0\text{V}$		1.5	15	mV
I_Q	Quiescent current	$SD_B = 2\text{V}$, No load		30	50	mA
I_{SD}	Shutdown current	$SD_B = 0.8\text{V}$, No load		300	500	μA
t_{ON}	Shutdown turn-on time	$SD_B = 2\text{V}$		20		ms
t_{OFF}	Shutdown turn-off time	$SD_B = 0.8\text{V}$		2		μs
f_{OSC}	Internal oscillation frequency			300		kHz
A	Amplifier gain			26		dB
$R_{DS(ON)}$	Drain-Source ON resistance ¹	$V_{DD} = 12\text{V}$, $I_{OUT} = 500\text{mA}$	High Side	240		$\text{m}\Omega$
			Low Side	240		
V_{REG}	Regulator output	$I_{VREG} = 100\mu\text{A}$, $V_{DD} = 6 \sim 20\text{V}$	5.55	5.75	5.95	V
t_{DC-DET}	DC detect time			450		ms

(1) Design center value.

Operating Characteristics

$V_{DD}=12V$, $T_A = 25^\circ C$ unless otherwise noted.

Symbol	Parameter	Test Condition		Specification			Unit
				Min	Typ.	Max	
P_O	Output power	THD+N=10%, $f=1\text{ kHz}$, $R_L=8\Omega$	$V_{DD} = 18V^1$		16.5		W
			$V_{DD} = 12V$		9.3		
		THD+N=1%, $f=1\text{ kHz}$, $R_L=8\Omega$	$V_{DD} = 18V^1$		12.8		W
			$V_{DD} = 12V$		7.4		
THD+N	Total harmonic distortion plus noise	$V_{DD}=15V$, $P_O=7.5W$, $R_L=8\Omega$, $f=1\text{ kHz}$			0.15		%
$ V_{OS} $	Offset voltage				20		mV
$ K_{SVR} $	Supply ripple rejection ration	Input AC-Grounded, $C_i=1\mu F$, $f=1\text{ kHz}$			68		dB
$ SNR $	Signal-to-Noise ratio	A-weighted, THD+N=1%, $R_L=8\Omega$			93		dB
V_n	Output voltage noise	$C_i=1\mu F$, $f=20\text{ Hz}$ to 20 kHz , No weight, Input AC-Grounded			160		μV_{RMS}
$ CMRR $	Common mode rejection ratio	$V_{DD}=12V$, $V_{IC}=1V_{PP}$	$f=120\text{ Hz}$		66		dB
Z_I	Input impedance				60		k Ω
Crosstalk	Channel separation	$V_O=1W$, $f=1\text{ kHz}$			93		dB

(1) Heat-sink is required.

Functional Descriptions

Gain Setting

The gain of the VA2236 is fixed on 26dB. The input resistance is depended on the gain setting and the nominal input resistance is 30kΩ. Since the gain setting is determined by the ratio of the internal feedback resistive network, the variation of the gain is small. But the absolute value of the input resistance may shift by ±20%. In actual design cases, 80% of nominal value should be assumed as the input resistance of VA2236 in the input network of whole amplifier.

Amplifier Input Impedance

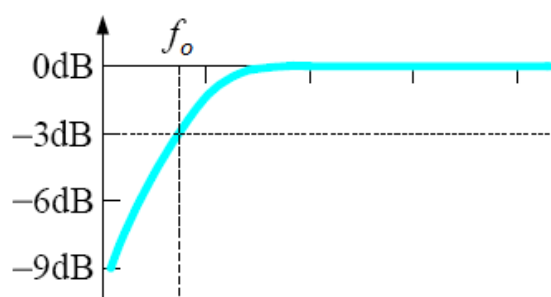


Figure 1. Cut-off point of high-pass filter

In most cases, no extra resistor needs to be added on the input of VA2236. The actual input resistor is already determined with the gain. If a single capacitor is used in the input high-pass filter, the cut-off frequency f_o may vary with the change of gain setting. The -3dB point of the cut-off frequency can be calculated by the following equation,

$$f_o = \frac{1}{2\pi \times R_I \times C_I}$$

,where the R_I values is fixed at 30kΩ.

Shutdown Operation

The VA2236 employs a state of shutdown mode to

reduce supply current to the absolute minimum level during periods of nonuse for power conservation. This terminal should be held high during normal operation when the amplifier is in normal operating. Pulling low causes the output drivers shutdown and the amplifier to enter a low-current state. Do not leave it unconnected, because there is no weakly pulling resistor inside the amplifier.

Remember that to place the amplifier in the shutdown state prior to removing the power supply voltage so that power-off pop noise can be eliminated.

VREG Supply

The V_{REG} Supply is used to bias the gates of the output full-bridge upper half MOSFETs. It could be used to supply the PLIMIT pin and related voltage divider circuit. Add at least 1 μF capacitor to ground at this pin.

Speaker Protection

Due to the nature of Class D amplifiers, the speakers may have DC current if the audio inputs get DC voltage in any case. An output DC fault will shut down the audio amplifier and change the state of output into high impedance and the amplifier will be auto recovery again.

To resolve the case of DC input, it is good to treat it as very low frequency sine wave much lower than audio band such as 2Hz. Based on this criteria, a DC detect fault shall be issued when the output differential duty-cycle of either channel exceeds 14% for more than 500ms at the same polarity. This feature protects the speakers away from large currents.

The minimum differential input DC voltages re-

Functional Descriptions (cont.)

quired to trigger the DC detection fault is 56mV.

To resume the normal operation, it is necessary to power off the amplifier and then power on, cycling SD_B can not resume normal operation.

Short Circuit Protection

VA2236 has protection from over-current conditions caused by a short circuit on the output stage. The amplifier outputs are switched to a high impedance state when the short circuit protection latch is engaged. The VA2236 will attempt to power-on again and the fault will be auto recovery if the short issue has been resolved.

Thermal Protection

Thermal protection on the VA2236 prevents damage to the device when the internal die temperature exceeds 150°C. There is a $\pm 20^{\circ}\text{C}$ tolerance on this trip point from device to device. Once the die temperature exceeds the thermal set point, the device enters into the shutdown state and the outputs are disabled. This is not a latched fault. The thermal fault is cleared once the temperature of the die is reduced by 30°C. VA2236 will be back to normal operation at this point with no external system interaction.

Application Information

Output Filter

Many applications require a ferrite bead filter at least. The ferrite filter reduces EMI above 30MHz. When selecting a ferrite bead, choose one with high impedance at high frequencies, but low impedance at low frequencies, be aware of its maximum current limitation. The VA2236 has built-in adapted modulation scheme for better EMI performance.

Use an LC output filter if there are low frequency (<1 MHz) EMI sensitive circuits and there are long wires from the amplifier to the speaker.

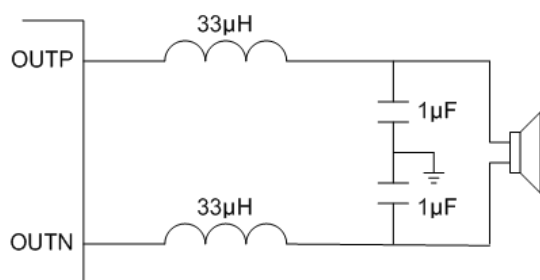


Figure 2. Typical LC Output Filter, Speaker Impedance=8Ω

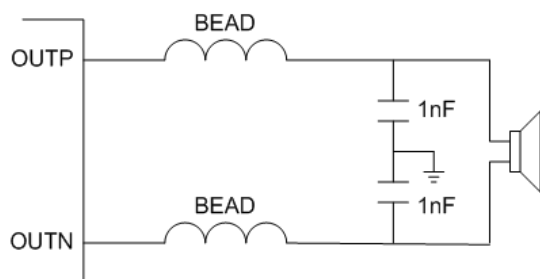


Figure 3. Typical Ferrite Chip Bead Output Filter

Inductors used in LC filters must be selected carefully. A significant change in inductance at the peak output current of the VA2236 will cause increased distortion. The change of inductance at currents up to the peak output current must be less than 0.1 µH per amp to avoid this. Also note that smaller inductors than 33µH may cause an increase in distortion above what is shown in preceding graphs of

THD versus frequency and output power. In all cases, avoid using inductors which value are less than 22µH.

Like the selection of the inductor in LC filters, the capacitor must be selected carefully, too. A significant change in capacitance at the peak output voltage of the VA2236 will cause increased distortion. LC filter capacitors should be double of DC voltage ratings of the peak application voltage (the power supply voltage) at least. In general, it is strongly recommended using capacitors with good temperature performance like X5R series.

Output Snubbers

In Figure 4, the 330pF capacitors in series with 10Ω resistors connected with the outputs of the VA2236 are snubber circuits. They smooth switching transitions and reduce overshoot and ringing. With these networks, THD+N can be improved at lower power levels and EMC can be reduced 2~4 dB at middle frequencies. They increase quiescent current by 3mA~11 mA depending on supply voltage.

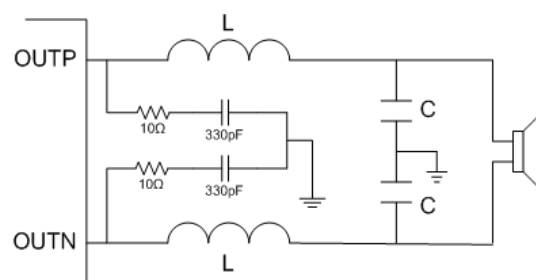


Figure 4. Output Snubber Circuits

Low ESR Capacitors

Low ESR capacitors are highly recommended for this application. In general, a practical capacitor can be modeled simply as a resistor in series with an ideal capacitor. The voltage drop across this unwanted

Application Information (cont.)

resistor can eliminate the effects of the ideal capacitor. Place low ESR capacitors on supply circuitry can improve THD+N performance.

Boot-Strap Capacitors

The full H-bridge output stages use only MOS transistors. Therefore, they require bootstrap capacitors for the high side of each output to turn on correctly. A 0.22 μ F ceramic capacitor, rated for at least 25V, must be connected from each output to its corresponding boot-strap input. Specifically, one 0.22 μ F capacitor must be connected from xOUTP to BSPx, and one 0.22 μ F capacitor must be connected from xOUTN to BSNx.

The bootstrap capacitors connected between the BSPx or BSNx pins and corresponding output function as a floating power supply for the high side N-channel power MOSFET gate drive circuitry. During each high side switching cycle, the bootstrap capacitors hold the gate-to-source voltage high enough to keep the high-side MOSFETs turned on.


Decoupling Capacitors

VA2236 requires appropriate power decoupling to minimize the output total harmonic distortion (THD) and improves EMC performance. Power supply decoupling also prevents intrinsic oscillations for long lead lengths between the amplifier and the speaker. The optimum decoupling can be achieved by using two different types of capacitors which target different types of noise on the power supply lines. For higher frequency spikes, or digital hash on the rail, a good low ESR ceramic capacitor, for example 0.1 μ F to 10 μ F, placed as close as possible to PVDDR and PVDDL pins works best. For filtering lower frequency noise, a larger low ESR aluminum electrolytic capacitor of 470 μ F or greater placed near the audio power amplifier is suggested. The

470 μ F capacitor also serves as local storage capacitor for supplying current during heavy power output on the amplifier outputs. The PVDDR and PVDDL terminals provide the power to the output transistors, so a 470 μ F or larger capacitor should be placed by PVDDR and PVDDL terminals as near as possible. A 10 μ F ceramic capacitor on each PVDDR/PVDDL terminal is also recommended.

Typical Characteristic

Test Setup Connection Diagram

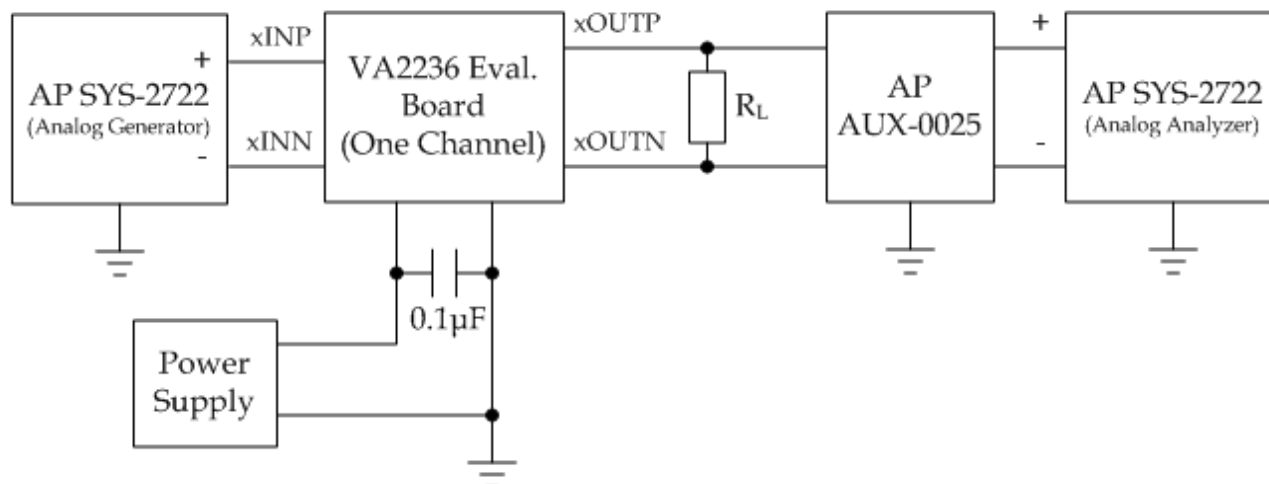


* Remove all L/C (BEAD) filter components on board before performing all measurements.


** Connection diagram is for one-channel configuration.

Typical Characteristic (cont.)


THD+N vs. Output Power, 8Ω load (BTL)

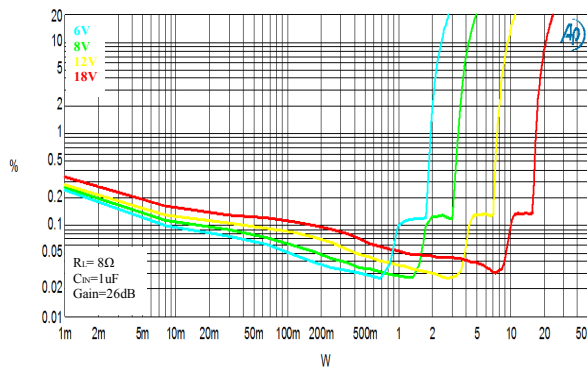


THD+N vs. Output Power, 4Ω load (BTL)

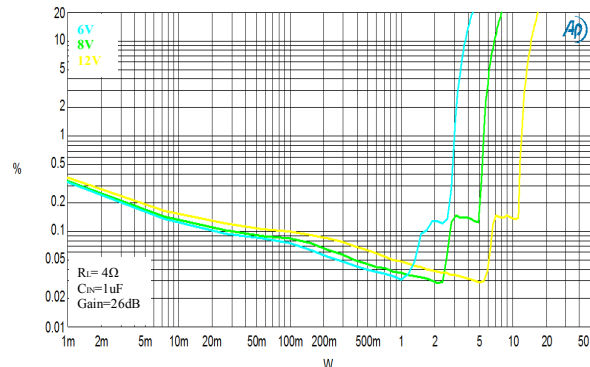


THD+N vs. Output Power, 4Ω load A (PBTL)

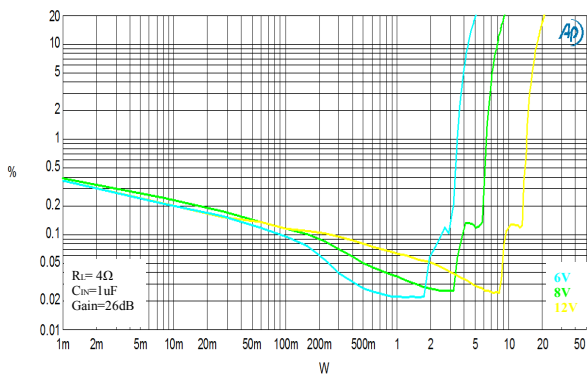


Cross-Talk, 12V, 4Ω load (BTL)

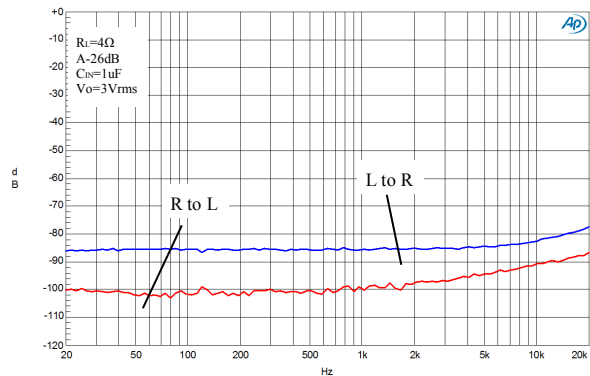


Noise, 12V, 8Ω load (BTL)

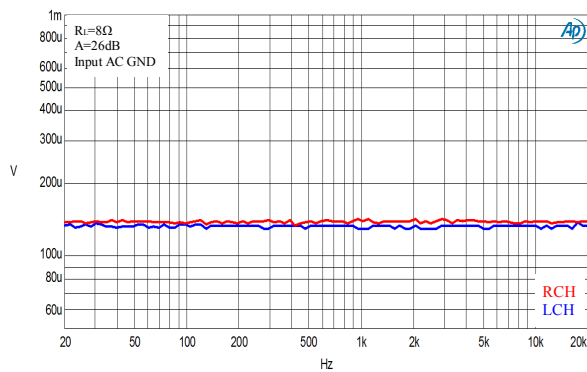


Noise, 12V, 4Ω load (BTL)

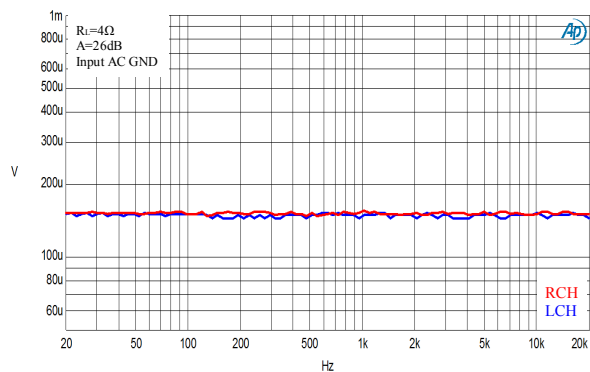

THD + N (%) vs. Frequency, 12V, 8Ω load (BTL)

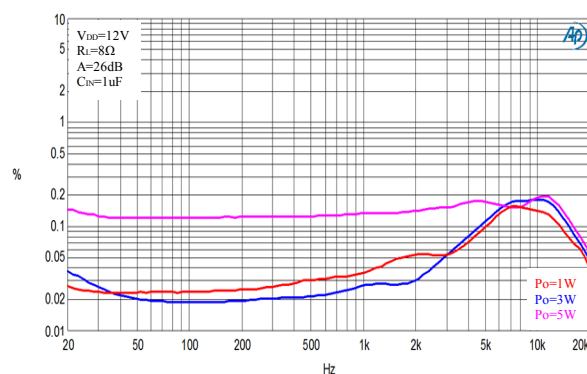


THD + N (%) vs. Frequency, 12V, 4Ω load (BTL)

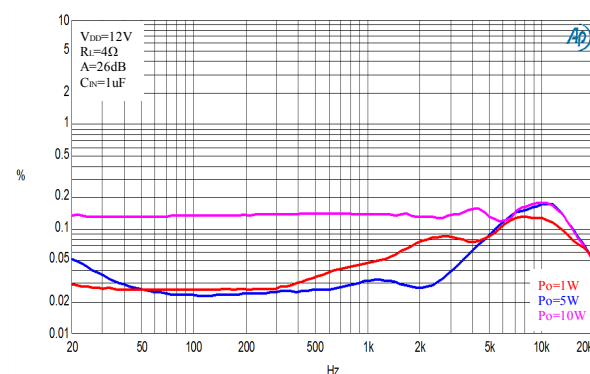


Typical Characteristic (cont.)


Frequency Response, 12V, 8Ω load (BTL)

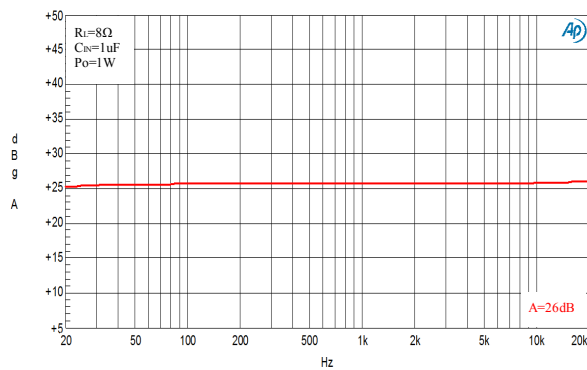


Frequency Response, 12V, 4Ω load (BTL)

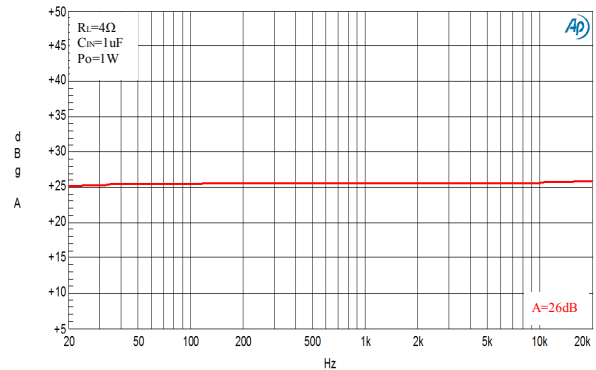


Frequency Response, 12V, 4Ω load (PBTl)

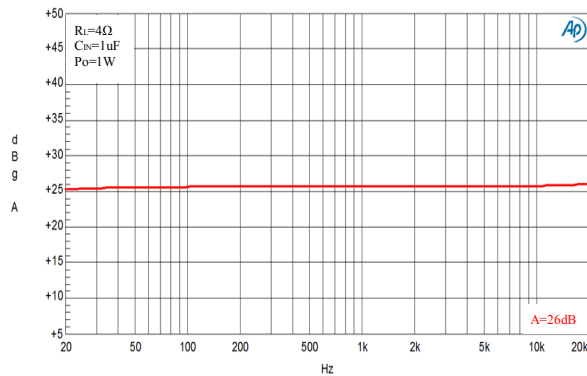


THD+N vs. Freq. vs. Po, 12V, 8Ω load (BTL)

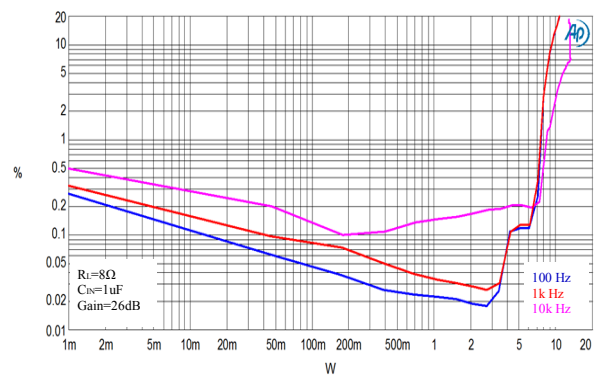


THD+N vs. Freq. vs. Po, 12V, 4Ω load (BTL)

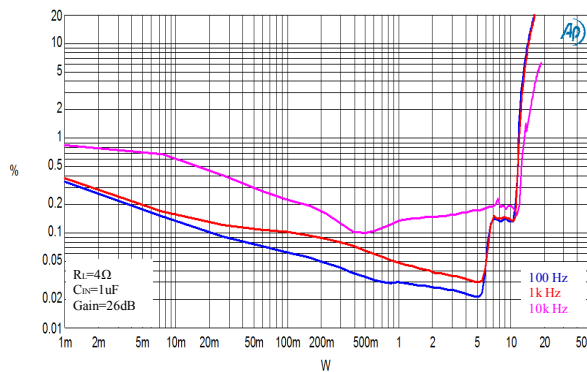

Efficiency, 4Ω load / 2ch (BTL)

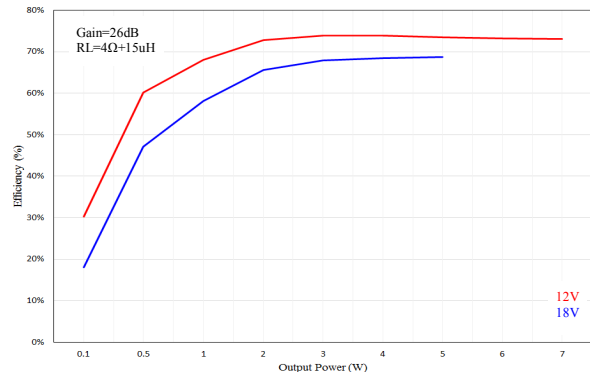

Efficiency, 8Ω load / 2ch (BTL)

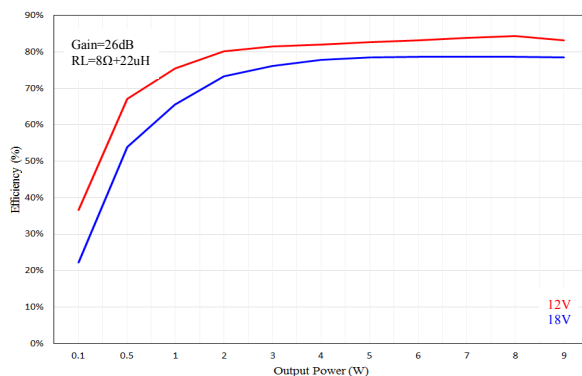

Application Circuit

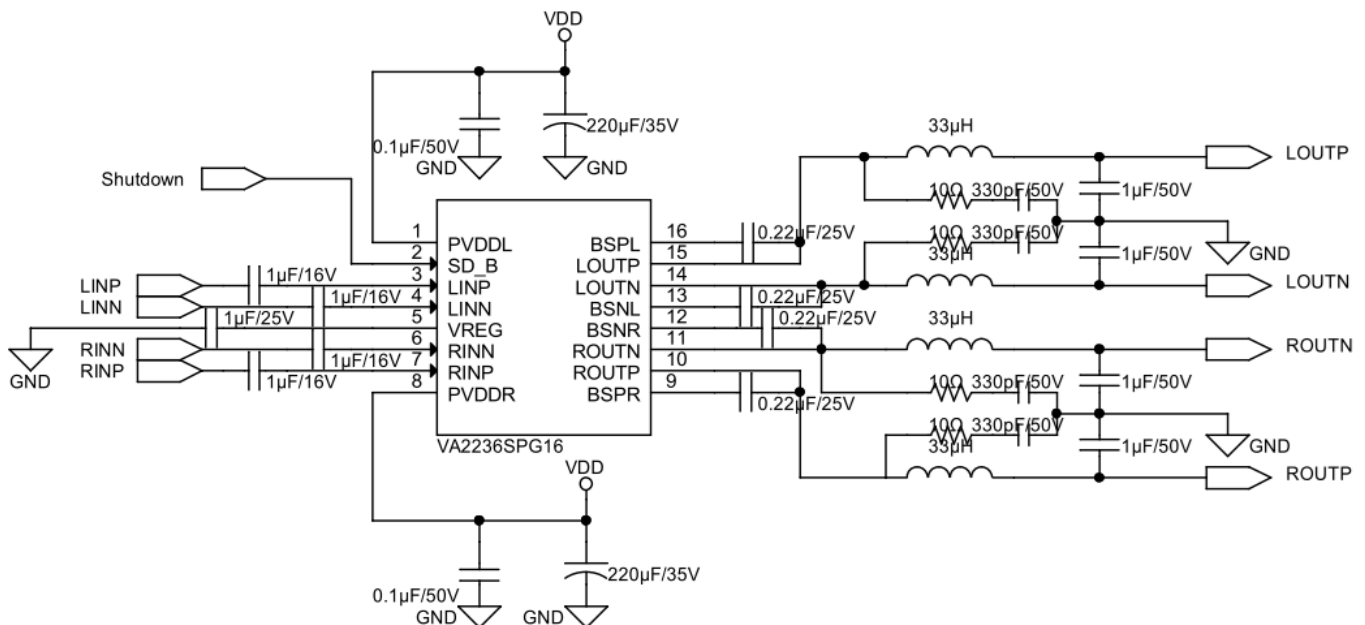


Figure 5. VA2236 Stereo Reference Application with LC Filter


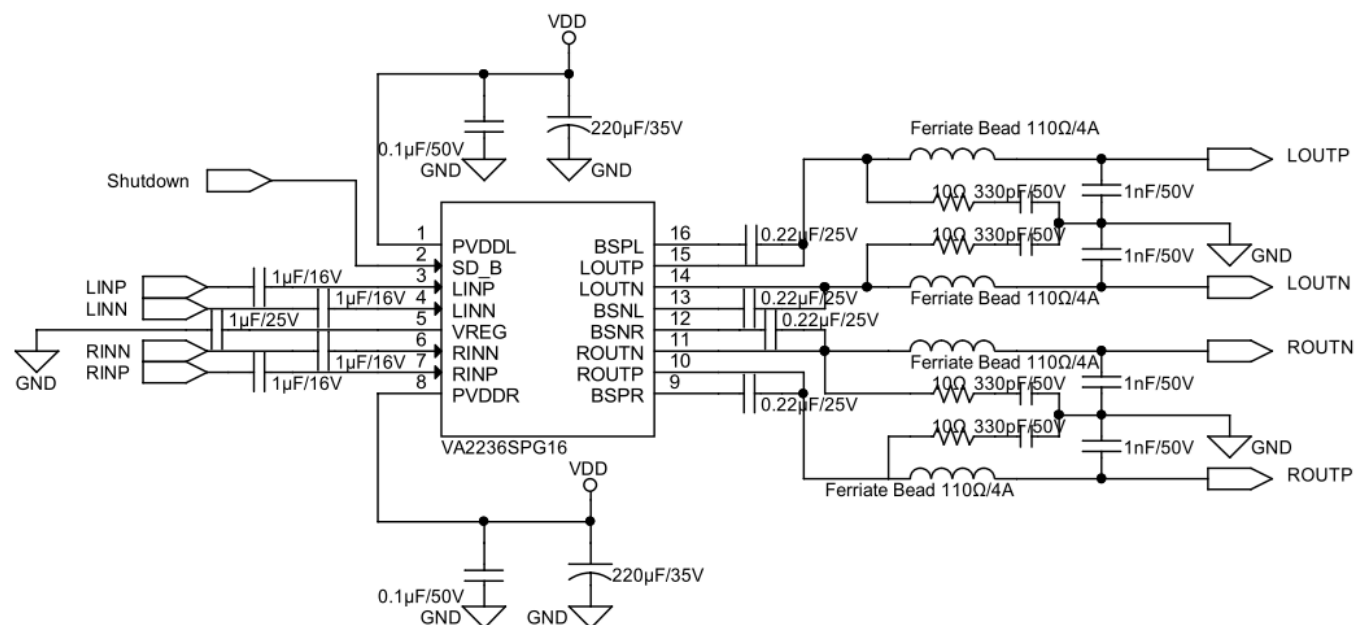


Figure 6. VA2236 Stereo Reference Application with Ferrite Bead

Package Information

SO-16P

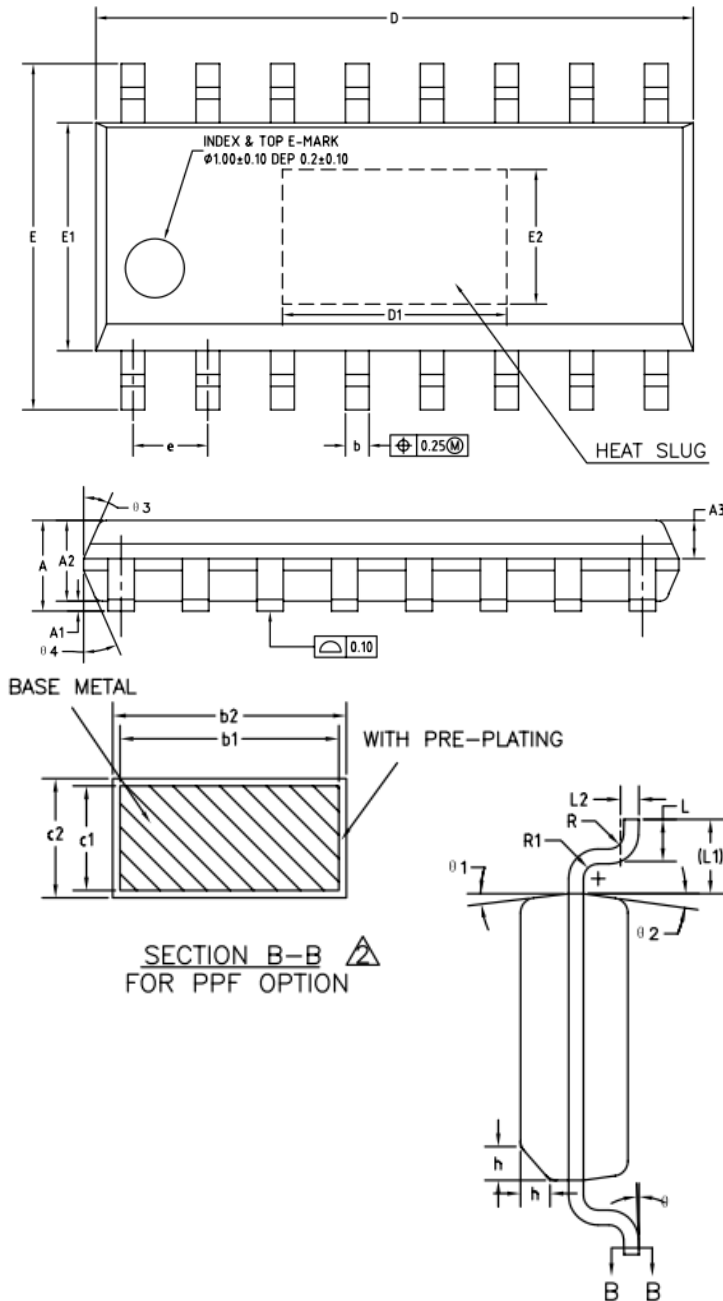


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	1.35	1.52	1.70
A1	0.02	0.07	0.12
A2	1.35	1.45	1.55
A3	0.55	0.65	0.75
b	0.38	—	0.47
b1	0.37	0.40	0.43
b2	0.371	—	0.44
c	0.20	—	0.25
c1	0.19	0.20	0.21
c2	0.191	—	0.22
D	9.86	9.96	10.06
D1	OPTION1 OPTION2	3.30 3.70	3.81 4.06
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
E2	OPTION1 OPTION2	1.78 1.70	2.29 2.08
e	1.17	1.27	1.37
L	0.45	0.60	0.80
L1	1.04REF		
L2	0.25BSC		
R	0.07	—	—
R1	0.07	—	—
h	0.30	0.40	0.50
θ	0°	—	8°
θ 1	6°	8°	10°
θ 2	6°	8°	10°
θ 3	5°	7°	9°
θ 4	5°	7°	9°

Notes:

- Package Outline Unit Description:
BSC: Basic. Represents theoretical exact dimension or dimension target.
MIN: Minimum dimension specified.
MAX: Maximum dimension specified.
REF: Reference. Represents dimension for reference use only. This value is not a device specification.
NOM: Nominal. Provided as a general value. This value is not a device specification.
- Dimensions in Millimeters.
- JEDEC Outline : MS-012 BC
- Dimensions "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusions and gate burrs shall not exceed 0.51mm per side.
- Dimensions "E" does not include inter-lead flash, or protrusions. Inter-lead flash and protrusions shall not exceed 0.25mm per side.

Ordering Information

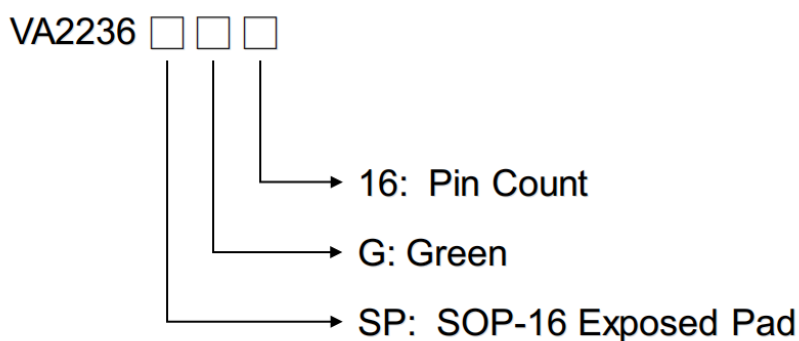

Part No.	Q`ty/Reel
VA2236SPG16	2,500

Contact Information

Viva Electronics Incorporated

10F-1, No. 32, Gaotie 2nd Rd., Zhubei City, Hsinchu County, Taiwan, R.O.C.

Tel: 886-3-6579508

Fax: 886-3-6579509

WWW: <http://www.viva-elec.com.tw>

Sales: sales@viva-elec.com.tw

FAE Support: fae@viva-elec.com.tw

IMPORTANT NOTICE

Viva Electronics Incorporated reserves the right to make changes without further notice to any products or specifications herein. Viva Electronics Incorporated does not assume any responsibility for use of any its products for any particular purpose, nor does Viva Electronics Incorporated assume any liability arising out of the application or use of any its products or circuits. Viva Electronics Incorporated does not convey any license under its patent rights or other rights nor the rights of others.