项目	零件名称	数量	材质	处理/备注
1	SHELL	1	STAINLESS	NI: 50u"
2	Molding HOUSING	2	L.C.P	(Black)
3	GND SPRING	2	STAINLESS	NI: 50u"
4	Insert molding 12PIN	2	L.C.P	(Black)
5	CONTACT	24	COPPER ALLOY	Contact area: gold flash, Solder tails: Tin100u", Ni: 50u"
6	PCB	1	--	--

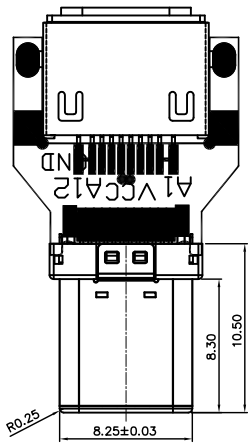



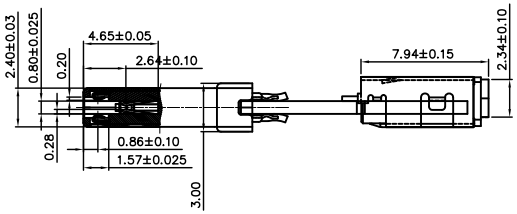



;SPECIFICATION
MATERIAL
See drawing
STANDARD DATA
Operating temperature: -10°C ~ +60°C
Storage temperature: -20°C ~ +85°C
ELECTRICAL
Insulator resistance: 100Mohms Min.
Withstanding voltage: 100 VAC / minute
Contact resistance: initial 40mohms Max;
after 50mohms Max.
MECHANICAL
Mating force: 5~20N
Unmating force : 8~20N
Durability: 5000 cycles Min.

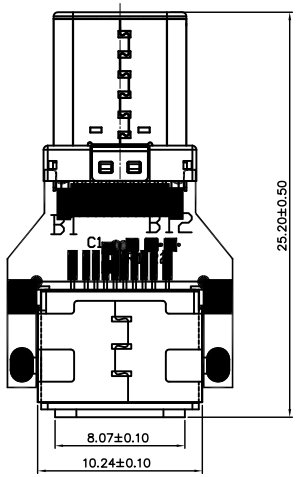

产品图 PRODUCT CHART DWG									
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	
X.	±0.25	X°.	±5°	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	USB-3.1 公头/双面PCP板转15母头
.X	±0.20	.X°	±2°						
.XX	±0.15	.XX°	±1°	日期 DATE	2015.07.14	核准 APPD		角法 VIEW	版本 VER A0
.XXX	±0.10	.XXX°	±0.5°						