


Multilayer Ceramic Devices (Diplexers)

FI212P0829G2-T

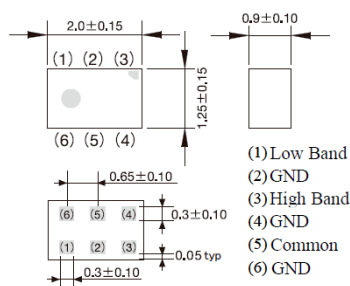

Unit:mm

■ Features

- Item Summary
Diplexer, 2.0x1.25x0.9mm
for W-CDMA/CDMA/GSM/LTE/ISM900
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping Embossed 3000

■ Products characteristics table

System	W-CDMA/CDMA/GSM/LTE /ISM900
Frequency1	Low band
Passband Frequency1 (f1)	698 to 960 MHz
Insertion Loss2 (max)(in f1)	0.32 dB at 698 to 960MHz (-40 to +85 °C)
VSWR1 (max)(in f1)	2 at 698 to 960MHz
Attenuation1 (min)(f1)	13 dB at 1710 to 2690MHz
Frequency2	High band
Passband Frequency2 (f2)	1710 to 2690 MHz
Insertion Loss2 (max)(in f2)	0.55 dB at 1710 to 2690MHz (-40 to +85 °C)
VSWR1 (max)(in f2)	2 at 1710 to 2690MHz
Attenuation1 (min)(f2)	19 dB at 698 to 960MHz
Input Impedance	50 Ω
Output Impedance	50 Ω
Operating Temp. Range	-40 to +85 °C
RoHS2 Compliance (10 subst.)	Yes
REACH Compliance (168 subst.)	Yes
Soldering	Reflow

■ External Dimensions

Dimension L	2.0 ± 0.15 mm
Dimension W	1.25 ± 0.15 mm
Dimension T	0.9 ± 0.10 mm

2016.12.03

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.