ROHS

http://www.smtswitch.com

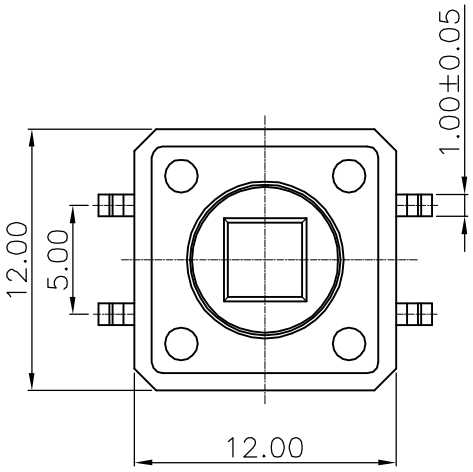

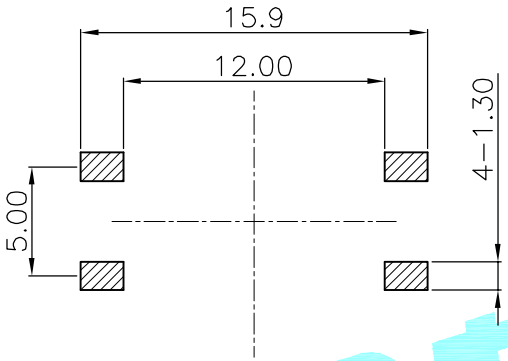

PCB Layout(Pattern side)



Circuit Diagram

Typical Specifications :
1. Rating : DC 12V 50mA
2. Life:100,000 Cycles Min.

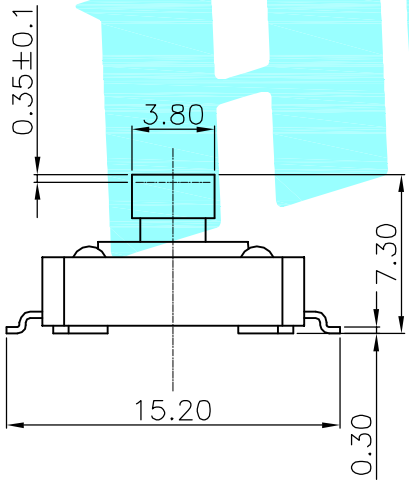

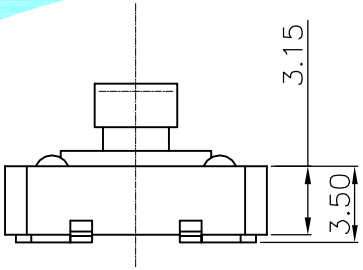

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4-NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	——	4	Brass(0.3t)	Plating silver	——
④	Contact	——	1	F.Ag/C5210	——	——
③	Base	——	1	Nylon	Black	UL94V-0
②	Cover	——	1	SPCC	Plating Sn	——
①	Keystoke	——	1	Nylon	Black	UL94V-0

APPROVALS		DATE	HRO韩荣® ELECTRONICS CO.,LTD
DRAWN	xu qi feng	2014.11.26	
CHECKED			TITLE: TACT SWITCHS
APPROVALS			PART NO. K2-1103ST-A□□W-□□

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以下	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.	——	SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——