

## TO-220-3L Plastic-Encapsulate Thyristors

### BT136 TRIAC


#### MAIN FEATURES

Symbol	value	unit
$I_{T(RMS)}$	6	A
$V_{DRM}/V_{RRM}$	600	V
$I_{TSM}$	25	A

#### GENERAL DESCRIPTION

Glass passivated triacs in a plastic envelope , intended for use in applications requiring high bidirectional transient and blocking voltage capability and high thermal cycling performance.

.Typical applications include motor control, industrial and domestic lighting , heating and static switching.

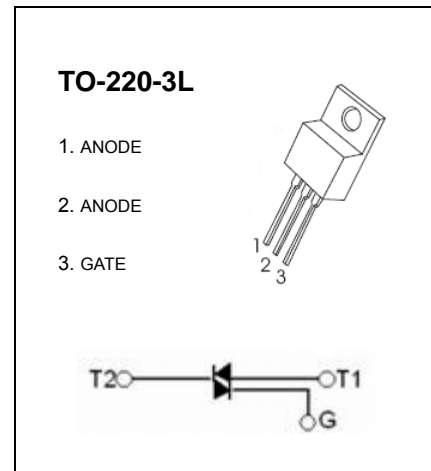


#### ABSOLUTE MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

symbol	parameter			value	unit
$I_{T(RMS)}$	RMS on-state current (full sine wave)	D <sup>2</sup> PAK/TO-220	T <sub>c</sub> =107°C	6	A
$I_{TSM}$	Non repetitive surge peak on-state current (full sine wave, T <sub>j</sub> =25°C)	t=20ms		25	A
		t=16.7ms		27	
$I_{GM}$	Peak gate current			2	A
$P_{G(AV)}$	Average gate power dissipation		T <sub>j</sub> =125°C	0.5	W
T <sub>stg</sub>	Storage junction temperature range			-40 to +150	°C
T <sub>j</sub>	Operating junction temperature range			-40 to +125	

#### ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter		Symbol	Test conditions	Min	Max	Unit
Rated repetitive peak off-state/reverse voltage		$V_{DRM}, V_{RRM}$	$I_D=10\mu A$	600		V
Rated repetitive peak off-state current		$I_{DRM}, I_{RRM}$	$V_D=620V$		10	$\mu A$
On-state voltage		$V_{TM}$	$I_T=5A$		1.7	V
Gate trigger current	I	$I_{GT}$	T <sub>2</sub> (+), G(+)	$V_D=12V$ $R_L=100\Omega$	10	mA
	II		T <sub>2</sub> (+), G(-)		10	mA
	III		T <sub>2</sub> (-), G(-)		10	mA
	IV		T <sub>2</sub> (-), G(+)		-	mA
Gate trigger voltage	I	$V_{GT}$	T <sub>2</sub> (+), G(+)	$V_D=12V$ $R_L=100\Omega$	1.45	V
	II		T <sub>2</sub> (+), G(-)		1.45	V
	III		T <sub>2</sub> (-), G(-)		1.45	V
	IV		T <sub>2</sub> (-), G(+)		-	V
Holding current		$I_H$	$I_T=100mA$ $I_G=20mA$		20	mA

# TO-220-3L Package Outline Dimensions

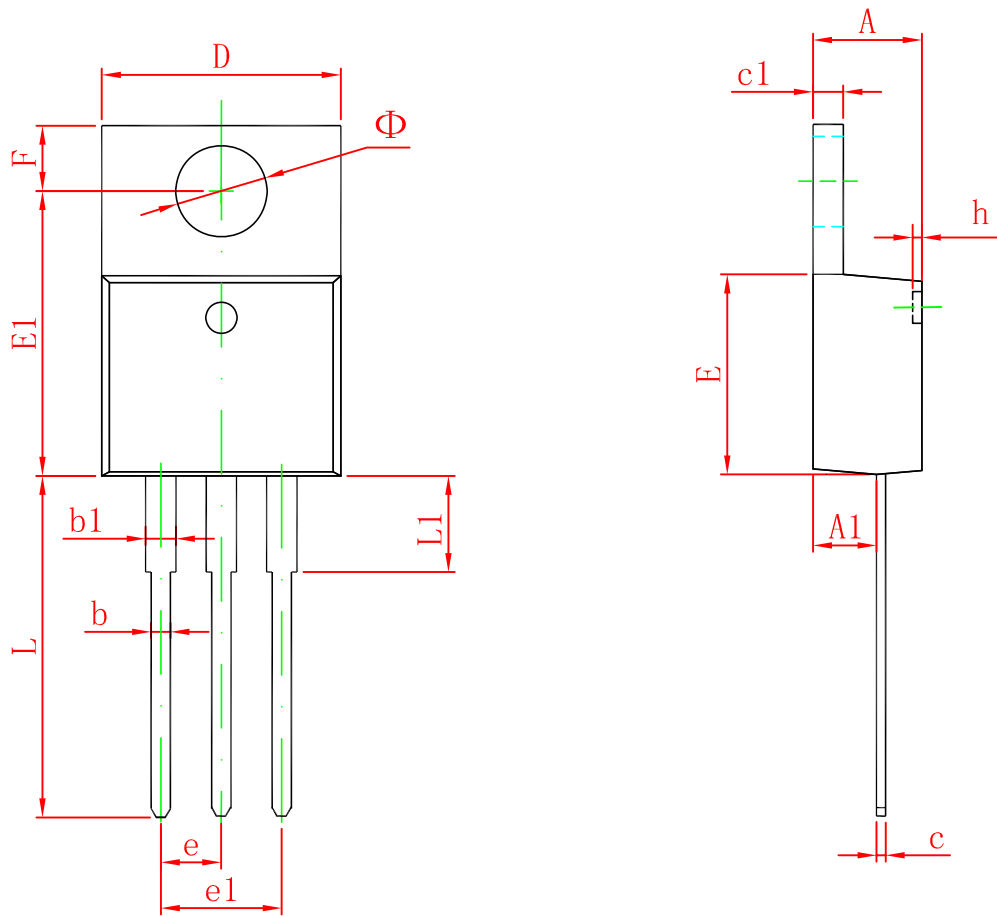

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
$\Phi$	3.735	3.935	0.147	0.155