



# EV2665A-QB-00A

## 21V, 1A, Linear Charger for Single-Cell Li-Ion Batteries with Power Management Evaluation Board

### DESCRIPTION

The EV2665A-QB-00A is an evaluation board designed to demonstrate the capabilities of the MP2665A, a highly integrated, single-cell Li-ion/Li-polymer battery charger with system power path management. The MP2665A is ideal for space-constrained portable applications. It takes input power from either an AC adapter or a USB port to supply the system load and charge the battery simultaneously. It also features pre-charge, constant current (CC) fast charge, constant voltage (CV) regulation, charge termination, and auto-recharge.

The MP2665A ensures that the system is continuously powered by automatically selecting the input, the battery, or both to power the system.

It provides system short-circuit protection (SCP) to prevent the Li-ion battery from being damaged due to excessively high currents.

The MP2665A also provides an on-chip battery under-voltage lockout (UVLO) threshold that cuts off the path between the battery and the system if the battery voltage drops below the configurable UVLO threshold. This prevents the Li-ion battery from being overly discharged.


The integrated I<sup>2</sup>C interface can configure the following charging parameters: input current limit, input voltage regulation limit, charging current, battery regulation voltage, safety timer, and battery UVLO threshold. The MP2665A is available in a QFN-12 (2.5mmx3mm) package.

### PERFORMANCE SUMMARY

Specifications are at T<sub>A</sub> = 25°C, unless otherwise noted.

| Parameters                             | Conditions | Value          |
|----------------------------------------|------------|----------------|
| Input voltage (V <sub>IN</sub> ) range |            | 4.35V to 5.5V  |
| Battery voltage (V <sub>BATT</sub> )   |            | 3.6V to 4.545V |
| Fast charge current (I <sub>CC</sub> ) |            | 16mA to 896mA  |
| Input current limit                    |            | 50mA to 1000mA |
| Minimum V <sub>IN</sub> regulation     |            | 3.88V to 5.08V |

### EVALUATION BOARD

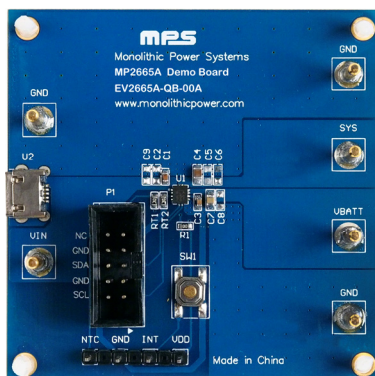

LxWxH (6.3cmx6.3cmx0.16cm)  
2 Layers, 1oz/1oz


| Board Number   | MPS IC Number   |
|----------------|-----------------|
| EV2665A-QB-00A | MP2665AGQB-xxxx |

## QUICK START GUIDE

The EV2665A-QB-00A evaluation board is designed to demonstrate the capabilities of the MP2665A, a highly integrated, single-cell Li-ion/Li-polymer battery charger with system power path management. The EV2665A-QB-00A's layout accommodates most commonly used capacitors. The default function of this board is preset for charger mode, and the full-charge voltage is preset to 4.2V for single-cell Li-ion batteries.


### Evaluation Platform Preparation:

1. To use the evaluation platform, the following is required: a computer with at least one USB port, a USB cable, and a USB-to-I<sup>2</sup>C communication kit (EVKT-USBI2C-02) (see Figure 1).

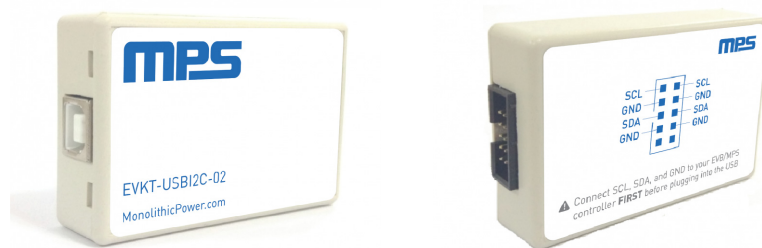

**Figure 1: USB-to-I<sup>2</sup>C Communication Kit**

2. The MP2665A programming tool software must also be properly installed. This software can be downloaded from the MPS website.

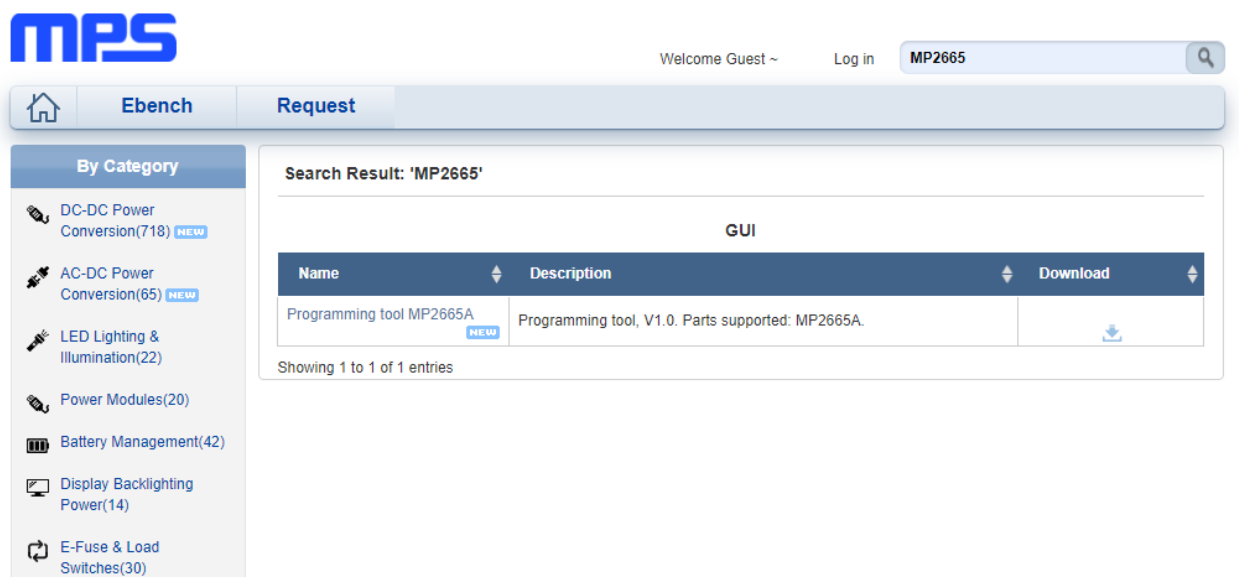


**Figure 2: MP2665A Programming Tool on eBench**

3. Figure 3 on page 3 shows the original test set-up for the MP2665A.
  - a. Connect the input voltage ( $V_{IN} = 5V$ ) and the input ground to the VIN and GND pins, respectively.
  - b. Connect the load terminals to:
    - Positive (+): SYS
    - Negative (-): GND

c. Connect the battery ( $V_{BATT} = 3V$  to  $4.2V$ ) terminals to:

- Positive (+): BATT
- Negative (-): GND

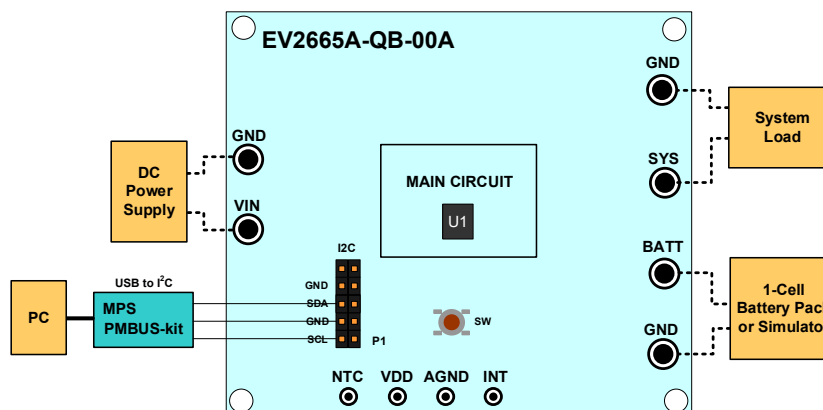

**Figure 3: Test Set-Up for the MP2665A**

4. Turn on the computer and launch the MP2665A evaluation software. Figure 4 shows the main window of the software.



**Figure 4: MP2665A Evaluation Interface**

## PROCEDURE


Ensure that all the connections (e.g. between the USB-to-I<sup>2</sup>C communication kit and the EV2665A-QB-00A) are successful.

- Figure 5 shows the default values of the charger function.




**Figure 5: Charger Function**

- Figure 6 shows the minimum V<sub>IN</sub> setting. Set the minimum V<sub>IN</sub> to 4.36V (the range is 3.88V to 5.08V).

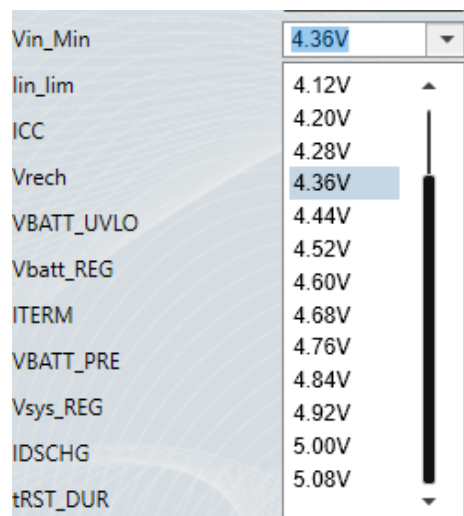


**Figure 6: Minimum V<sub>IN</sub> Setting**

3. Figure 7 shows the input current limit setting. Set the input current limit to 940mA (the range is 50mA to 1000mA).

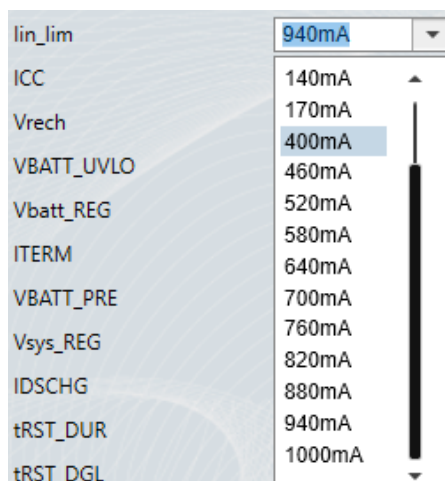


**Figure 7: Input Current Limit Setting**

4. Figure 8 shows the fast charge current setting. Set the fast charge current to 224mA (the range is 16mA to 896mA).

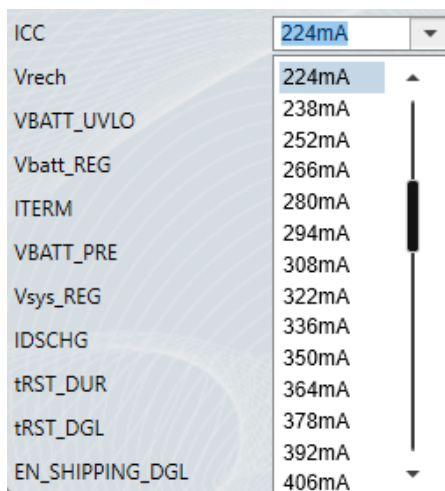


**Figure 8: Fast Current Charge Setting**

5. Figure 9 shows the BATT\_UVLO threshold setting. Set the BATT\_UVLO threshold to 2.76V (the range is 2.4V to 3.03V).

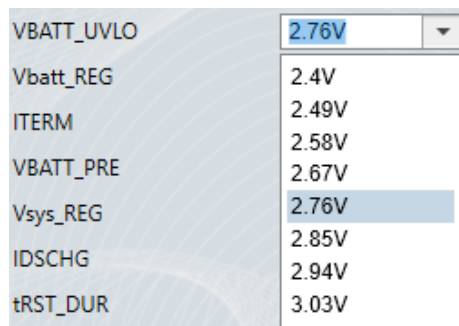


**Figure 9: BATT\_UVLO Threshold Setting**

6. Figure 10 shows the charge termination current setting. Set the charge termination current to 7.5mA (the range is 2.5mA to 62mA).

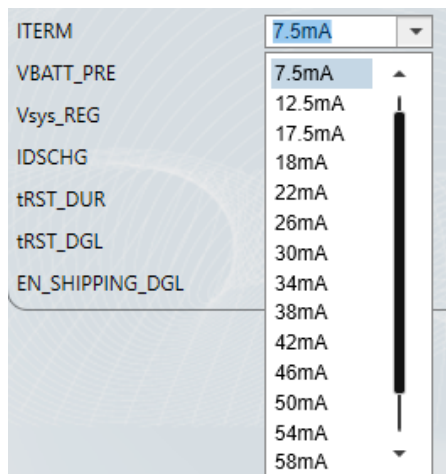


**Figure 10: Charge Termination Current Setting**

7. Figure 11 shows the battery regulation voltage setting. Set the battery regulation voltage to 4.2V (the range is 3.6V to 4.545V).

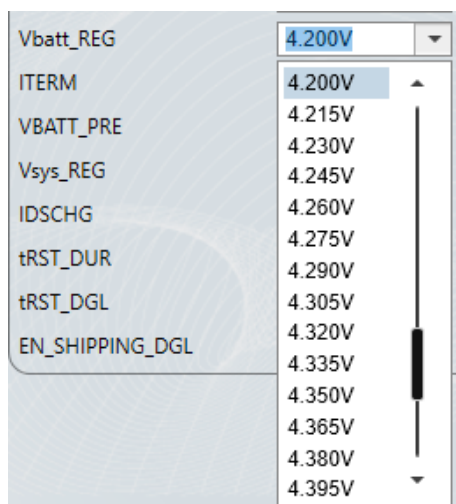


**Figure 11: Battery Regulation Voltage Setting**

8. Figure 12 shows the pre-charge to fast charge threshold setting. Set the pre-charge to fast charge threshold voltage to 3V (the range is 2.8V to 3V).

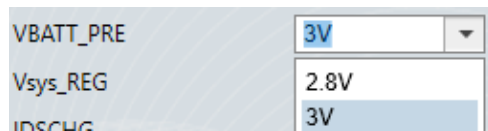


**Figure 12: Pre-Charge to Fast Charge Threshold Setting**

9. Figure 13 shows the battery auto-recharge voltage setting. Set the battery auto-recharge voltage to VBAT\_REG to 200mV (the range is 100mV to 200mV).

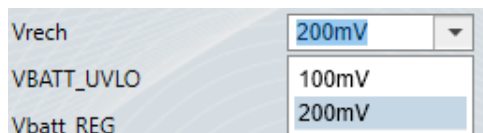


**Figure 13: Battery Auto-Recharge Voltage Setting**

10. Figure 14 shows the battery discharge current limit. Set the battery discharge current limit to 3200mA (the range is 400mA to 3200mA).

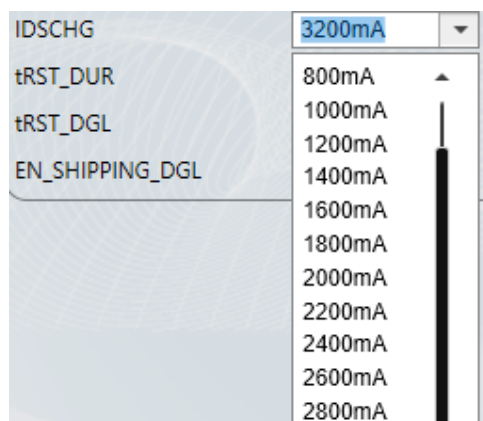

**Figure 14: Battery Discharge Current Limit**

11. Figure 15 shows the INT control setting.

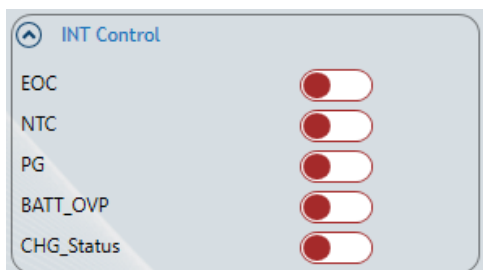

**Figure 15: INT Control Setting**

12. Figure 16 on page 8 shows the FET control setting.
- EN\_HIZ controls the low-dropout (LDO) FET's on/off function.
  - CEB controls the Battery FET's on/off function in charge mode.
  - Select FET\_DIS to turn off the Battery FET in both the charge and discharge modes.
  - De-selecting FET\_DIS cannot turn on the battery FET. Use the push button or plug in the input adapter for 2 seconds to pull INT low, which turns on the battery FET when it is turned off by FET\_DIS.

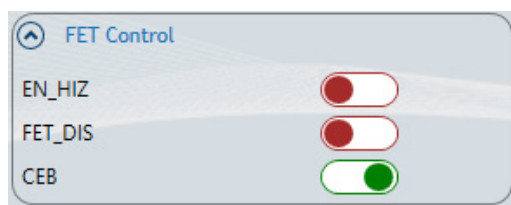


Figure 16: FET Control Setting

13. Figure 17 shows the VIN\_LOOP control setting.



Figure 17: VIN\_LOOP Control Setting

14. Figure 18 shows the battery FET time setting.



Figure 18: Battery FET Time Setting

15. Figure 19 shows the thermal control setting to enable PCB over-temperature protection (OCP).

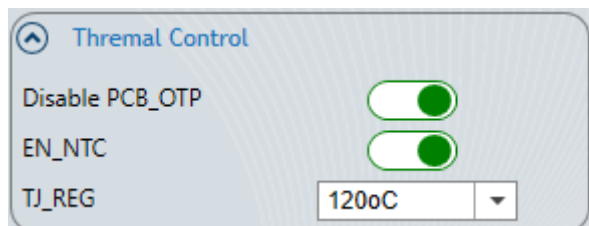


Figure 19: Thermal Control Setting

For other applications, see Table 1 for the NTC function selection.

Table 1: NTC Function Selection

| I <sup>2</sup> C Control |                  | Function |
|--------------------------|------------------|----------|
| EN_NTC                   | EN_PCB OTP       |          |
| 0                        | X <sup>(1)</sup> | Disabled |
| 1                        | 1                | NTC      |
| 1                        | 0                | PCB OTP  |

**Notes:**

1) "x" means not applicable.

16. Figure 20 shows the safety timer setting.


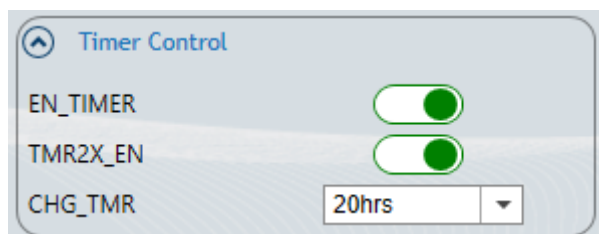


Figure 20: Safety Timer Setting

17. Figure 21 shows the I<sup>2</sup>C watchdog timer setting.

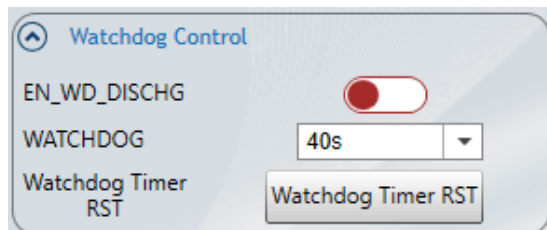


**Figure 21: I<sup>2</sup>C Watchdog Timer Setting**

18. Figure 22 shows the content of the registers.

| CONFIG       |              | REGISTER MAP       |                    |
|--------------|--------------|--------------------|--------------------|
| Command code | Command name | Register Vaule(0x) | Register Vaule(0b) |
| 00H          | 00H          | 6E                 | 0110 1110          |
| 01H          | 01H          | AC                 | 1010 1100          |
| 02H          | 02H          | 0F                 | 0000 1111          |
| 03H          | 03H          | F1                 | 1111 0001          |
| 04H          | 04H          | A3                 | 1010 0011          |
| 05H          | 05H          | 38                 | 0011 1000          |
| 06H          | 06H          | C0                 | 1100 0000          |
| 07H          | 07H          | B9                 | 1011 1001          |
| 08H          | 08H          | 40                 | 0100 0000          |
| 09H          | 09H          | 00                 | 0000 0000          |
| 0AH          | 0AH          | 00                 | 0000 0000          |
| 0BH          | 0BH          | 20                 | 0010 0000          |


**Figure 22: Content of the Registers**

19. Figure 23 shows the MP2665A's operation status and fault report.

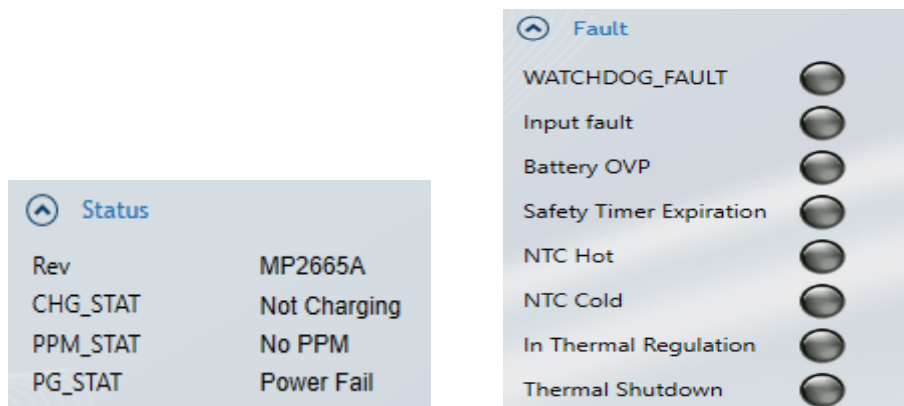

**Figure 23: MP2665A Operation Status and Fault Report**

## EVALUATION BOARD SCHEMATIC

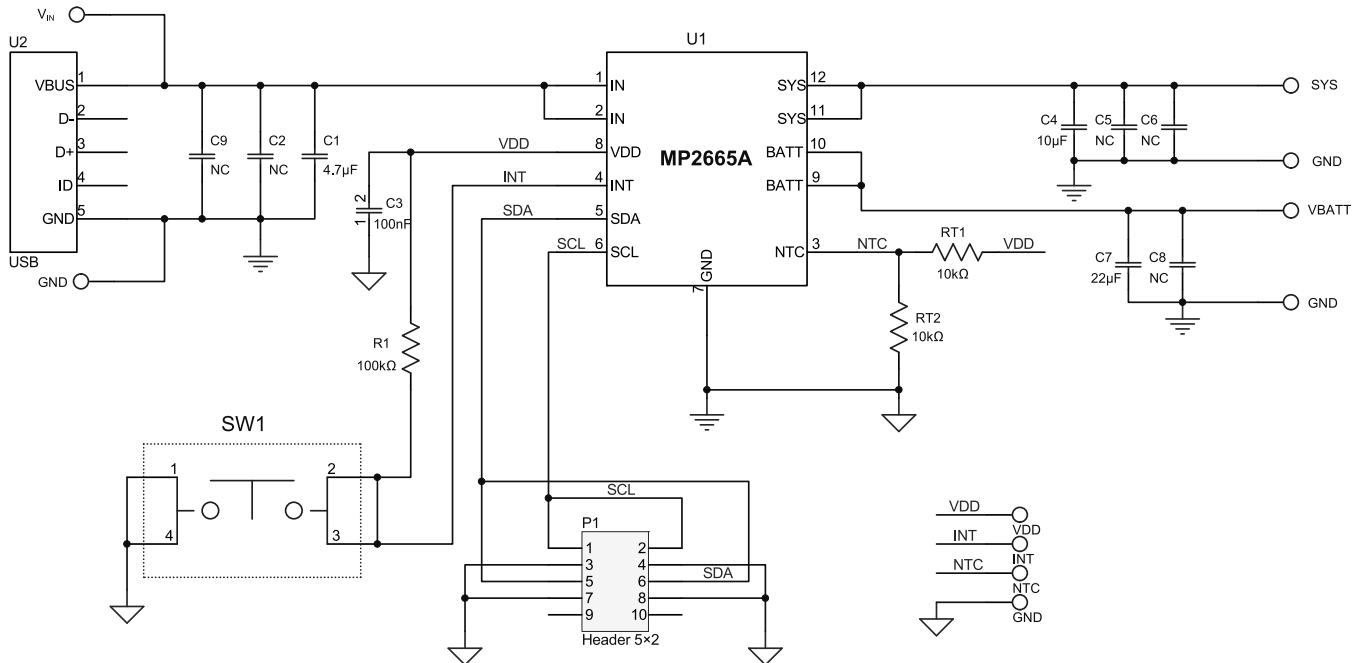

**Figure 24: Evaluation Board Schematic**


**EV2665A-QB-00A BILL OF MATERIALS**

| Qty | Ref      | Value             | Description                     | Package                   | Manufacturer | Manufacturer PN    |
|-----|----------|-------------------|---------------------------------|---------------------------|--------------|--------------------|
| 1   | C1       | 4.7μF             | Ceramic capacitor, 25V, X5R     | 0603                      | Murata       | GRM188R61E475KE11D |
| 2   | C2, C9   | NC                |                                 |                           |              |                    |
| 1   | C3       | 100nF             | Ceramic capacitor, 25V, X7R     | 0603                      | Murata       | GRM188R71E104KA01D |
| 1   | C4       | 10μF              | Ceramic capacitor, 16V, X7R     | 0805                      | Murata       | GRM21BR61C106KE15  |
| 1   | C5       | NC                | Ceramic capacitor, 25V, X7R     | 0805                      | Murata       | GRM21BR71E225KA73L |
| 2   | C6, C8   | NC                | Ceramic capacitor, 16V, X7R     | 0805                      | Murata       | GRM21BR61C106KE15  |
| 1   | C7       | 22μF              | Ceramic capacitor, 16V, X5R     | 0805                      | Murata       | GRM21BR61C226ME44L |
| 1   | P1       | 2.54mm            | 5-pin, dual-row header          | DIP                       | Any          |                    |
| 1   | R1       | 100kΩ             | Film resistor, 1%               | 0603                      | Yageo        | RC0603FR-07100KL   |
| 2   | RT1, RT2 | 10kΩ              | Film resistor, 1%               | 0603                      | Yageo        | RC0603FR-0710KL    |
| 1   | SW1      | 6.35mmx<br>8.89mm | Push switch                     | 7914J                     | Any          |                    |
| 1   | U2       | 6.8mmx<br>8.23mm  | Micro-B USB connector           | DIP                       | Any          |                    |
| 1   | U1       | MP2665A           | 1A, single-cell battery charger | QFN-12<br>(2.5mmx<br>3mm) | MPS          | MP2665AGQB-0000    |


## EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board.  $V_{IN} = 5V$ ,  $V_{BATT\_REG} = 4.2V$ ,  $I_{IN\_LIM} = 1000mA$ ,  $I_{CC} = 896mA$ ,  $I_{SYS} = 0.4A$ ,  $T_A = 25^{\circ}C$ , unless otherwise noted.

Charge Curve

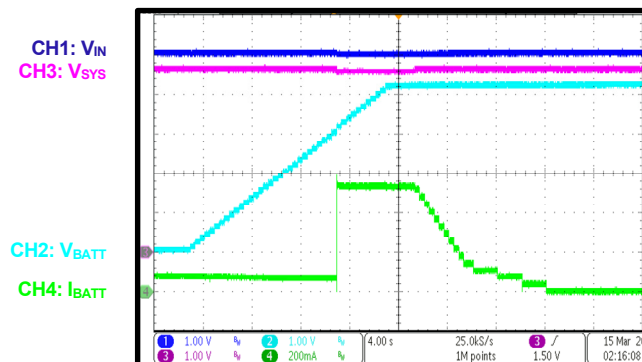

Auto-Recharge

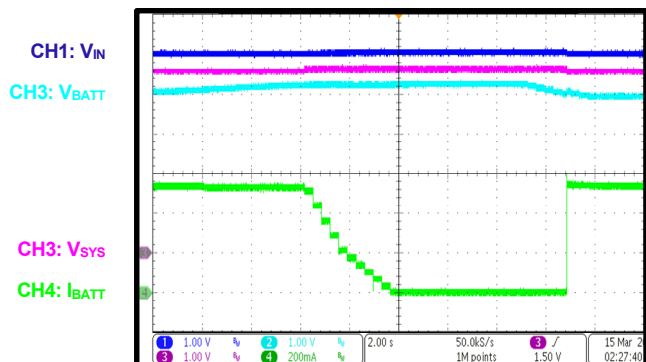

## PCB LAYOUT

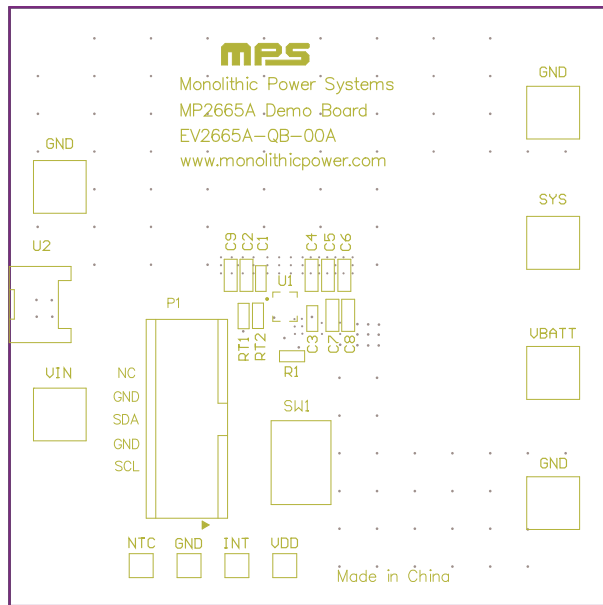


Figure 25: Top Silk

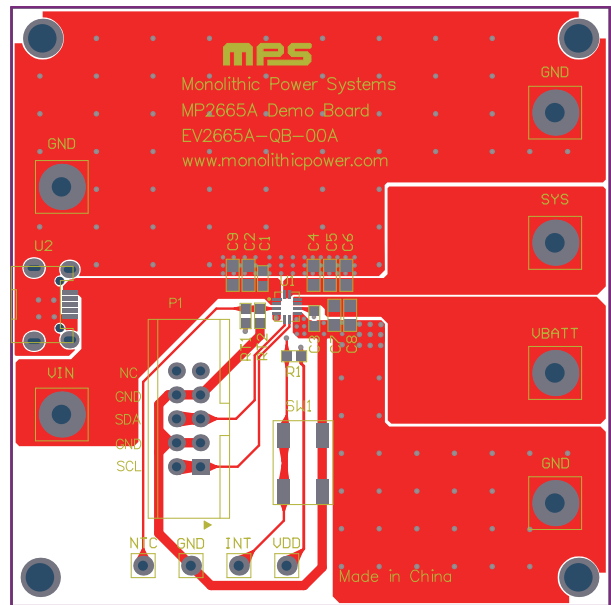


Figure 26: Top Layer

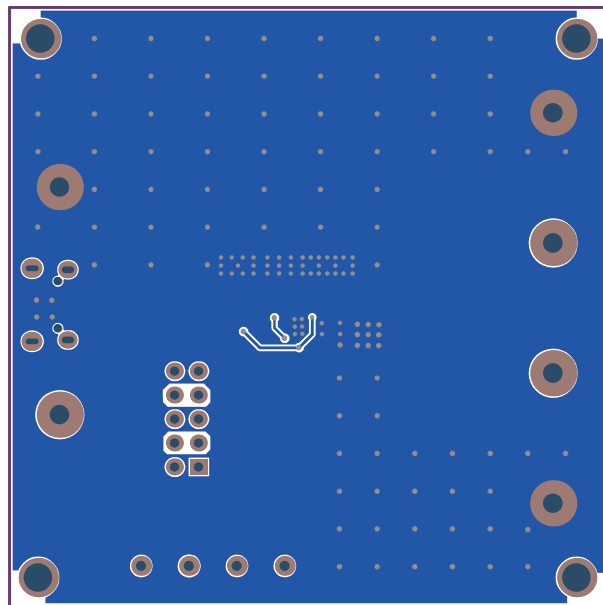


Figure 27: Bottom Layer

## REVISION HISTORY

| Revision # | Revision Date | Description     | Pages Updated |
|------------|---------------|-----------------|---------------|
| 1.0        | 1/3/2022      | Initial Release | -             |

**Notice:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.