



■ 特性 (FEATURES)

- 频率范围: 3.5-70MHz
- Frequency Range: 3.5-70MHz
- 适用于卓越的CPU时钟信号发生器
- Excellent clock signal generator for CPU's
- 适用于宽广的温度范围
- Available in extended temperature range




■ 标准规格 (STANDARD SPECIFICATION)

Item	Model	HC-49SM	Conditions
频率范围 (Frequency Range)		3.5-30.0MHz(Fund.) 30.0-70.0MHz(3rd Overtone)	Need to specify
调整频差 (Frequency Tolerance)		± 30ppm	at 25°C
温度频差 ( Freq. Tol. Over Temp )		± 30ppm or ± 50ppm	Need to specify
工作温度范围 (Operating Temp. Range)		-20~+70°C or -40~+85°C	
保存温度范围 (Storage Temp. Range)		-40~+85°C	
谐振电阻 (Series Resistance)		Refer to the table as below	at 25°C
负载电容 (Motional Capacitance)		20pF	Need to specify
静态电容 (Shunt Capacitance)		7.0pF Max.	
激励电平 (Drive Level)		100 μw typical	
年老化率 (Aging)		± 5ppm Max.	25 ± 3°C
绝缘阻抗 (Insulation Resistance)		500Mohm Min.	DC100V ± 15V


■ 谐振电阻 (SERIES RESISTANCE)

频率范围 (Freq. Range)	3.5-4MHz	4.01-6MHz	6.01-10MHz	10.01-27MHz	27.01-36MHz	36.01-70MHz
振动模式 (Mode)	Fund.	Fund.	Fund.	Fund.	Fund.3rd	Overtone
谐振电阻 (Series Resistance)	150ohmMax.	120ohmMax.	80ohmMax.	50ohmMax.	30ohmMax.	100ohmMax.
						80ohmMax.

■ OUTLINE DRAWING OF HC-49SM (mm)

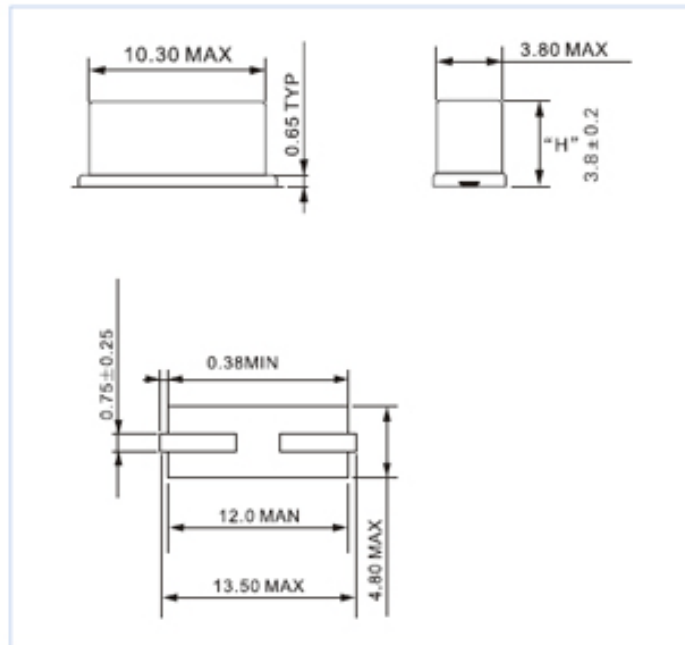

■ RECOMMENDED SOLDER PATTERN (mm)

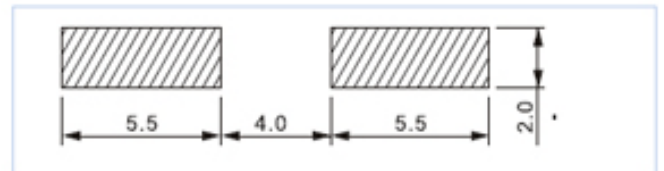

■ CARRIER TAPE DIMENSIONS

- 330mm REEL DIAMETER
- 24mm TAPE WIDTH
- 12mm PITCH
- 1000 PIECES PER REEL

