

## 3-Terminal 1 A Positive Voltage Regulator

### Description

The LM78MxxA series of three-terminal positive regulators are available in the TO-252-2 package with several fixed output voltages making it useful in a wide range of applications.

### Features


- Output Current up to 1A
- Output Voltages of 5, 6, 8, 12, 15, 18, 24V
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area (SOA)Protection




### Ordering Information

| DEVICE         | Package Type | MARKING | Packing | Packing Qty  |
|----------------|--------------|---------|---------|--------------|
| LM78M05ACDT/TR | TO-252-2     | 78M05A  | REEL    | 2500pcs/reel |
| LM78M06ACDT/TR | TO-252-2     | 78M06A  | REEL    | 2500pcs/reel |
| LM78M08ACDT/TR | TO-252-2     | 78M08A  | REEL    | 2500pcs/reel |
| LM78M12ACDT/TR | TO-252-2     | 78M12A  | REEL    | 2500pcs/reel |
| LM78M15ACDT/TR | TO-252-2     | 78M15A  | REEL    | 2500pcs/reel |
| LM78M18ACDT/TR | TO-252-2     | 78M18A  | REEL    | 2500pcs/reel |
| LM78M24ACDT/TR | TO-252-2     | 78M24A  | REEL    | 2500pcs/reel |

## Pin Configuration

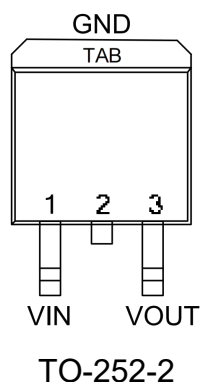

## Internal Block Diagram

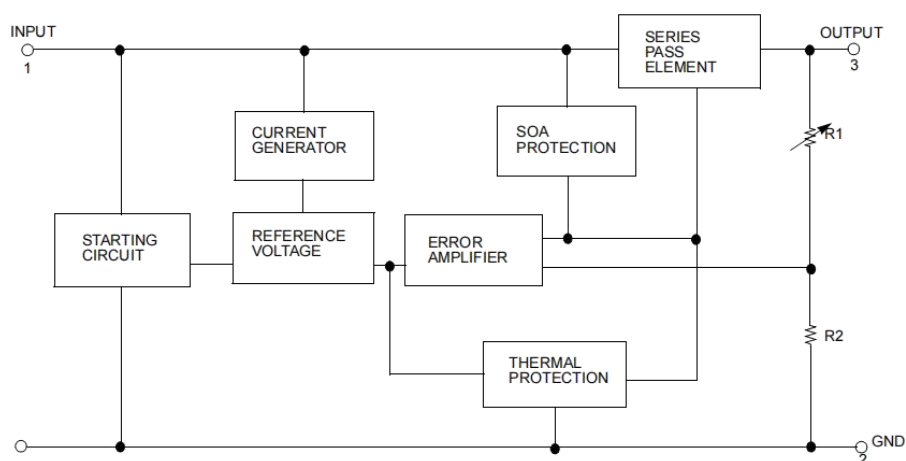

## Absolute Maximum Ratings

| Parameter                                                            | Symbol          | Value           | Unit         |
|----------------------------------------------------------------------|-----------------|-----------------|--------------|
| Input Voltage (for $V_O = 5V$ to $18V$ )                             | $V_I$           | 35              | V            |
| (for $V_O = 24V$ )                                                   | $V_I$           | 40              | V            |
| Thermal Resistance Junction-Case<br>TO-252-2 ( $T_c = +25^\circ C$ ) | $R_{\theta JC}$ | 2.5             | $^\circ C/W$ |
| Thermal Resistance Junction-Air<br>TO-252-2 ( $T_a = +25^\circ C$ )  | $R_{\theta JA}$ | 92              | $^\circ C/W$ |
| Operating Junction Temperature Range                                 | $T_{OPR}$       | $0 \sim +125$   | $^\circ C$   |
| Storage Temperature Range                                            | $T_{STG}$       | $-65 \sim +150$ | $^\circ C$   |
| Lead Temperature (Soldering, 10 seconds)                             | $T_L$           | 245             | $^\circ C$   |

**Note:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

## Electrical Characteristics (LM78M05A)

(Refer to the test circuits,  $-40 < T_J < +85^{\circ}\text{C}$ ,  $I_O = 1\text{A}$ ,  $V_I = 10\text{V}$ , unless otherwise specified,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

| Parameter                | Symbol              | Conditions                                                                                                  | Min. | Typ. | Max. | Unit                   |
|--------------------------|---------------------|-------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| Output Voltage           | $V_O$               | $T_J = +25^{\circ}\text{C}$                                                                                 | 4.8  | 5    | 5.2  | V                      |
|                          |                     | $I_O = 5\text{mA to } 1\text{A}$ $V_I = 7\text{V to } 20\text{V}$                                           | 4.75 | 5    | 5.25 |                        |
| Line Regulation (Note3)  | $\Delta V_O$        | $I_O = 200\text{mA}$ $V_I = 7\text{V to } 25\text{V}$                                                       | -    | -    | 100  | mV                     |
|                          |                     | $T_J = +25^{\circ}\text{C}$ $V_I = 8\text{V to } 25\text{V}$                                                | -    | -    | 50   |                        |
| Load Regulation (Note3)  | $\Delta V_O$        | $I_O = 5\text{mA to } 0.5\text{A}$ , $T_J = +25^{\circ}\text{C}$                                            | -    | -    | 100  | mV                     |
|                          |                     | $I_O = 5\text{mA to } 200\text{mA}$ , $T_J = +25^{\circ}\text{C}$                                           | -    | -    | 50   |                        |
| Quiescent Current        | $I_Q$               | $T_J = +25^{\circ}\text{C}$                                                                                 | -    | 4.0  | 6.0  | mA                     |
| Quiescent Current Change | $\Delta I_Q$        | $I_O = 5\text{mA to } 350\text{mA}$                                                                         | -    | -    | 0.5  | mA                     |
|                          |                     | $I_O = 200\text{mA}$ $V_I = 8\text{V to } 25\text{V}$                                                       | -    | -    | 0.8  |                        |
| Output Voltage Drift     | $\Delta V/\Delta T$ | $I_O = 5\text{mA}$<br>$T_J = -40 \text{ to } +85^{\circ}\text{C}$                                           | -    | -0.5 | -    | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage     | $V_N$               | $f = 10\text{Hz to } 100\text{kHz}$                                                                         | -    | 40   | -    | $\mu\text{V}/V_O$      |
| Ripple Rejection         | RR                  | $f = 120\text{Hz}$ , $I_O = 300\text{mA}$<br>$V_I = 8\text{V to } 18\text{V}$ , $T_J = +25^{\circ}\text{C}$ | -    | 80   | -    | dB                     |
| Dropout Voltage          | $V_D$               | $T_J = +25^{\circ}\text{C}$ , $I_O = 500\text{mA}$                                                          | -    | 2    | -    | V                      |
| Short Circuit Current    | $I_{SC}$            | $T_J = +25^{\circ}\text{C}$ , $V_I = 35\text{V}$                                                            | -    | 300  | -    | mA                     |
| Peak Current             | $I_{PK}$            | $T_J = +25^{\circ}\text{C}$                                                                                 | -    | 700  | -    | mA                     |

### Note:

Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (LM78M06A)** (Continued)

(Refer to the test circuits,  $-40 < T_J < +85^{\circ}\text{C}$ ,  $I_O = 1\text{A}$ ,  $V_I = 11\text{V}$ , unless otherwise specified,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

| Parameter                | Symbol              | Conditions                                                                                                   | Min. | Typ. | Max. | Unit                   |
|--------------------------|---------------------|--------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| Output Voltage           | $V_O$               | $T_J = +25^{\circ}\text{C}$                                                                                  | 5.75 | 6    | 6.25 | V                      |
|                          |                     | $I_O = 5\text{mA}$ to $1\text{A}$ , $V_I = 8\text{V}$ to $21\text{V}$                                        | 5.7  | 6    | 6.3  |                        |
| Line Regulation (Note1)  | $\Delta V_O$        | $I_O = 200\text{mA}$ $V_I = 8\text{V}$ to $25\text{V}$                                                       | -    | -    | 100  | mV                     |
|                          |                     | $T_J = +25^{\circ}\text{C}$ $V_I = 9\text{V}$ to $25\text{V}$                                                | -    | -    | 50   |                        |
| Load Regulation (Note1)  | $\Delta V_O$        | $I_O = 5\text{mA}$ to $0.5\text{A}$ , $T_J = +25^{\circ}\text{C}$                                            | -    | -    | 120  | mV                     |
|                          |                     | $I_O = 5\text{mA}$ to $200\text{mA}$ , $T_J = +25^{\circ}\text{C}$                                           | -    | -    | 60   |                        |
| Quiescent Current        | $I_Q$               | $T_J = +25^{\circ}\text{C}$                                                                                  | -    | 4.0  | 6.0  | mA                     |
| Quiescent Current Change | $\Delta I_Q$        | $I_O = 5\text{mA}$ to $350\text{mA}$                                                                         | -    | -    | 0.5  | mA                     |
|                          |                     | $I_O = 200\text{mA}$ $V_I = 9\text{V}$ to $25\text{V}$                                                       | -    | -    | 0.8  |                        |
| Output Voltage Drift     | $\Delta V/\Delta T$ | $I_O = 5\text{mA}$<br>$T_J = -40$ to $+85^{\circ}\text{C}$                                                   | -    | -0.5 | -    | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage     | $V_N$               | $f = 10\text{Hz}$ to $100\text{kHz}$                                                                         | -    | 45   | -    | $\mu\text{V}/V_O$      |
| Ripple Rejection         | RR                  | $f = 120\text{Hz}$ , $I_O = 300\text{mA}$<br>$V_I = 9\text{V}$ to $19\text{V}$ , $T_J = +25^{\circ}\text{C}$ | -    | 80   | -    | dB                     |
| Dropout Voltage          | $V_D$               | $T_J = +25^{\circ}\text{C}$ , $I_O = 500\text{mA}$                                                           | -    | 2    | -    | V                      |
| Short Circuit Current    | ISC                 | $T_J = +25^{\circ}\text{C}$ , $V_I = 35\text{V}$                                                             | -    | 300  | -    | mA                     |
| Peak Current             | IPK                 | $T_J = +25^{\circ}\text{C}$                                                                                  | -    | 700  | -    | mA                     |

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (LM78M08A)** (Continued)

(Refer to the test circuits,  $-40 < T_J < +85^{\circ}\text{C}$ ,  $I_O = 1\text{A}$ ,  $V_I = 14\text{V}$ , unless otherwise specified,  $C_I = 0.33\mu\text{F}$ ,  $C_O = 0.1\mu\text{F}$ )

| Parameter                | Symbol       | Conditions                                                                                                        | Min. | Typ. | Max. | Unit                   |
|--------------------------|--------------|-------------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| Output Voltage           | $V_O$        | $T_J = +25^{\circ}\text{C}$                                                                                       | 7.7  | 8    | 8.3  | V                      |
|                          |              | $I_O = 5\text{mA}$ to $1\text{A}$ $V_I = 10.5\text{V}$ to $23\text{V}$                                            | 7.6  | 8    | 8.4  |                        |
| Line Regulation (Note1)  | $\Delta V_O$ | $I_O = 200\text{mA}$ $V_I = 10.5\text{V}$ to $25\text{V}$                                                         | -    | -    | 100  | mV                     |
|                          |              | $T_J = +25^{\circ}\text{C}$ $V_I = 11\text{V}$ to $25\text{V}$                                                    | -    | -    | 50   |                        |
| Load Regulation (Note1)  | $\Delta V_O$ | $I_O = 5\text{mA}$ to $0.5\text{A}$ , $T_J = +25^{\circ}\text{C}$                                                 | -    | -    | 160  | mV                     |
|                          |              | $I_O = 5\text{mA}$ to $200\text{mA}$ , $T_J = +25^{\circ}\text{C}$                                                | -    | -    | 80   |                        |
| Quiescent Current        | $I_Q$        | $T_J = +25^{\circ}\text{C}$                                                                                       | -    | 4.0  | 6.0  | mA                     |
| Quiescent Current Change | $\Delta I_Q$ | $I_O = 5\text{mA}$ to $350\text{mA}$                                                                              | -    | -    | 0.5  | mA                     |
|                          |              | $I_O = 200\text{mA}$<br>$V_I = 10.5\text{V}$ to $25\text{V}$                                                      | -    | -    | 0.8  |                        |
| Output Voltage Drift     | RR           | $I_O = 5\text{mA}$<br>$T_J = -40$ to $+85^{\circ}\text{C}$                                                        | -    | 0.5  | -    | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage     | $V_N$        | $f = 10\text{Hz}$ to $100\text{kHz}$                                                                              | -    | 52   | -    | V/ $V_O$               |
| Ripple Rejection         | RR           | $f = 120\text{Hz}$ , $I_O = 300\text{mA}$<br>$V_I = 11.5\text{V}$ to $21.5\text{V}$ , $T_J = +25^{\circ}\text{C}$ | -    | 80   | -    | dB                     |
| Dropout Voltage          | $V_D$        | $T_J = +25^{\circ}\text{C}$ , $I_O = 500\text{mA}$                                                                | -    | 2    | -    | V                      |
| Short Circuit Current    | ISC          | $T_J = +25^{\circ}\text{C}$ , $V_I = 35\text{V}$                                                                  | -    | 300  | -    | mA                     |
| Peak Current             | IPK          | $T_J = +25^{\circ}\text{C}$                                                                                       | -    | 700  | -    | mA                     |

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## Electrical Characteristics (LM78M12A) (Continued)

(Refer to the test circuits,  $-40 < T_J < +85^{\circ}\text{C}$ ,  $I_O=1\text{A}$ ,  $V_I=19\text{V}$ , unless otherwise specified,  $C_I=0.33\mu\text{F}$ ,  $C_O=0.1\mu\text{F}$ )

| Parameter                | Symbol              | Conditions                                                                                                   | Min. | Typ. | Max. | Unit                   |
|--------------------------|---------------------|--------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| Output Voltage           | $V_O$               | $T_J = +25^{\circ}\text{C}$                                                                                  | 11.5 | 12   | 12.5 | V                      |
|                          |                     | $I_O = 5\text{mA to } 1\text{A}$ , $V_I = 14.5\text{V to } 27\text{V}$                                       | 11.4 | 12   | 12.6 |                        |
| Line Regulation (Note1)  | $\Delta V_O$        | $I_O = 200\text{mA}$<br>$T_J = +25^{\circ}\text{C}$                                                          | -    | -    | 100  | mV                     |
|                          |                     | $V_I = 14.5\text{V to } 30\text{V}$<br>$V_I = 16\text{V to } 30\text{V}$                                     | -    | -    | 50   |                        |
| Load Regulation (Note1)  | $\Delta V_O$        | $I_O = 5\text{mA to } 0.5\text{A}$ , $T_J = +25^{\circ}\text{C}$                                             | -    | -    | 240  | mV                     |
|                          |                     | $I_O = 5\text{mA to } 200\text{mA}$ , $T_J = +25^{\circ}\text{C}$                                            | -    | -    | 120  |                        |
| Quiescent Current        | $I_Q$               | $T_J = +25^{\circ}\text{C}$                                                                                  | -    | 4.1  | 6.0  | mA                     |
| Quiescent Current Change | $\Delta I_Q$        | $I_O = 5\text{mA to } 350\text{mA}$                                                                          | -    | -    | 0.5  | mA                     |
|                          |                     | $I_O = 200\text{mA}$<br>$V_I = 14.5\text{V to } 30\text{V}$                                                  | -    | -    | 0.8  |                        |
| Output Voltage Drift     | $\Delta V/\Delta T$ | $I_O = 5\text{mA}$<br>$T_J = -40 \text{ to } +85^{\circ}\text{C}$                                            | -    | -0.5 | -    | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage     | $V_N$               | $f = 10\text{Hz to } 100\text{kHz}$                                                                          | -    | 75   | -    | $\mu\text{V}/V_O$      |
| Ripple Rejection         | RR                  | $f = 120\text{Hz}$ , $I_O = 300\text{mA}$<br>$V_I = 15\text{V to } 25\text{V}$ , $T_J = +25^{\circ}\text{C}$ | -    | 80   | -    | dB                     |
| Dropout Voltage          | $V_D$               | $T_J = +25^{\circ}\text{C}$ , $I_O = 500\text{mA}$                                                           | -    | 2    | -    | V                      |
| Short Circuit Current    | ISC                 | $T_J = +25^{\circ}\text{C}$ , $V_I = 35\text{V}$                                                             | -    | 300  | -    | mA                     |
| Peak Current             | IPK                 | $T_J = +25^{\circ}\text{C}$                                                                                  | -    | 700  | -    | mA                     |

### Note:

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## Electrical Characteristics (LM78M15A) (Continued)

(Refer to the test circuits,  $-40 < T_J < +85^{\circ}\text{C}$ ,  $I_O=1\text{A}$ ,  $V_I=23\text{V}$ , unless otherwise specified,  $C_I=0.33\mu\text{F}$ ,  $C_O=0.1\mu\text{F}$ )

| Parameter                | Symbol              | Conditions                                                                                                       | Min.  | Typ. | Max.  | Unit                   |
|--------------------------|---------------------|------------------------------------------------------------------------------------------------------------------|-------|------|-------|------------------------|
| Output Voltage           | $V_O$               | $T_J = +25^{\circ}\text{C}$                                                                                      | 14.4  | 15   | 15.6  | V                      |
|                          |                     | $I_O = 5\text{mA to } 1\text{A}$ , $V_I = 17.5\text{V to } 30\text{V}$                                           | 14.25 | 15   | 15.75 |                        |
| Line Regulation (Note1)  | $\Delta V_O$        | $I_O = 200\text{mA}$<br>$T_J = +25^{\circ}\text{C}$                                                              | -     | -    | 100   | mV                     |
|                          |                     | $V_I = 17.5\text{V to } 30\text{V}$<br>$V_I = 20\text{V to } 30\text{V}$                                         | -     | -    | 50    |                        |
| Load Regulation (Note1)  | $\Delta V_O$        | $I_O = 5\text{mA to } 0.5\text{A}$ , $T_J = +25^{\circ}\text{C}$                                                 | -     | -    | 300   | mV                     |
|                          |                     | $I_O = 5\text{mA to } 200\text{mA}$ , $T_J = +25^{\circ}\text{C}$                                                | -     | -    | 150   |                        |
| Quiescent Current        | $I_Q$               | $T_J = +25^{\circ}\text{C}$                                                                                      | -     | 4.1  | 6.0   | mA                     |
| Quiescent Current Change | $\Delta I_Q$        | $I_O = 5\text{mA to } 350\text{mA}$                                                                              | -     | -    | 0.5   | mA                     |
|                          |                     | $I_O = 200\text{mA}$<br>$V_I = 17.5\text{V to } 30\text{V}$                                                      | -     | -    | 0.8   |                        |
| Output Voltage Drift     | $\Delta V/\Delta T$ | $I_O = 5\text{mA}$<br>$T_J = -40 \text{ to } +85^{\circ}\text{C}$                                                | -     | -1   | -     | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage     | $V_N$               | $f = 10\text{Hz to } 100\text{kHz}$                                                                              | -     | 100  | -     | V/ $V_O$               |
| Ripple Rejection         | RR                  | $f = 120\text{Hz}$ , $I_O = 300\text{mA}$<br>$V_I = 18.5\text{V to } 28.5\text{V}$ , $T_J = +25^{\circ}\text{C}$ | -     | 70   | -     | dB                     |
| Dropout Voltage          | $V_D$               | $T_J = +25^{\circ}\text{C}$ , $I_O = 500\text{mA}$                                                               | -     | 2    | -     | V                      |
| Short Circuit Current    | ISC                 | $T_J = +25^{\circ}\text{C}$ , $V_I = 35\text{V}$                                                                 | -     | 300  | -     | mA                     |
| Peak Current             | IPK                 | $T_J = +25^{\circ}\text{C}$                                                                                      | -     | 700  | -     | mA                     |

### Note:

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (LM78M18A)** (Continued)

(Refer to the test circuits,  $-40 < T_J < +85^{\circ}\text{C}$ ,  $I_O=1\text{A}$ ,  $V_I=26\text{V}$ , unless otherwise specified,  $C_I=0.33\mu\text{F}$ ,  $C_O=0.1\mu\text{F}$ )

| Parameter                | Symbol              | Conditions                                                                                                  | Min. | Typ. | Max. | Unit                   |
|--------------------------|---------------------|-------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| Output Voltage           | $V_O$               | $T_J = +25^{\circ}\text{C}$                                                                                 | 17.3 | 18   | 18.7 | V                      |
|                          |                     | $I_O = 5\text{mA to } 1\text{A}$ , $V_I = 20.5\text{V to } 33\text{V}$                                      | 17.1 | 18   | 18.9 |                        |
| Line Regulation (Note1)  | $\Delta V_O$        | $I_O = 200\text{mA}$ , $V_I = 21\text{V to } 33\text{V}$                                                    | -    | -    | 100  | mV                     |
|                          |                     | $T_J = +25^{\circ}\text{C}$ , $V_I = 24\text{V to } 33\text{V}$                                             | -    | -    | 50   |                        |
| Load Regulation (Note1)  | $\Delta V_O$        | $I_O = 5\text{mA to } 0.5\text{A}$ , $T_J = +25^{\circ}\text{C}$                                            | -    | -    | 360  | mV                     |
|                          |                     | $I_O = 5\text{mA to } 200\text{mA}$ , $T_J = +25^{\circ}\text{C}$                                           | -    | -    | 180  |                        |
| Quiescent Current        | $I_Q$               | $T_J = +25^{\circ}\text{C}$                                                                                 | -    | 4.2  | 6.0  | mA                     |
| Quiescent Current Change | $\Delta I_Q$        | $I_O = 5\text{mA to } 350\text{mA}$                                                                         | -    | -    | 0.5  | mA                     |
|                          |                     | $I_O = 200\text{mA}$ , $V_I = 21\text{V to } 33\text{V}$                                                    | -    | -    | 0.8  |                        |
| Output Voltage Drift     | $\Delta V/\Delta T$ | $I_O = 5\text{mA}$ , $T_J = -40 \text{ to } 85^{\circ}\text{C}$                                             | -    | -1.1 | -    | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage     | $V_N$               | $f = 10\text{Hz to } 100\text{kHz}$                                                                         | -    | 100  | -    | V/ $V_O$               |
| Ripple Rejection         | RR                  | $f = 120\text{Hz}$ , $I_O = 300\text{mA}$ , $V_I = 22\text{V to } 32\text{V}$ , $T_J = +25^{\circ}\text{C}$ | -    | 70   | -    | dB                     |
| Dropout Voltage          | $V_D$               | $T_J = +25^{\circ}\text{C}$ , $I_O = 500\text{mA}$                                                          | -    | 2    | -    | V                      |
| Short Circuit Current    | ISC                 | $T_J = +25^{\circ}\text{C}$ , $V_I = 35\text{V}$                                                            | -    | 300  | -    | mA                     |
| Peak Current             | IPK                 | $T_J = +25^{\circ}\text{C}$                                                                                 | -    | 700  | -    | mA                     |

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

**Electrical Characteristics (LM78M24A)** (Continued)

(Refer to the test circuits,  $-40 < T_J < +85^{\circ}\text{C}$ ,  $I_O=350\text{mA}$ ,  $V_I=33\text{V}$ , unless otherwise specified,  $C_I=0.33\mu\text{F}$ ,  $C_O=0.1\mu\text{F}$ )

| Parameter                | Symbol              | Conditions                                                                                                  | Min. | Typ. | Max. | Unit                   |
|--------------------------|---------------------|-------------------------------------------------------------------------------------------------------------|------|------|------|------------------------|
| Output Voltage           | $V_O$               | $T_J = +25^{\circ}\text{C}$                                                                                 | 23   | 24   | 25   | V                      |
|                          |                     | $I_O = 5\text{mA to } 1\text{A}$ , $V_I = 27\text{V to } 38\text{V}$                                        | 22.8 | 24   | 25.2 |                        |
| Line Regulation (Note1)  | $\Delta V_O$        | $I_O = 200\text{mA}$ , $V_I = 27\text{V to } 38\text{V}$                                                    | -    | -    | 100  | mV                     |
|                          |                     | $T_J = +25^{\circ}\text{C}$ , $V_I = 28\text{V to } 38\text{V}$                                             | -    | -    | 50   |                        |
| Load Regulation (Note1)  | $\Delta V_O$        | $I_O = 5\text{mA to } 0.5\text{A}$ , $T_J = +25^{\circ}\text{C}$                                            | -    | -    | 480  | mV                     |
|                          |                     | $I_O = 5\text{mA to } 200\text{mA}$ , $T_J = +25^{\circ}\text{C}$                                           | -    | -    | 240  |                        |
| Quiescent Current        | $I_Q$               | $T_J = +25^{\circ}\text{C}$                                                                                 | -    | 4.2  | 6.0  | mA                     |
| Quiescent Current Change | $\Delta I_Q$        | $I_O = 5\text{mA to } 350\text{mA}$                                                                         | -    | -    | 0.5  | mA                     |
|                          |                     | $I_O = 200\text{mA}$ , $V_I = 27\text{V to } 38\text{V}$                                                    | -    | -    | 0.8  |                        |
| Output Voltage Drift     | $\Delta V/\Delta T$ | $I_O = 5\text{mA}$ , $T_J = -40 \text{ to } +85^{\circ}\text{C}$                                            | -    | -1.2 | -    | mV/ $^{\circ}\text{C}$ |
| Output Noise Voltage     | $V_N$               | $f = 10\text{Hz to } 100\text{kHz}$                                                                         | -    | 170  | -    | $\mu\text{V}/V_O$      |
| Ripple Rejection         | RR                  | $f = 120\text{Hz}$ , $I_O = 300\text{mA}$ , $V_I = 28\text{V to } 38\text{V}$ , $T_J = +25^{\circ}\text{C}$ | -    | 70   | -    | dB                     |
| Dropout Voltage          | $V_D$               | $T_J = +25^{\circ}\text{C}$ , $I_O = 500\text{mA}$                                                          | -    | 2    | -    | V                      |
| Short Circuit Current    | ISC                 | $T_J = +25^{\circ}\text{C}$ , $V_I = 35\text{V}$                                                            | -    | 300  | -    | mA                     |
| Peak Current             | IPK                 | $T_J = +25^{\circ}\text{C}$                                                                                 | -    | 700  | -    | mA                     |

**Note:**

1. Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to heating effects must be taken into account separately. Pulse testing with low duty is used.

## Typical Applications

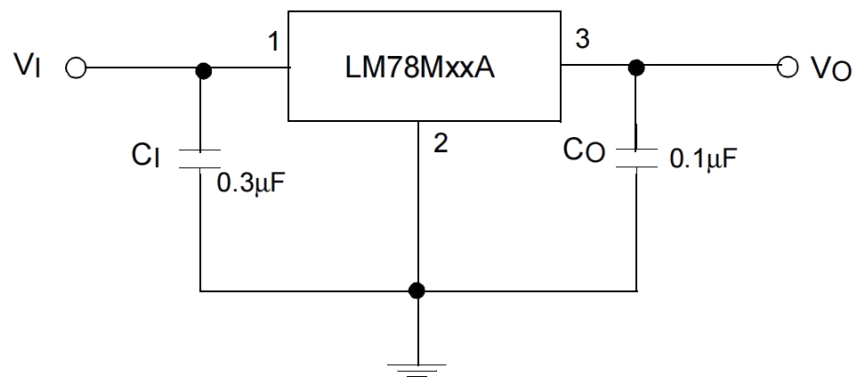


Figure 1. Fixed Output Regulator

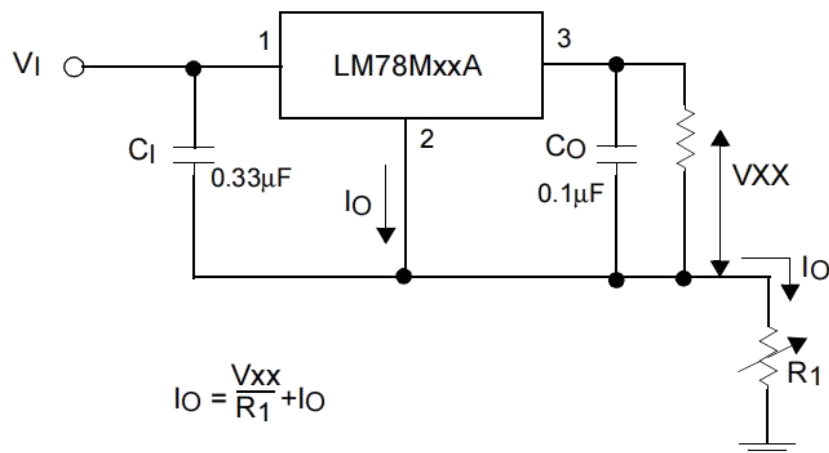


Figure 2. Constant Current Regulator

### Notes:

1. To specify an output voltage, substitute voltage value for "XX"
2. Although no output capacitor is needed for stability, it does improve transient response.
3. CI is required if regulator is located an appreciable distance from power Supply filter



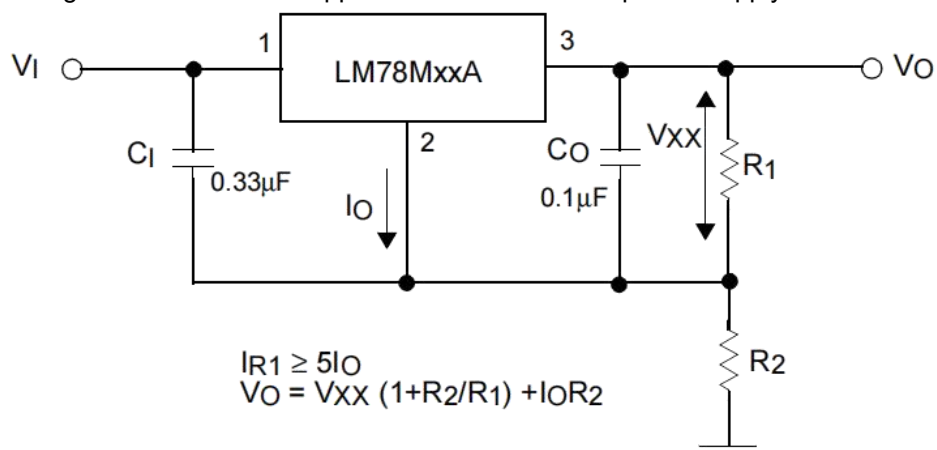


Figure 3. Circuit for Increasing Output Voltage



## Physical Dimensions

TO-252-2

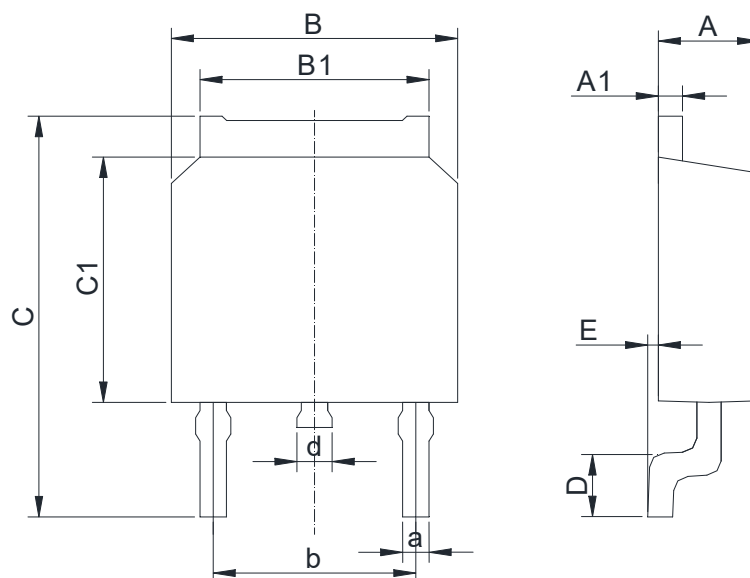

Dimensions In Millimeters(TO-252-2)

| Symbol: | A    | A1   | B    | B1   | C    | C1   | D    | E    | a    | b    | d    |
|---------|------|------|------|------|------|------|------|------|------|------|------|
| Min:    | 2.10 | 0.45 | 6.30 | 5.10 | 9.20 | 5.30 | 0.90 | 0    | 0.50 | 4.45 | 0.70 |
| Max:    | 2.50 | 0.70 | 6.75 | 5.50 | 10.6 | 6.30 | 1.75 | 0.23 | 0.80 | 4.75 | 1.20 |

## Revision History

| DATE      | REVISION                                                                                  | PAGE |
|-----------|-------------------------------------------------------------------------------------------|------|
| 2018-8-5  | New                                                                                       | 1-11 |
| 2023-9-13 | Update encapsulation type 、 Update Lead Temperature 、 Add annotation for Maximum Ratings. | 1、 2 |

**IMPORTANT STATEMENT:**

Huaguan Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Huaguan Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Huaguan Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: Select the appropriate Huaguan Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Huaguan Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Huaguan Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Huaguan Semiconductor, and the user shall not claim any compensation liability against Huaguan Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Huaguan Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Huaguan Semiconductor. Not all parameters of each device need to be tested.

The documentation of Huaguan Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Huaguan Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Huaguan Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Huaguan Semiconductor accepts no liability for any loss or damage caused by infringement.