





主要材質信息 Materials

- 觸刀 Contacts: 鍍錫黃銅 Tin plated brass
- 管體 Body: 陶瓷管 Ceramic
玻璃纖維管 Melamine
- 熔體 Fuse element: 純銀 Pure silver
- 填料 Filler: 高純度石英砂 Pure silicon sand


熔斷器外形及安裝尺寸 Shapes and Dimensions (mm)

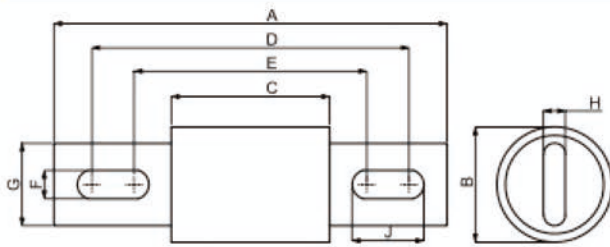


圖(1) / Fig. (1)

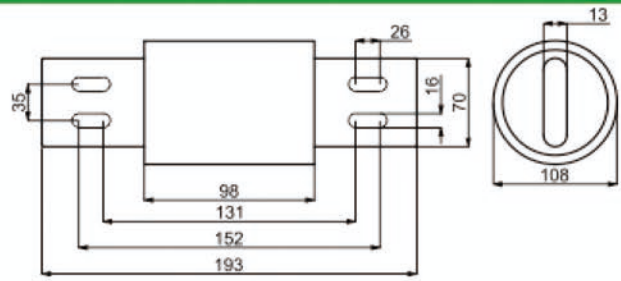

圖(2) / Fig. (2)

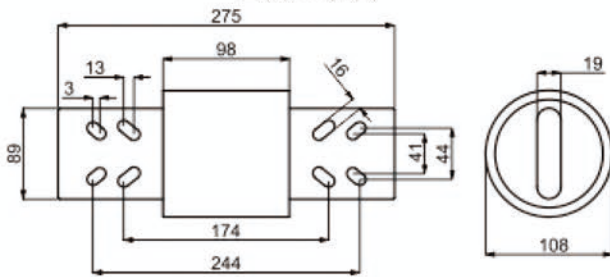

圖(3) / Fig. (3)

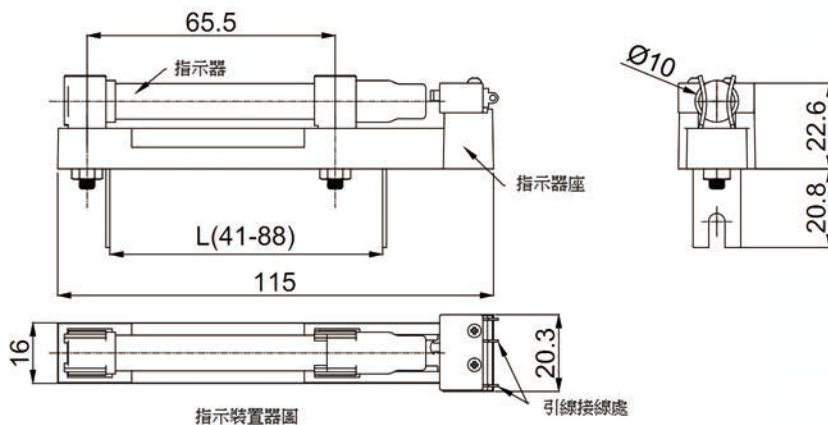

指示裝置器圖


引線接線處

規格 / Spec.	參考圖 / Ref.	A	B	C	D	E	F	G	H	J
5A-30A	圖(1) / Fig. (1)	73	14	47	63	63	6	10	2	6
35A-60A		111	21	70	94	84	9	18	3	14
70A-100A		112	24	69	92	85	9	19	3	13
125A-200A		129	38	72	106	89	10	25	6	19
225A-400A		129	51	72	109	90	10	38	6	20
450A-600A		129	51	72	109	90	10	38	6	20
700A-800A		180	64	72	145	106	13	51	10	33
900A-1000A		圖(2) / Fig. (2)								
1200A		圖(3) / Fig. (3)								





產品型號說明 Product Numbering System

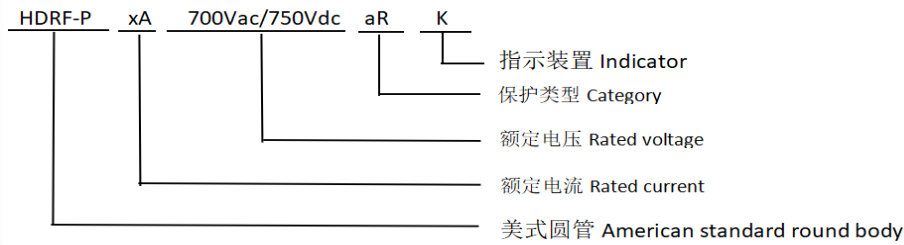

產品標準 Referred Standard

GB13539.4, IEC60269.4, UL248-13

基本資料 Basic Information

美式快速熔斷器根據其產品設計構造具有如下特點:

- 總 I^2t 小
 - 功率損耗小
 - 直流性能優越
 - 弧電壓小
- Due to the good construction and design, American standard fast-acting fuse benefits:
- Low I^2t
 - Low power loss
 - High DC performance
 - Low arc voltage

主要技術參數 Main Technical Characteristic

產品型號 Product number	電流 Rated current(A)	I^2t (A ² s)		功率損耗 Power loss	額定分斷電流 Rated breaking capability
		弧前 I^2t Pre-arcing	700V I^2t		
HDRF-P	5	1.6	10	1.5	100KA(700Vac) 50KA(750Vdc)
	10	3.6	20	4	
	15	10	75	5.5	
	20	26	180	6	
	25	44	340	7	
	30	58	450	9	
	35	34	160	12	
	40	76	320	12	
	50	135	600	12	
	60	210	950	15.5	
	70	305	2000	18	
	80	360	2400	21	
	90	415	2700	25	
	100	540	3500	27	
	125	1800	7300	28	
	HDRF-P	150	2900	11700	
175		4200	16700	35	
200		5500	22000	43	
225		7700	31300	45	
250		10500	42500	48	
300		17600	71200	58	
350		23700	95600	65	
400		31000	125000	78	
450		36400	137000	94	
500		45200	170000	107	
600		66700	250000	122	
700		5400	300000	125	
800	78000	450000	140		
900	91500	530000	150		
1000	120000	600000	170		
1200	195000	1100000	190		






電氣特性 Electrical Characteristics

焦耳積分值 Joule integral I²t

以下電氣特性曲線說明了額定電壓及15%功率因數時的總焦耳積分值I²t。如施加的電壓并非額定電壓，可以乘以校正因數K求算實際的I²t。與圖中工作電壓Eg(RMS)與校正因數K的函數關係。


The Joule integral I²t at rated voltage and at power factor of 15% are given in the electrical characteristics. For other voltage, the clearing I²t is found by multiplying by correction factor, K, given as a function of applied working voltage Eg, rms.

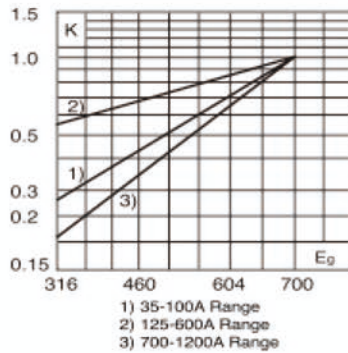

弧電壓 Arc voltage

圖中曲線說明了15%功率因數時施加的電壓Eg(RMS)與工作時熔斷器上可能數顯的峰值弧電壓UL的函數關係


The curve gives the peak arc voltage, UL, which may appear across the fuse during its operation as a function of the applied working voltage, Eg, rms, at a power factor of 15%.

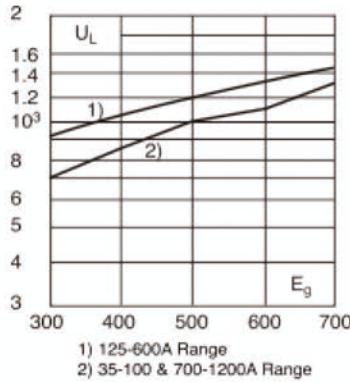



功率損耗 Power loss

以下電氣特性曲線說明了額定電流時的功率損耗。根據曲線可以計算負載電流低於額定電流時的功率損耗。參閱下圖，校正因素Kp是負載率 (RMS負載電流Ib是負載電流得出的百分比)的函數

Power loss at rated current is given in the electrical characteristics. The curve allows the calculation of the power losses at load currents lower than the rated current. The correction factor, Kp, is given as a function of the RMS load current, Ib, in % of the rated current.

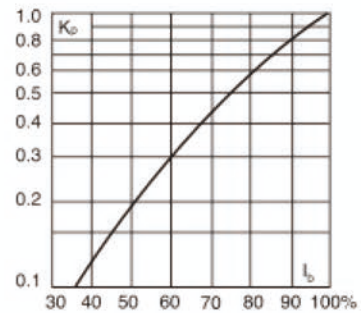

HDRF-P時間電流特性 Time-Current Characteristics

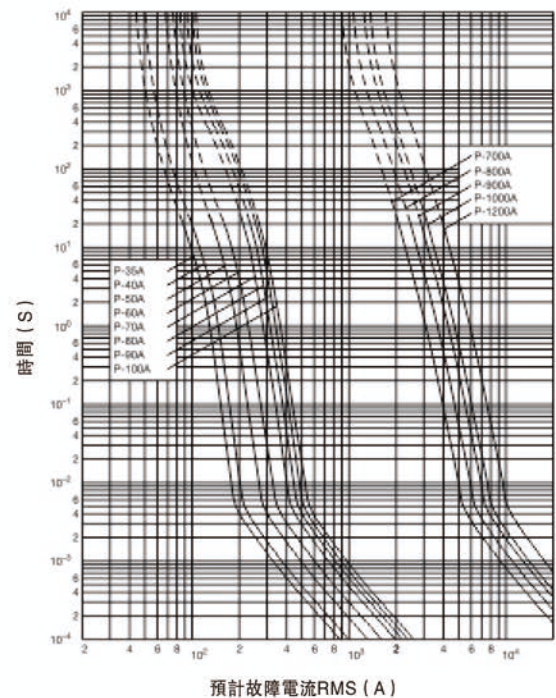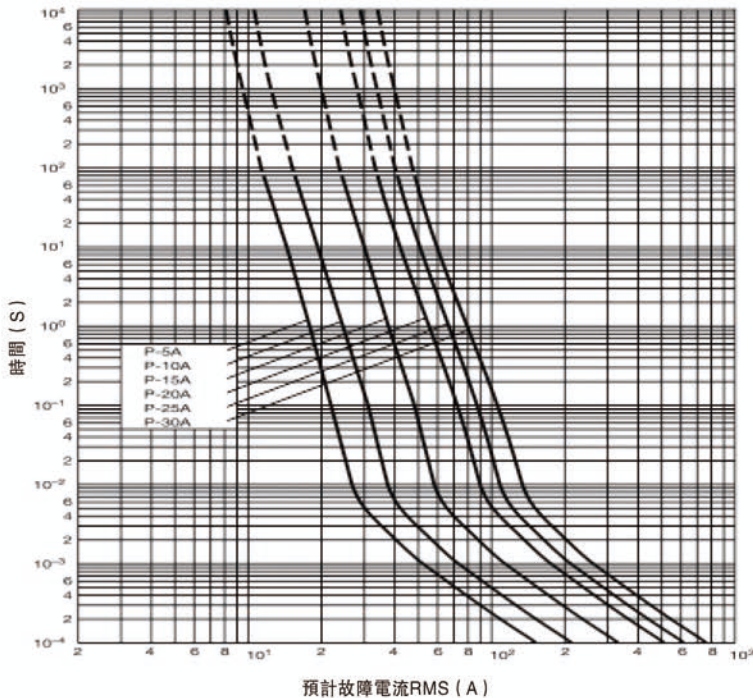



HDRF-P時間電流特性 Time-Current Characteristics

