ROHS

http://www.smtswitch.com

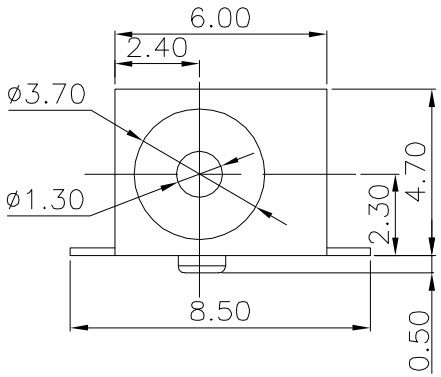

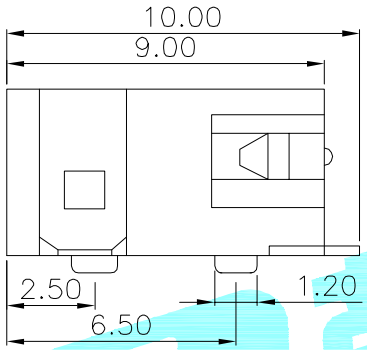

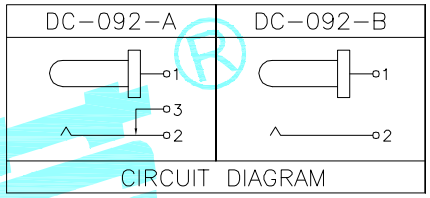

P.C.B LAYOUT(Copper-side view)

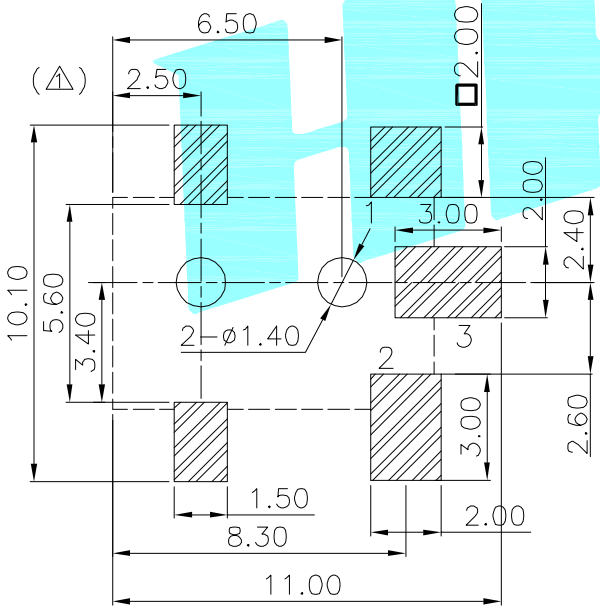

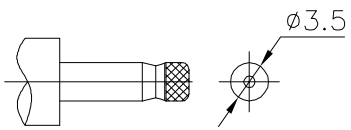

DC MATE PLUG

Rating: 0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal	———	3	Phosphor bronze	Au Plating	———
①	Housing	———	1	Nylon	Black	———

APPROVALS		DATE
DRAWN	J.X.Zhang	2013/11/11
CHECKED		
APPROVALS		

HRO 韩荣® ELECTRONICS CO.,LTD

TITLE:	DC JACKES
PART NO.	DC-092
DRAWING NO.	———

TOLERANCES ARE: 30~以下 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°

UNIT: mm | SCALE: 1:1 | PROJ: | SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	B	———	⚠1	———	———	———
———	A	———	NEW	———	———	———