

# DSK32 THRU DSK320

## 3.0A Surface Mount Schottky Barrier Rectifiers - 20V-200V

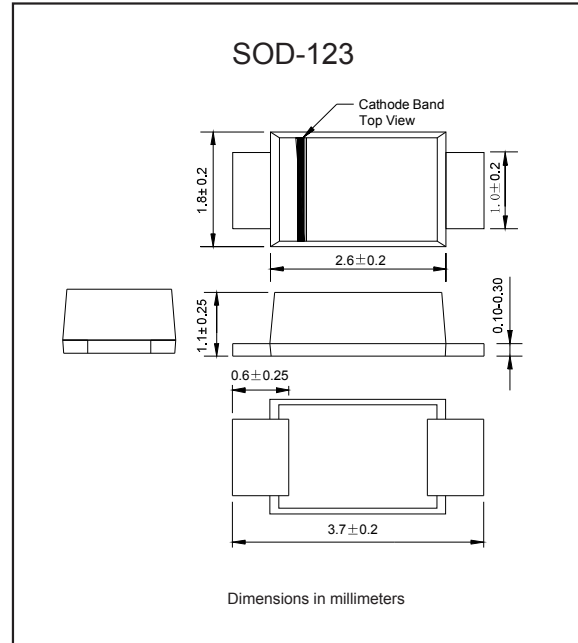
### Features

- ▶ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ▶ Metal silicon junction, majority carrier conduction
- ▶ Low power loss, high efficiency
- ▶ High forward surge current capability
- ▶ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension
- ▶ Compliant to RoHS Directive 2011/65/EU
- ▶ Compliant to Halogen-free

### Mechanical data

- ▶ **Case**: JEDEC SOD-123 molded plastic body
- ▶ **Terminals**: Plated axial leads, solderable per MIL-STD-750, Method 2026
- ▶ **Polarity**: Color band denotes cathode end
- ▶ **Mounting Position**: Any
- ▶ **Weight**: 0.0007 ounce, 0.02 grams

### Package outline



### Maximum ratings and Electrical Characteristics (AT T<sub>A</sub>=25°C unless otherwise noted)

PARAMETER	CONDITIONS	Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current	See Fig.2	I <sub>O</sub>			3.0	A
Forward surge current	8.3ms single half sine-wave (JEDEC methode)	I <sub>FSM</sub>			60	A
Reverse current	V <sub>R</sub> = V <sub>RRM</sub> T <sub>A</sub> = 25°C	I <sub>R</sub>			0.5	mA
	V <sub>R</sub> = V <sub>RRM</sub> T <sub>A</sub> = 100°C				10	
Thermal resistance	Junction to ambient NOTE 1	R <sub>θJA</sub>		88		°C/W
Diode junction capacitance	f=1MHz and applied 4V DC reverse voltage	C <sub>J</sub>		220		pF
Storage temperature		T <sub>STG</sub>	-65		+150	°C

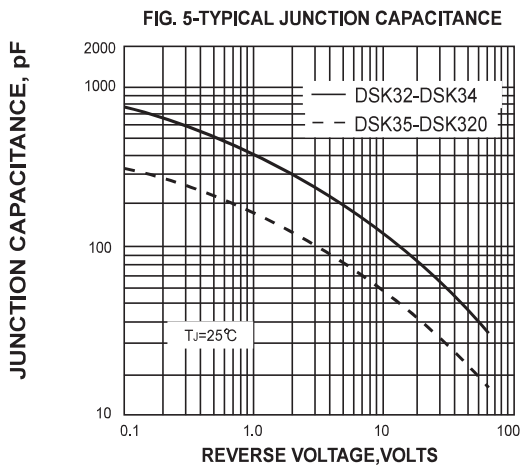
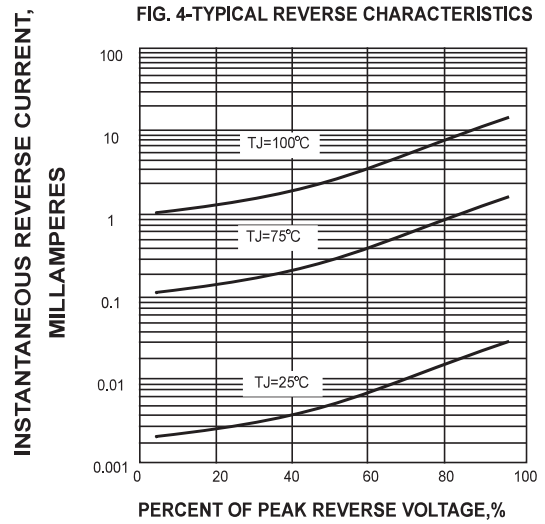
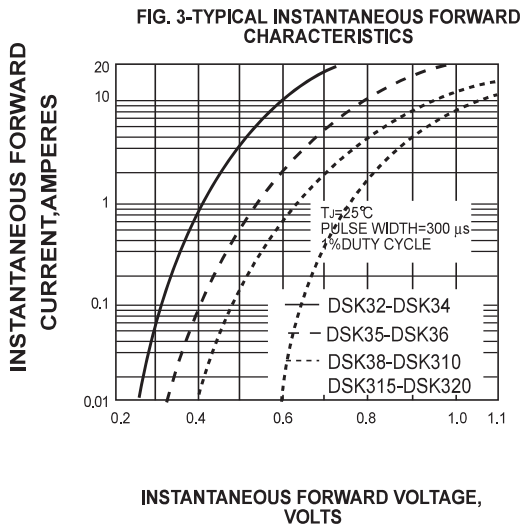
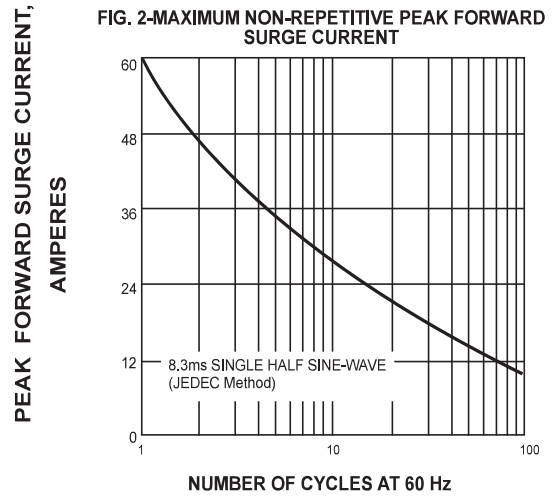
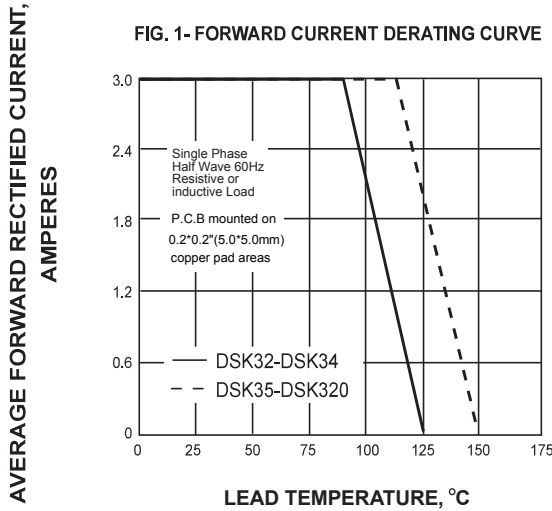
**Note:** 1.P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

SYMBOLS	V <sub>RRM</sub> <sup>*1</sup> (V)	V <sub>RMS</sub> <sup>*2</sup> (V)	V <sub>R</sub> <sup>*3</sup> (V)	V <sub>F</sub> <sup>*4</sup> (V)	Operating temperature T <sub>J</sub> (°C)
DSK32	20	14	20	0.55	-55 to +125
DSK33	30	21	30		
DSK34	40	28	40		
DSK35	50	35	50	0.70	-55 to +150
DSK36	60	42	60		
DSK38	80	56	80	0.85	
DSK310	100	70	100		
DSK315	150	105	150	0.92	
DSK320	200	140	200		

- \*1 Repetitive peak reverse voltage
- \*2 RMS voltage
- \*3 Continuous reverse voltage
- \*4 Maximum forward voltage@I<sub>F</sub>=3.0A



# DSK32 THRU DSK320

## Rating and characteristic curves (DSK32 THRU DSK320)



# DSK32 THRU DSK320

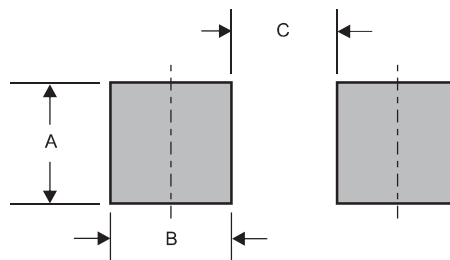
## Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

## Marking

Type number	Marking code
DSK32	32
DSK33	33
DSK34	34
DSK35	35
DSK36	36
DSK38	38
DSK310	30
DSK315	315
DSK320	320

## Suggested solder pad layout



Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-123	0.075 (1.90)	0.055 (1.40)	0.075 (1.90)