

# Wire Wound Chip Common Mode Choke Coil – SDCW-C Series

Operating Temp. : -40°C~+85°C



## FEATURES

- Winding type and low profile
- Prevention of common mode noise at high frequency
- 67Ω~180Ω are optional for different noise level and signal frequency

## APPLICATIONS


- USB2.0 of PC, peripheral equipments, small
- LVDS lines of Note PC, LCD

## PRODUCT IDENTIFICATION

① <u>SDCW</u>	② <u>2012</u>	③ <u>C</u>	④ <u>-2</u>	⑤ <u>-900</u>	⑥ <u>I</u>	⑦ <u>F</u>																																
①	②	③	④	⑤	⑥	⑦																																
<table border="1" style="width: 100%;"> <tr><th colspan="2">Type</th></tr> <tr><td style="width: 20%;">SDCW</td><td>Winding Type Common Mode Choke Coil</td></tr> </table>	Type		SDCW	Winding Type Common Mode Choke Coil	<table border="1" style="width: 100%;"> <tr><th colspan="2">(L×W) (mm)</th></tr> <tr><th colspan="2">External Dimensions (L×W) (mm)</th></tr> <tr><td>2012 [0805]</td><td>2.0×1.3</td></tr> </table>	(L×W) (mm)		External Dimensions (L×W) (mm)		2012 [0805]	2.0×1.3	<table border="1" style="width: 100%;"> <tr><th colspan="2">Code</th></tr> <tr><td style="width: 20%;">C</td><td>Coating</td></tr> </table>	Code		C	Coating	<table border="1" style="width: 100%;"> <tr><th colspan="2">Number of Lines</th></tr> <tr><td colspan="2">2</td></tr> </table>	Number of Lines		2		<table border="1" style="width: 100%;"> <tr><th colspan="2">Impedance</th></tr> <tr><th>Example</th><th>Nominal Value</th></tr> <tr><td>900</td><td>90Ω</td></tr> </table>	Impedance		Example	Nominal Value	900	90Ω	<table border="1" style="width: 100%;"> <tr><th colspan="2">Packing</th></tr> <tr><td style="width: 20%;">T</td><td>Tape &amp; Reel</td></tr> </table>	Packing		T	Tape & Reel	<table border="1" style="width: 100%;"> <tr><th colspan="2">Hazardous Substance Free Products</th></tr> <tr><td colspan="2">F</td></tr> </table>	Hazardous Substance Free Products		F	
Type																																						
SDCW	Winding Type Common Mode Choke Coil																																					
(L×W) (mm)																																						
External Dimensions (L×W) (mm)																																						
2012 [0805]	2.0×1.3																																					
Code																																						
C	Coating																																					
Number of Lines																																						
2																																						
Impedance																																						
Example	Nominal Value																																					
900	90Ω																																					
Packing																																						
T	Tape & Reel																																					
Hazardous Substance Free Products																																						
F																																						

## SHAPE AND DIMENSIONS

### SDCW2012C TYPE

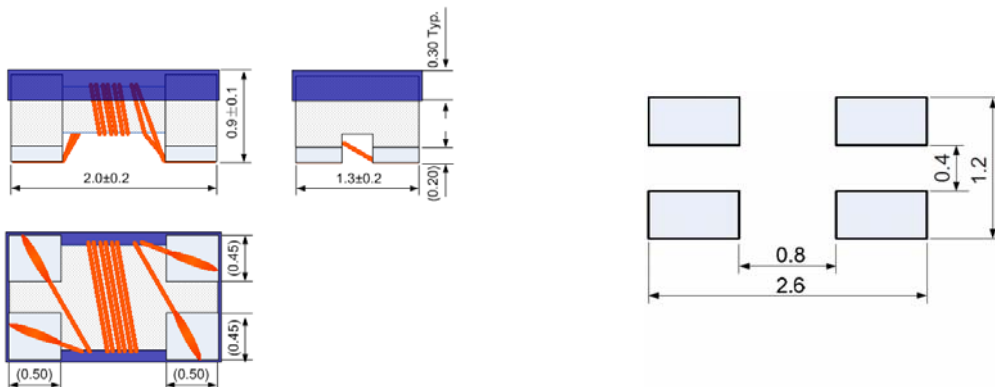


## SPECIFICATIONS

### SDCW2012C TYPE

Part Number	Common Mode Impedance @100MHz	Max. DC Resistance	Max. Rated Current	Rated Voltage	Min. Insulation Resistance
Units	$\Omega$	$\Omega$	mA	Volts	M $\Omega$
Symbol	Z	DCR	I <sub>r</sub>	V <sub>DC</sub>	IR
SDCW2012C-2-670TF	67±25%	0.35	330	50	10
SDCW2012C-2-900TF	90±25%	0.35	330	50	10
SDCW2012C-2-121TF	120±25%	0.45	280	50	10
SDCW2012C-2-181TF	180±25%	0.50	250	50	10

※Products with other electrical characteristics can be provided upon customer's request. Please contact your local sales.

## EQUIVALENT CIRCUIT

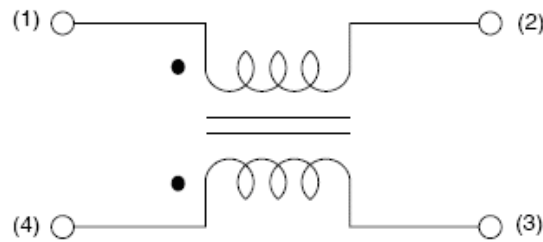

## TYPICAL ELECTRICAL CHARACTERISTICS

Impedance vs. Frequency

