



SB170 thru SB1B0

Schottky Barrier Rectifiers

Reverse Voltage 70V to 100V Forward Current 1.0A Amperes


Features

- Metal-Semiconductor junction with guardring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications



DO-204AL (DO-41)

A-405

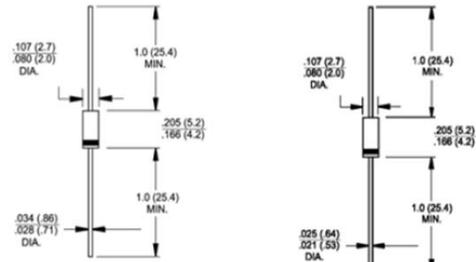

Dimensions in inches and (millimeters) Dimensions in inches and (millimeters)

Note: Lead diameter is 0.025(0.64)/0.021(0.53) for suffix "S" part numbers

Mechanical Data

- Case: JEDEC DO-204AL(DO-41)/A-405 molded plastic
- Polarity: Color band denotes cathode end
- Weight: DO-41-0.012 ounce, 0.33 gram
A-405-0.008 ounce, 0.22 gram
- Mounting position: Any

MAXIMUM RATINGS and ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.


Single phase, half wave, 60HZ, resistive or inductive load.

For capacitive load, derate current by 20%

| PARAMETER | SYMBOL | SB170 | SB180 | SB190 | SB1B0 | UNIT |
|---|-----------------------|---------------|-------|-------|-------|------|
| Maximum repetitive peak reverse voltage | VRRM | 70 | 80 | 90 | 100 | V |
| Maximum RMS voltage | VRMS | 49 | 56 | 63 | 70 | V |
| Maximum DC blocking voltage | VDC | 70 | 80 | 90 | 100 | V |
| Maximum average forward rectified current 0.375"(9.5mm) lead length at T _L =100°C | IF(AV) | 1.0 | | | | A |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load | IFSM | 30 | | | | A |
| Maximum forward voltage at 1A DC T _A =25°C T _A =100°C | VF | 0.79 0.69 | | | | V |
| Maximum DC reverse current at rated DC blocking voltage ⁽¹⁾ | T _J =25°C | 0.05 | | | | mA |
| | T _J =125°C | 1 | | | | |
| Typical junction capacitance (Note 1) | C _j | 30 | | | | pF |
| Typical thermal resistance(Note 2) | R _{θJA} | 76 | | | | °C/W |
| | R _{θJC} | 41 | | | | |
| | R _{θJL} | 32 | | | | |
| Operating junction temperature range | T _J | - 55 to + 150 | | | | °C |
| storage temperature range | T _{STG} | - 55 to + 150 | | | | °C |

Notes: 1. Measured at 1.0 MHZ and applied reverse voltage of 4.0V DC

2. Thermal Resistance at .375(9.5mm) Lead Length, PC Board Mounted



GOOD-ARK

SB170 thru SB1B0

Schottky Barrier Rectifiers

Reverse Voltage 70V to 100V Forward Current 1.0A Amperes

RATINGS AND CHARACTERISTICS CURVES

FIG.1 - FORWARD CURRENT DERATING CURVE

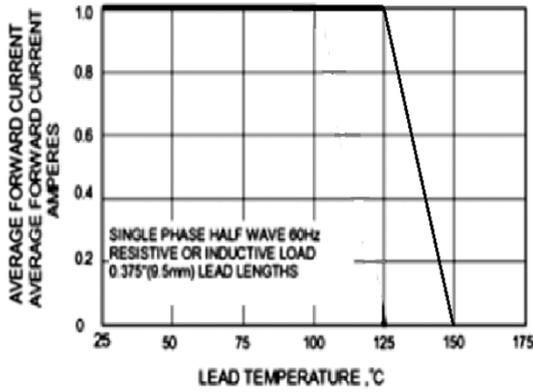


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

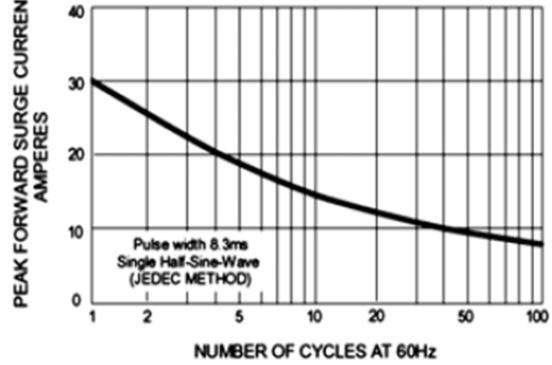


FIG.3 - TYPICAL JUNCTION CAPACITANCE

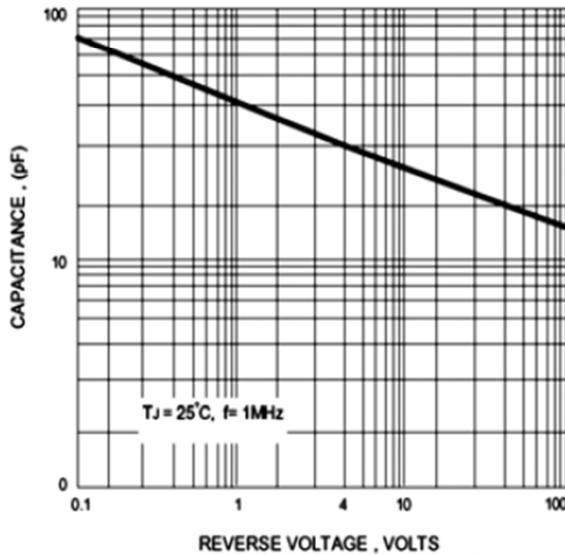


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

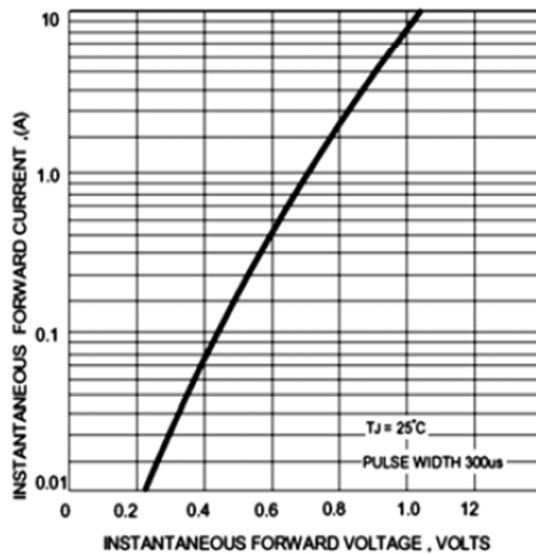


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

