

CC6920B

High Performance, Hall Effect-Based Current Sensor IC with a Low-Resistance Conductor 2.5A / 5A / 10A / 20A / 25A / 30A / 40A / 50A series

GENERAL DESCRIPTION

The CC6920B device is a high-performance current sensor based on Hall Effect. The device provides precise and economical solutions for AC or DC current sensing in industrial, commercial and communication equipment. It is provided in a small, surface mount SOP8 package with current sensing range of 2.5A/5A/10A/20A/25A/30A/40A/50A. Customers can easily complete their PCB design and implementation.

The CC6920B device consists of a precise, low-offset, linear Hall circuit with a copper conduction path located near the surface of the die. When current flows through the copper conduction path, a magnetic field generates. Meanwhile the Hall circuit converts this magnetic signal to output voltage signal. Internal copper conductor's resistance is typical 0.9m Ω , which provides much less power loss than the universal resistor sampling method. Otherwise, its internal inherent insulation provides 424V_{RMS} basic working isolation voltage and 3500V_{RMS} insulation withstand voltage between the input current path and the secondary circuit.

The Hall circuit based on BiCOMS process integrates a high sensitivity Hall element, oscillator, Hall signal pre-amplifier, CrossChip® patented temperature compensation circuit, dynamic offset cancellation circuit, sensitivity trimming circuit and output amplifier.

Zero current output voltage is 50%VCC. When power supply voltage is 3.3V, the linear output voltage range is 0.2~4.8V, the linearity can reach 0.1%.

It's operating ambient temperature range is -40~125°C. Comply with RoHS requirements.

FEATURES

- ◆ Zero current output voltage is 50%VCC
- ◆ Current sensing range available: 2.5A/5A/10A/20A/25A/30A/40A/50A
- ◆ High isolation and withstand voltage (3500V_{RMS} isolation voltage between pins 1-4 and 5-8)
- ◆ Less power loss, internal conductor's resistance is 0.9m Ω
- ◆ High bandwidth, up to 250kHz
- ◆ 1.2 μ s output rise time in response to step input current
- ◆ Total output error \pm 0.5% at T_a=25°C and \pm 3% at T_a=-40~125°C
- ◆ CrossChip® patented temperature compensation
- ◆ Outputs desensitized to mechanical stress
- ◆ Differential Hall structure, strong resistance to external magnetic interference
- ◆ ESD (HBM) 4000V
- ◆ Operating ambient temperature: -40~125°C

APPLICATIONS


- ◆ Motor controller
- ◆ Load detection and management
- ◆ Switch-mode power supplies
- ◆ Over-current fault protection
- ◆ Other applications requiring current detection




Certificate Number
LVD: AN 50544137 001
TUV MARK: R 50531528



Certificate Number
E526186




FUNCTION BLOCK DIAGRAM

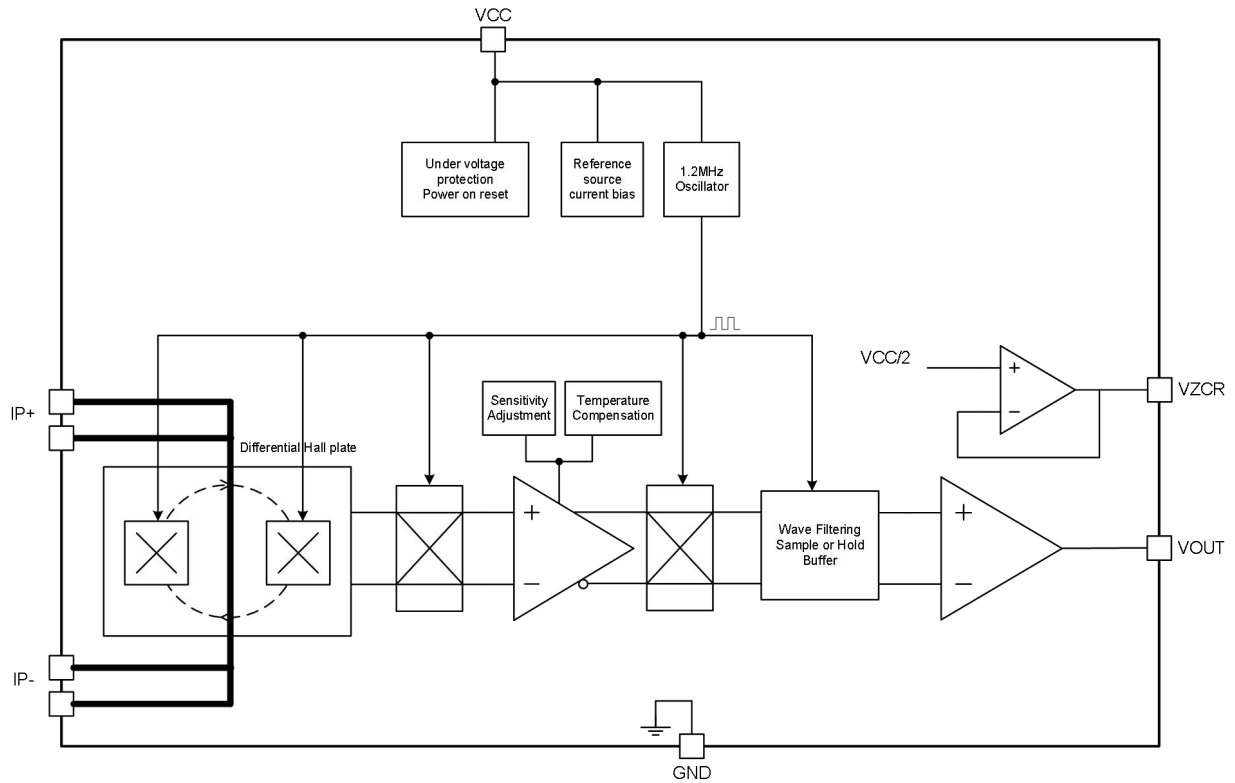

ORDERING INFORMATION

Part No.	SENS. (mV/A)	Package	Packing Form
CC6920BSO-2.5A	528	SOP8	tape reel, 2000 pcs/reel
CC6920BSO-5A	264	SOP8	tape reel, 2000 pcs/reel
CC6920BSO-10A	132	SOP8	tape reel, 2000 pcs/reel
CC6920BSO-20A	66	SOP8	tape reel, 2000 pcs/reel
CC6920BSO-25A	52.8	SOP8	tape reel, 2000 pcs/reel
CC6920BSO-30A	44	SOP8	tape reel, 2000 pcs/reel
CC6920BSO-40A	33	SOP8	tape reel, 2000 pcs/reel
CC6920BSO-50A	26.4	SOP8	tape reel, 2000 pcs/reel
CC6920SO-XXA (Note1)	-	SOP8	tape reel, 2000 pcs/reel

Note1 : When XXA is within the range of 50A, customers can customize the range according to their needs.

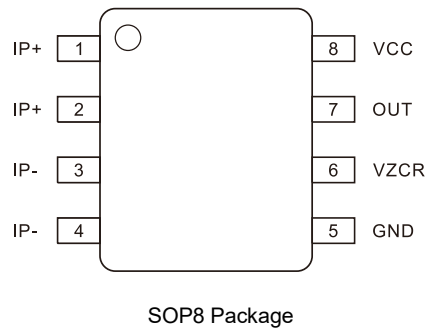PINOUT DIAGRAM


Name	Number	Description	Name	Number	Description
IP+	1	Current Sampled +	GND	5	Ground
IP+	2	Current Sampled +	VZCR	6	Zero Current Reference Signal Output
IP-	3	Current Sampled -	OUT	7	Analog Voltage Output
IP-	4	Current Sampled -	VCC	8	Power Supply

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Power Supply	V_{CC}	7	V
Output Voltage	V_{OUT}	-0.3~ $V_{CC}+0.3$	V
Output Source Current	$I_{OUT(SOURCE)}$	6	mA
Output Sink Current	$I_{OUT(SINK)}$	30	mA
Input current peak current (3 s)	I_{PEAK}	100	A
Input current continuous current	I_{CON}	40	A
Isolation Voltage	V_{ISO}	3500	VAC
Operating Ambient Temperature	T_a	-40~125	°C
Junction Temperature	T_J	165	°C
Storage Temperature	T_S	-55~150	°C
Magnetic Flux Density	B	Not Limited	mT
Electrostatic Discharge Voltage (HBM)	ESD(HBM)	4000	V

Note: Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

ISOLATION CHARACTERISTICS

Parameter	Symbol	Test Conditions	Value	Unit
Withstand isolation voltage	V_{ISO}	Test method: 50 / 60Hz, 1min	3500	V_{RMS}
	V_{TEST}	$t = 1s$ (100% production)	3900	V_{RMS}
Working voltage of basic insulation	V_{WFSI}	Basic insulation UL standard 62368-1:2014	600	V_{PK}
			424	V_{RMS}
Clearance	D_{cl}	minimum distance through air from IP leads to signal leads	3.8	mm

Continued:

Parameter	Symbol	Test Conditions	Value	Unit
Maximum repetitive peak isolation voltage	V_{IORM}	AC voltage (bipolar)	600	V_{PK}
Maximum working isolation voltage	V_{IOWM}	AC voltage (sine wave)	424	V_{RMS}
		DC voltage	600	V_{DC}
Maximum transient isolation voltage	V_{IOTM}	Test method: $t = 60s$ (qualification)	4949	V_{PK}
	V_{TEST}	$t = 1s$ (100% production)	5515	
Maximum surge isolation voltage (Note 1)	V_{IOSM}	Tested 1.2 μs (rise) / 50 μs (width) One time	7000	V_{PK}
Surge Current (Note 2)	I_{SURGE}	Tested in compliance to IEC 61000-4-5 8 μs (rise) / 20 μs (width)	7.5	kA

Note1: Testing is carried out in air to determine the intrinsic surge immunity of the isolation barrier.

Note2: Certification pending.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Min.	Max.	Unit
Input voltage (Note 1)	V_{IN+}, V_{IN-} (Note 1)	-600	600	V_{PK}
Input current (DC / AC RMS) (Note 2)	I_P	-50	50	A
Power Supply	V_{CC}	3.0	3.6	V
Operation Temperature	T_A	-40	125	$^{\circ}C$

Note 1: V_{in+} , V_{IN-} refers to the voltage of current input pins I_P+ and I_P- , relative to pin 5 (GND).

Note 2: Decrease due to higher ambient temperature.

ELECTRICAL PARAMETERS ($T_a=25^{\circ}C$ and $V_{CC}=3.3V$, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Supply	V_{CC}	-	3.0	3.3	3.6	V
Supply Current	I_{CC}	OUT pin floated	-	20	25	mA
Internal benchmark	V_{ZCR}		-	1.65	-	V
Zero Current Output Voltage	$V_{OUT(O)}$	$I_P=0$	-	1.65	-	V
Output Capacitance Load	C_L		-	-	1	nF
Output Resistive Load	R_L		1.5	-	-	k Ω
Res. of Primary Conductor	R_P	$I_P=2A$	-	0.9	1.2	m Ω
Propagation Time	t_b			1	2	μs
Rise Time	t_r		-	1	2.2	μs
Common Mode Rejection Ratio	CMRR		38	-	-	dB
Bandwidth	BW	-3dB	250	-	-	kHz
Reference Output Source Current	$I_{ZCR(SOURCE)}$		-	-	400	μA
Reference Output Sink Current	$I_{ZCR(SINK)}$		-	-	3000	μA
Nonlinearity	Lin_{ERR}		-	0.1	0.5	%
Symmetry	Sym_{ERR}		-	0.5	1.5	%
Power-on Time	T_{POR}	Output rising from 0 to 90% of steady-state	-	10	-	μs

2.5A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-2.5	-	2.5	A
Sensitivity	Sens	full range of I_P	512	528	544	mV/A
Zero Current Differential Output Error	V_{OE}		-32		32	mV
Noise	$V_{N(RMS)}$		-	59	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.22	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.084	-	mV/A/°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%

5A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-5	-	5	A
Sensitivity	Sens	full range of I_P	258	264	270	mV/A
Zero Current Differential Output Error	V_{OE}		-30		30	mV
Noise	$V_{N(RMS)}$		-	30	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.22	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.042	-	mV/A/°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%

10A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-10	-	10	A
Sensitivity	Sens	full range of I_P	127	132	135	mV/A
Zero Current Differential Output Error	V_{OE}		-27		27	mV
Noise	$V_{N(RMS)}$		-	15	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.22	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.021	-	mV/A/°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%

20A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-20	-	20	A
Sensitivity	Sens	full range of I_P	63	66	69	mV/A
Zero Current Differential Output Error	V_{OE}		-17		17	mV
Noise	$V_{N(RMS)}$		-	7	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.22	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.011	-	mV/A/°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%

25A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-25	-	25	A
Sensitivity	Sens	full range of I_P	51	52.8	54	mV/A
Zero Current Differential Output Error	V_{OE}		-14		14	mV
Noise	$V_{N(RMS)}$		-	6	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.22	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.008	-	mV/A /°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%

30A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-30	-	30	A
Sensitivity	Sens	full range of I_P	42	44	46	mV/A
Zero Current Differential Output Error	V_{OE}		-10		10	mV
Noise	$V_{N(RMS)}$		-	6	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.18	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.007	-	mV/A /°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%


40A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-40	-	40	A
Sensitivity	Sens	full range of I_P	32	33	34	mV/A
Zero Current Differential Output Error	V_{OE}		-7		7	mV
Noise	$V_{N(RMS)}$		-	6	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.14	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.005	-	mV/A /°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%


50A PERFORMANCE CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Current Accuracy Range	I_P	-	-50	-	50	A
Sensitivity	Sens	full range of I_P	25	26.4	27	mV/A
Zero Current Differential Output Error	V_{OE}		-7		7	mV
Noise	$V_{N(RMS)}$		-	6	-	mV
Zero Current Output Slope	$\Delta V_{OUT(Q)}$		-	0.11	-	mV/°C
Sensitivity Slope	$\Delta SENS$		-	0.004	-	mV/A /°C
Total Output Error	E_{TOT}		-2.0	-	2.0	%

TYPICAL APPLICATION CIRCUITS

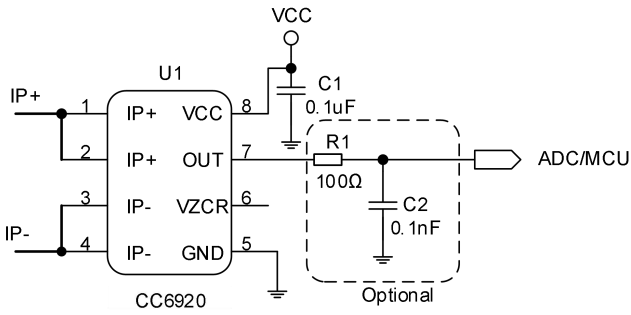


Typical Output Application

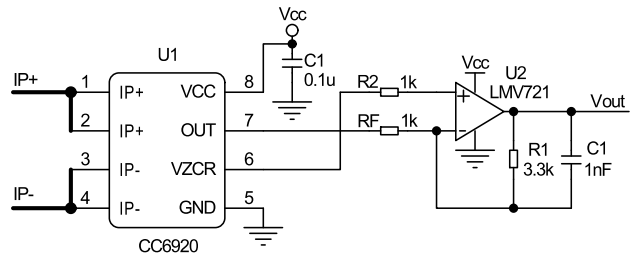


Gain amplifier application


Note: output direction of Vout

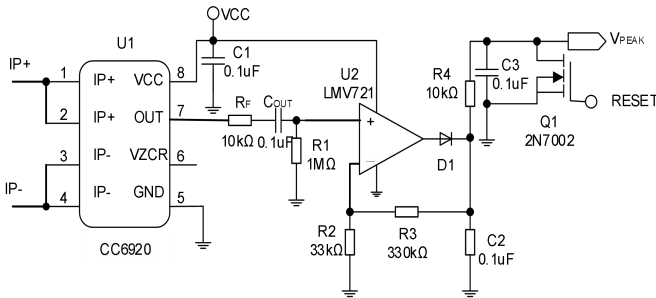


Peak Current Detection

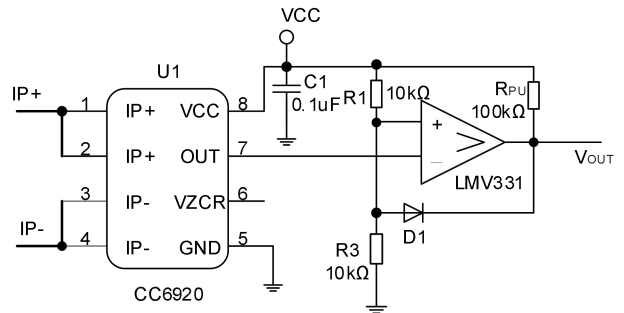

Over Current Fault Latch

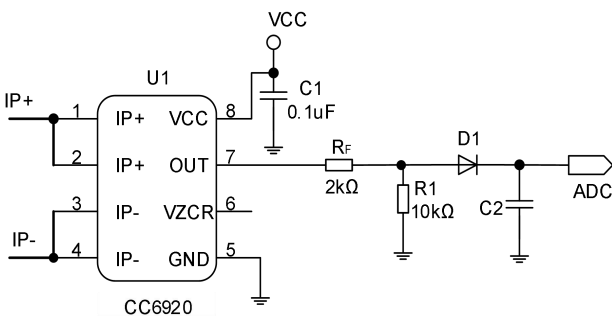


Rectifier output, instead of current transformer application

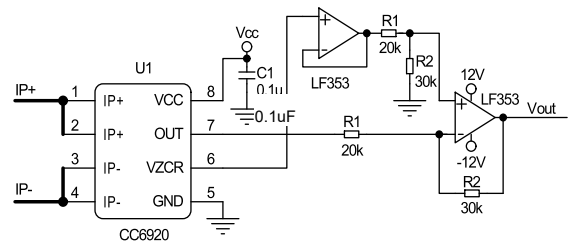

Zero Migration Application

TYPICAL APPLICATION CIRCUITS

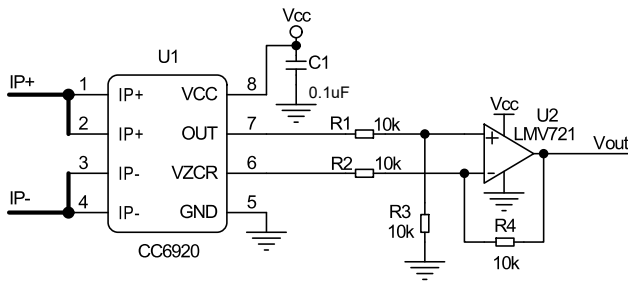

Application of single source zero shift with unidirectional current

Note: the output current of IZCR is < 0.4mA. It is suggested that 0.3mA should be reserved in design.

Function Description

The CC6920B device is a precision current sensor based on Hall sensor. It has 424V_{RMS} basic isolated working voltage, less than 3% full scale error and zero current reference signal output in the whole temperature range, which can realize unidirectional or bidirectional current detection. The input current flows through a wire between isolated input current pins, which has a resistance of 0.9 mΩ at room temperature to reduce insertion loss. The magnetic field generated by the input current is sensed by Hall sensor and amplified by precise signal chain. It can be used for AC and DC current measurement with a bandwidth of 250kHz. The measuring current is 2.5-50A. There are 8 kinds of Current sensing range to choose. It can work under single power supply of 3.0V to 3.6V. CC6920B is optimized for high accuracy and temperature stability, compensating for misalignment and sensitivity over the entire range.

The input current of CC6920B flows through the primary side of the package through IP + and IP – pins, the current flowing through the chip generates a magnetic field proportional to the input current and is measured by an isolated Precision Hall sensor IC. Compared with other current measurement methods, the low impedance lead frame path reduces power consumption and does not require any external devices on the primary side. In addition, the internal integrated differential common mode suppression circuit can make the chip output not affected by external interference magnetic signal, and only measure the magnetic field generated by the input current, so as to suppress the interference of external magnetic field.

The typical resistance of the primary current input conductor at 25 ° C is 0.9 mΩ. The lead frame is made of copper. The temperature coefficient of the input wire is positive, and the wire resistance increases with the increase of temperature. The typical temperature coefficient is 3300 ppm/° C. For every 100 ° C increase in temperature, the primary side resistance will increase by 33%.

Input Current

In use, the primary side of the chip (package pins 1-4) is connected in series at any position in the whole circuit. The input current flowing from IP + (package pins 1-2) to IP - (package pins 3-4) is positive, otherwise it is negative. Do not shunt resistors between IP + and IP -, unless there are very special reasons - such as minimizing insertion loss - which will reduce the current flowing through the chip, and the wire resistance will also be affected by temperature drift, which requires external temperature and precision correction of the whole system.

Output Characteristic

The static output point (IP = 0A) of CC6920B is VCC / 2.



When the current increases, the V_{OUT} increases until the saturation voltage of the output operational amplifier (VCC – rail voltage); when the current decreases, the V_{OUT} decreases until the saturation voltage (GND + rail voltage) of the Output Op Amp. Crosschip ensures the accuracy and linearity of V_{OUT} in the range of 0.33 ~ 2.97V. In order to ensure the consistency of mass manufacturing, there is a certain margin in this range, but it is not recommended for customers to use this margin.

When the input current exceeds the range, the output of V_{OUT} is close to the rail voltage of the power supply. When the input current does not exceed the tolerance limit of the chip, the voltage will always be maintained. After the input current returns to the range, the output of V_{OUT} will return to normal without any damage to the chip.

Product Name	Input Current	Sensitivity (mV/A)	Calculation Formula (Note 1)
CC6920BSO-2.5A	-2.5A ~ +2.5A	528	$V_{OUT} = VCC / 2 + 0.528 \times I_P(A) \dots (V)$
CC6920BSO-5A	-5A ~ +5A	264	$V_{OUT} = VCC / 2 + 0.264 \times I_P(A) \dots (V)$
CC6920BSO-10A	-10A ~ +10A	132	$V_{OUT} = VCC / 2 + 0.132 \times I_P(A) \dots (V)$
CC6920BSO-20A	-20A ~ +20A	66	$V_{OUT} = VCC / 2 + 0.066 \times I_P(A) \dots (V)$
CC6920BSO-25A	-25A ~ +25A	52.8	$V_{OUT} = VCC / 2 + 0.0528 \times I_P(A) \dots (V)$
CC6920BSO-30A	-30A ~ +30A	44	$V_{OUT} = VCC / 2 + 0.044 \times I_P(A) \dots (V)$
CC6920BSO-40A	-40A ~ +40A	33	$V_{OUT} = VCC / 2 + 0.033 \times I_P(A) \dots (V)$
CC6920BSO-50A	-50A ~ +50A	26.4	$V_{OUT} = VCC / 2 + 0.0264 \times I_P(A) \dots (V)$

Note : the formula is only applicable to DC current calculation. When AC current is applied, pay attention to $I_{PEAK} = 1.414 \times I_{RMS}$ and the positive & negative current direction.

Relationship between Package Temperature & Input Current

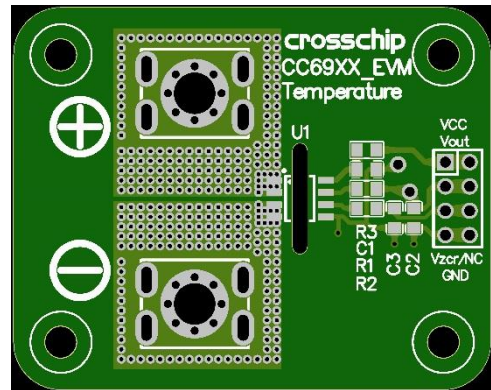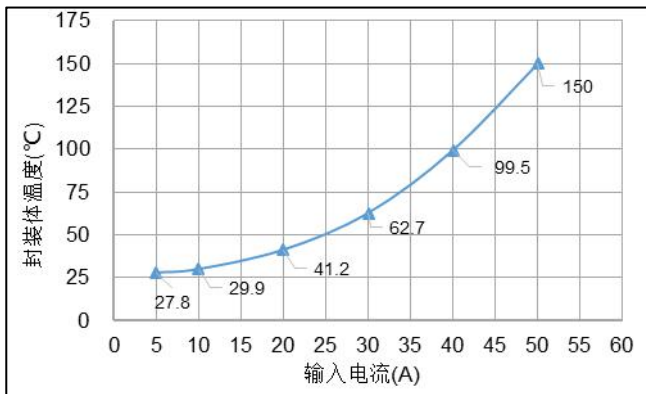


Input Current (IP) vs. Package temperature

Note: Based on the demo board test, for specific applications, it is necessary to strengthen the heat dissipation according to the actual application scenario or select the board with high Tg.


For example: Temperature tests shall be considered for the specific installation conditions in end system which needs a cooling system that can provide wind speeds of at least 10.8 m/s.

Thickness: 1.6mm, FR-4 double-sided plate, 2oz copper foil total 1200m2

Test environment: open environment, stagnant air

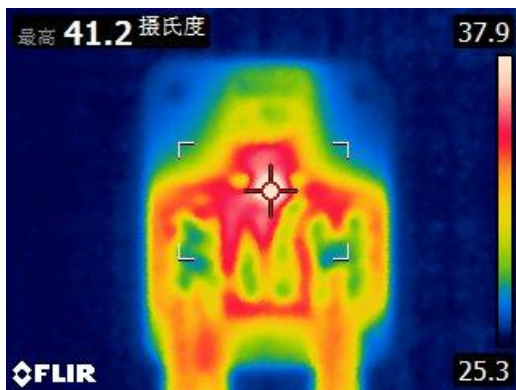


Package Thermography (Input Current 20A)

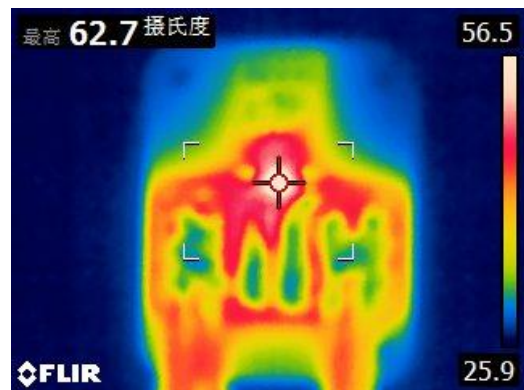

Package Thermography (Input Current 30A)




Package Thermography (Input Current 40A)

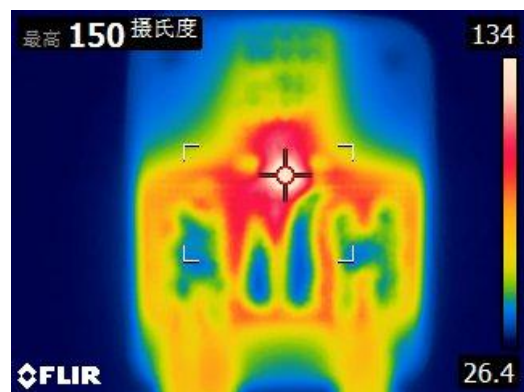


Package Thermography (Input Current 50A)

Curve & Waveform

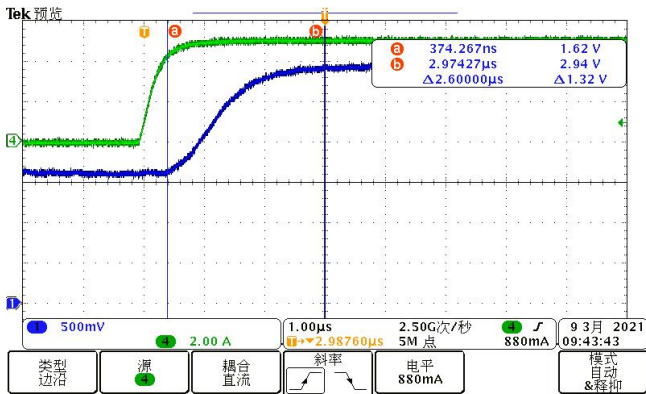


V_{OUT} vs IP (5A)

(Positive Current Rising Edge Response)

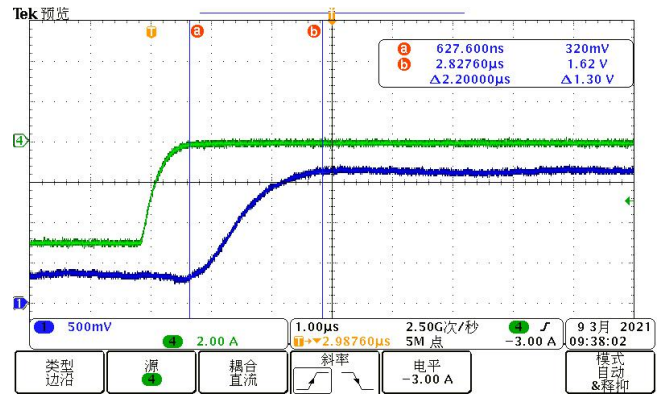


V_{OUT} vs IP (5A)

(Negative Current Rising Edge Response)

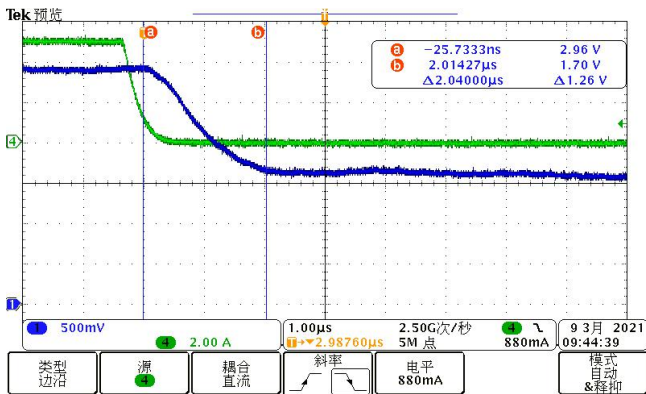

V_{OUT} vs IP (5A)


(Positive Current Falling Edge Response)

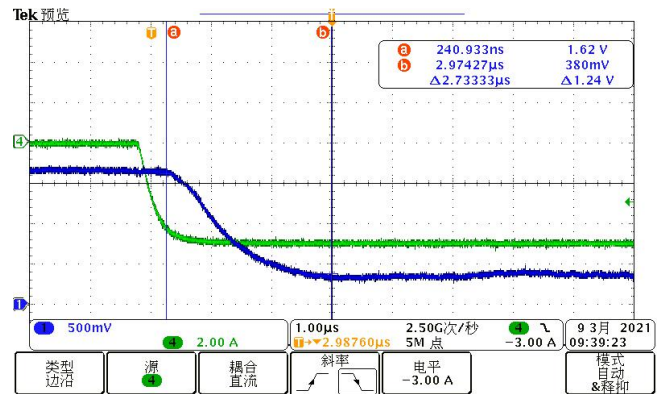

V_{OUT} vs IP (5A)


(Negative Current Falling Edge Response)

Curve & Waveform

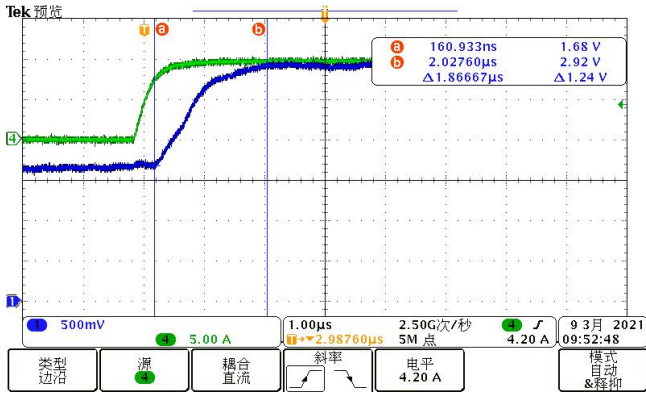


V_{OUT} vs IP (10A)

(Positive Current Rising Edge Response)

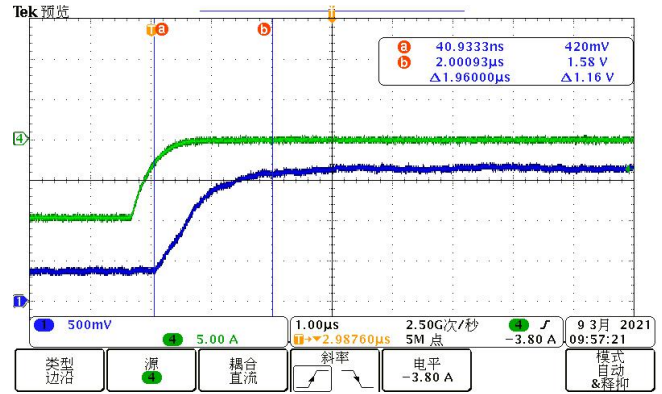


V_{OUT} vs IP (10A)

(Negative Current Rising Edge Response)

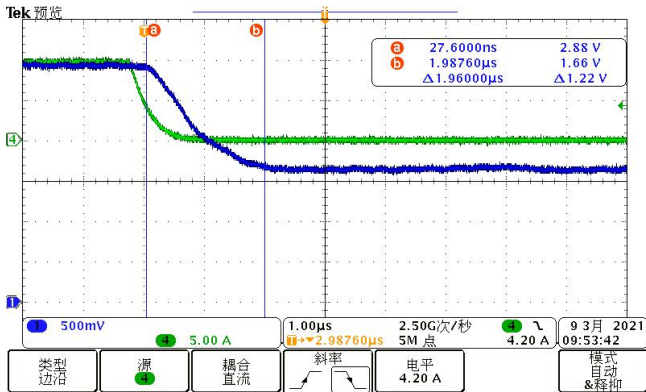

V_{OUT} vs IP (10A)


(Positive Current Falling Edge Response)

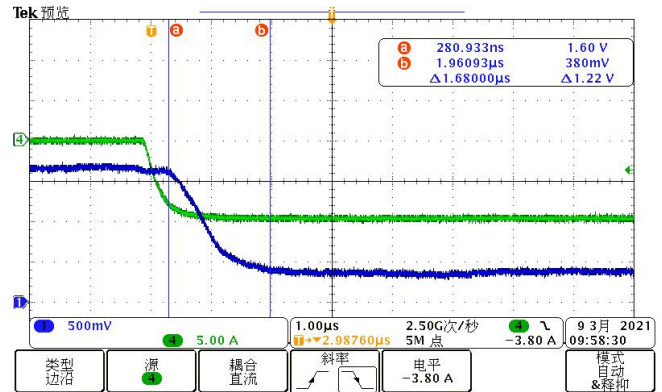

V_{OUT} vs IP (10A)


(Negative Current Falling Edge Response)

Curve & Waveform

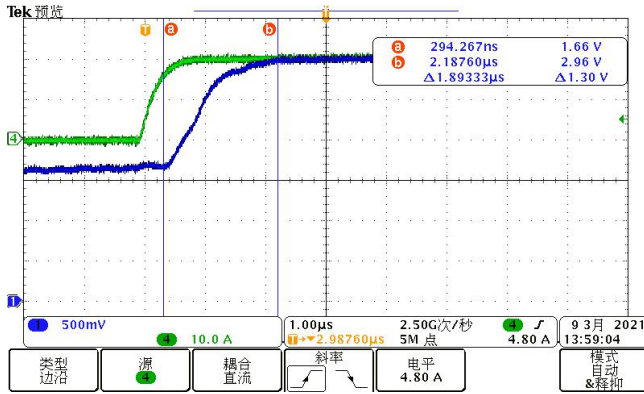


V_{OUT} vs IP (20A)

(Positive Current Rising Edge Response)

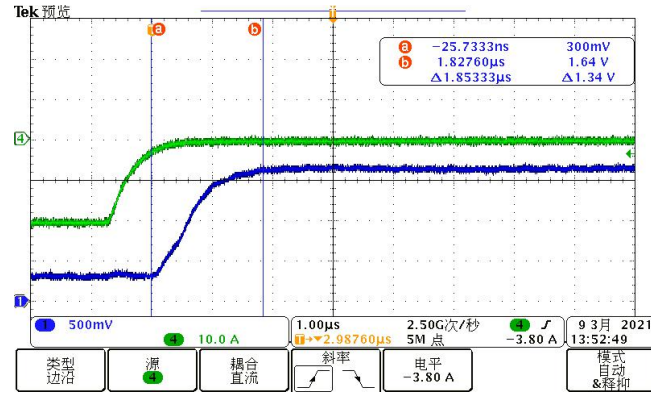


V_{OUT} vs IP (20A)

(Negative Current Rising Edge Response)

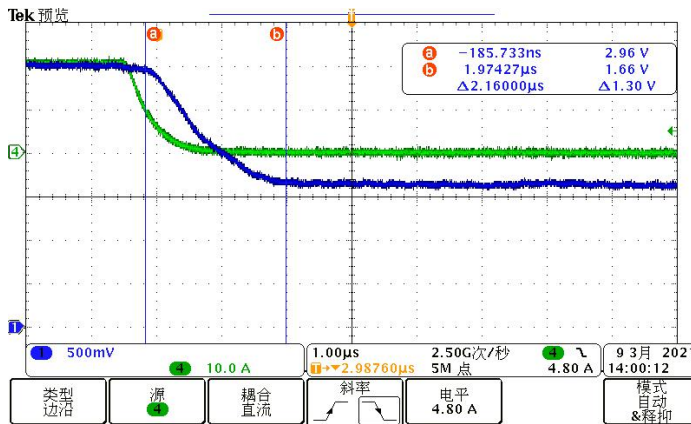

V_{OUT} vs IP (20A)


(Positive Current Falling Edge Response)

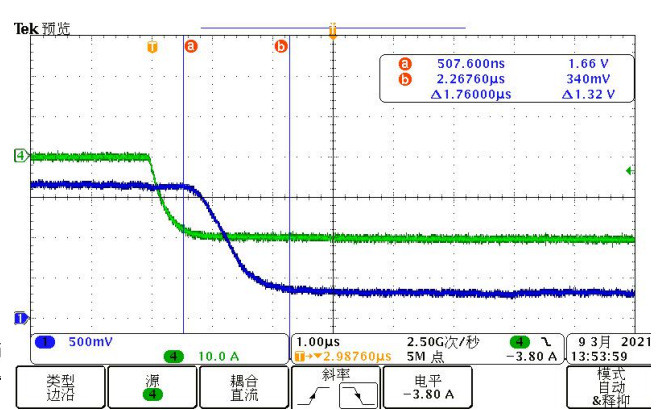

V_{OUT} vs IP (20A)


(Negative Current Falling Edge Response)

Curve & Waveform

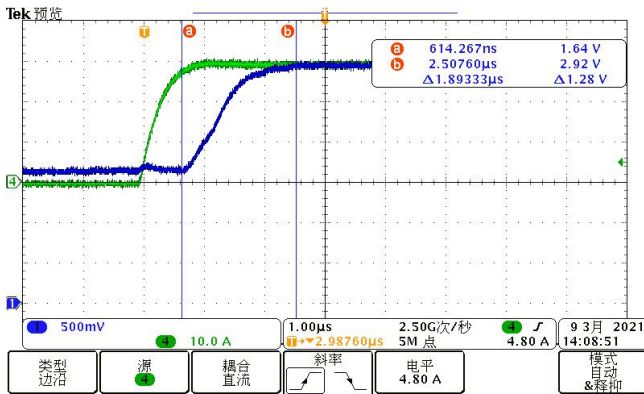


V_{OUT} vs IP (30A)

(Positive Current Rising Edge Response)

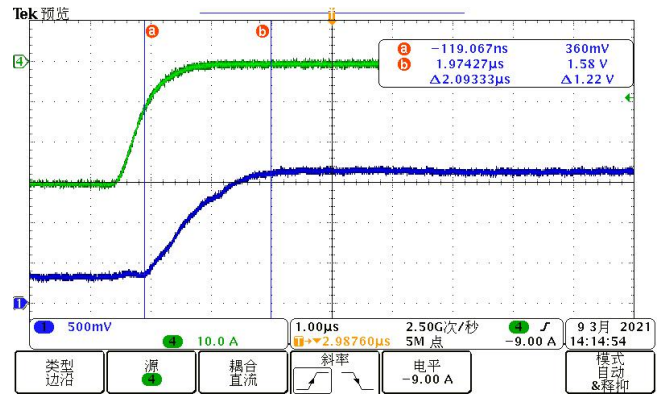


V_{OUT} vs IP (30A)

(Negative Current Rising Edge Response)

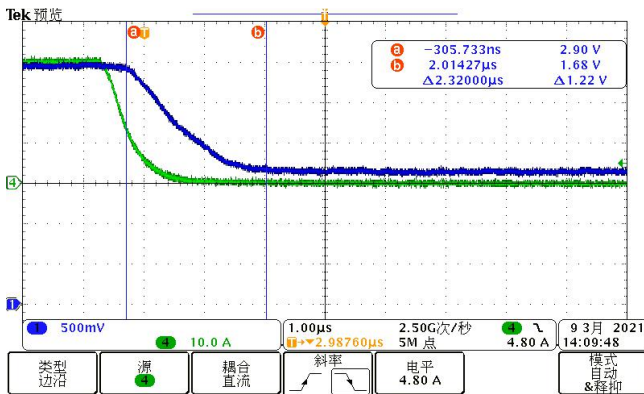

V_{OUT} vs IP (30A)


(Positive Current Falling Edge Response)

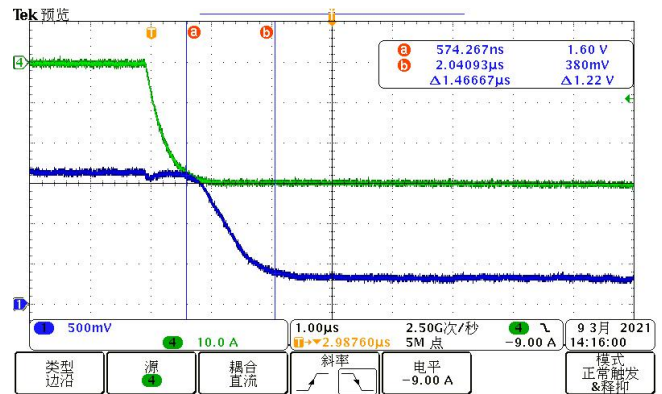

V_{OUT} vs IP (30A)


(Negative Current Falling Edge Response)

Curve & Waveform

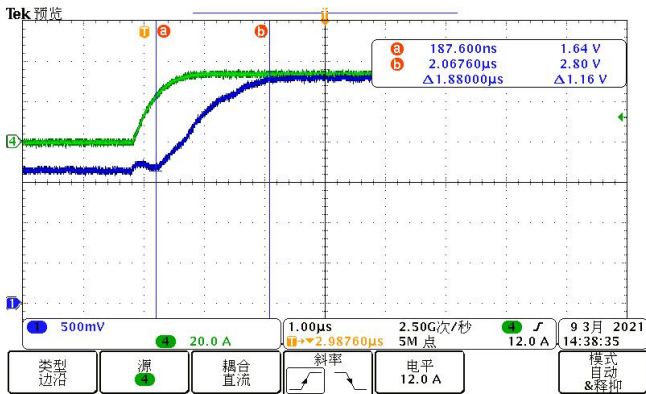


V_{OUT} vs IP (40A)

(Positive Current Rising Edge Response)

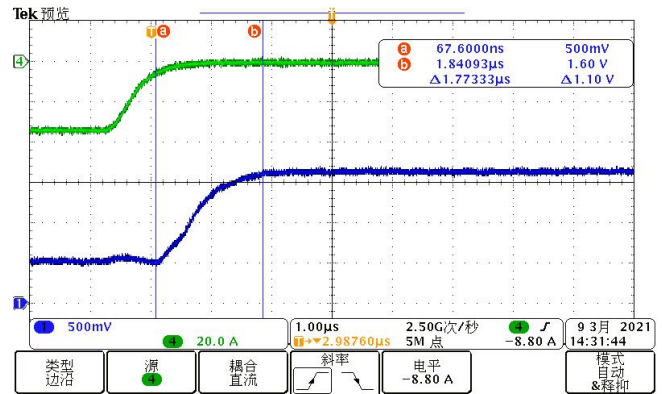


V_{OUT} vs IP (40A)

(Negative Current Rising Edge Response)

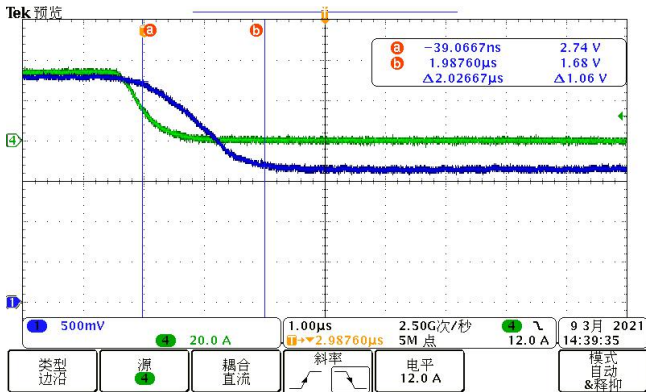

V_{OUT} vs IP (40A)


(Positive Current Falling Edge Response)

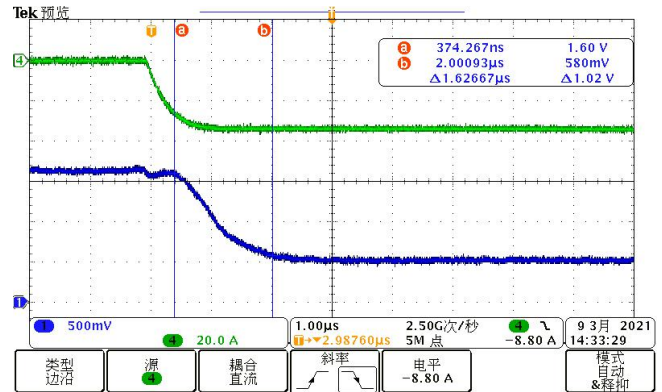


V_{OUT} vs IP (40A)

(Negative Current Falling Edge Response)


10A Series

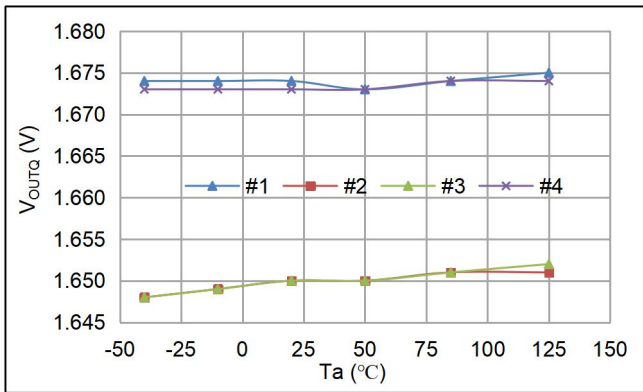


VoutQ vs. Ta

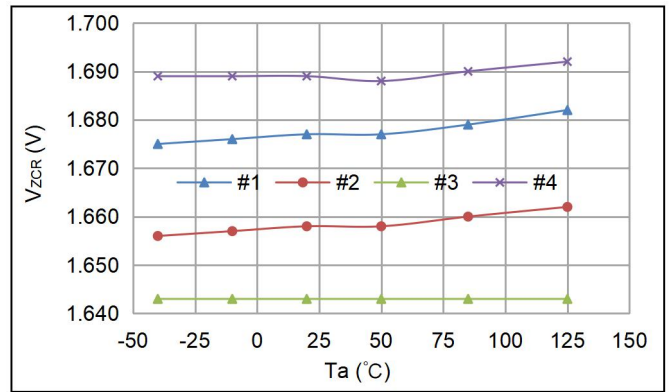


VzCR vs. Ta

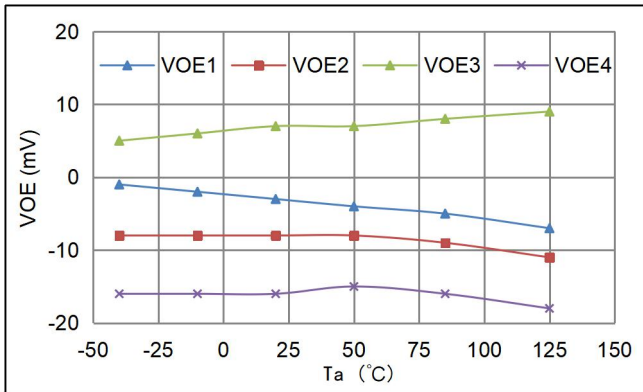


Voe vs. Ta

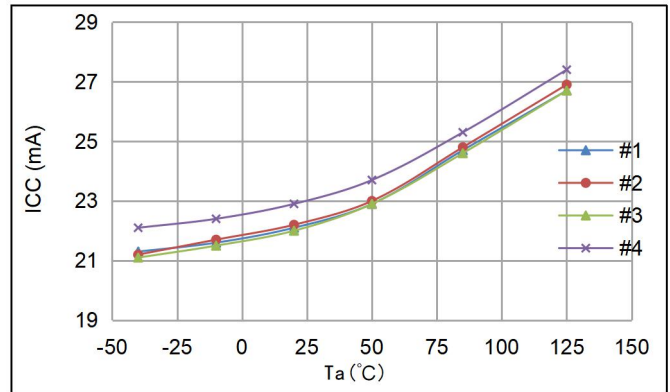

ICC vs. Ta

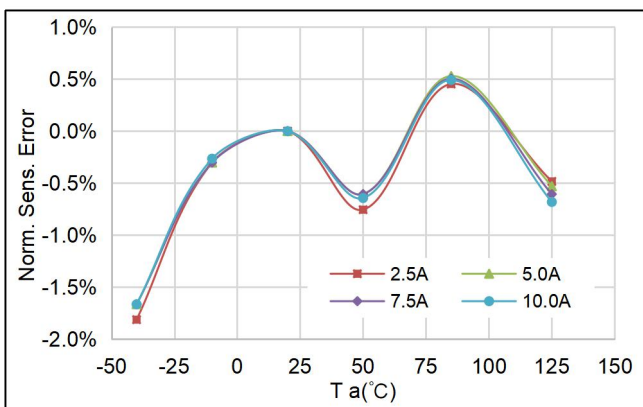


Sens error vs. Ta

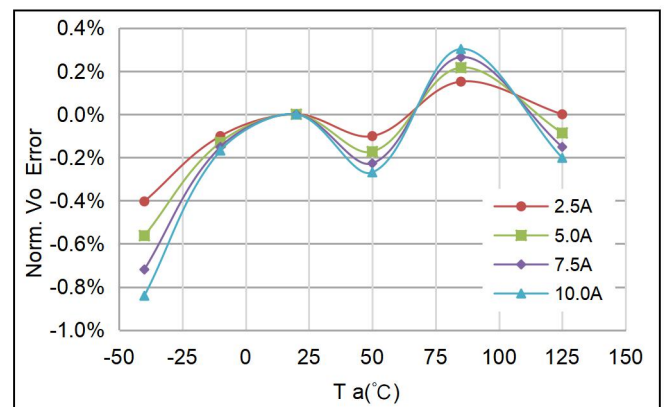


Vout error vs. Ta


20A Series

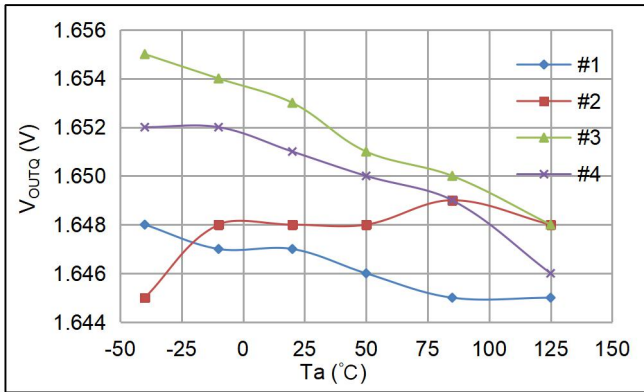


V_{outQ} vs. T_a

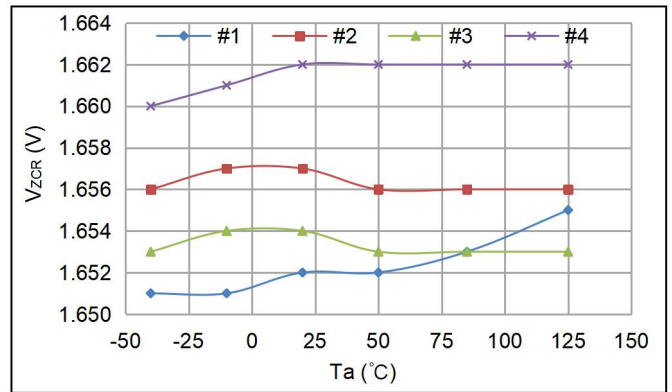


V_{zCR} vs. T_a

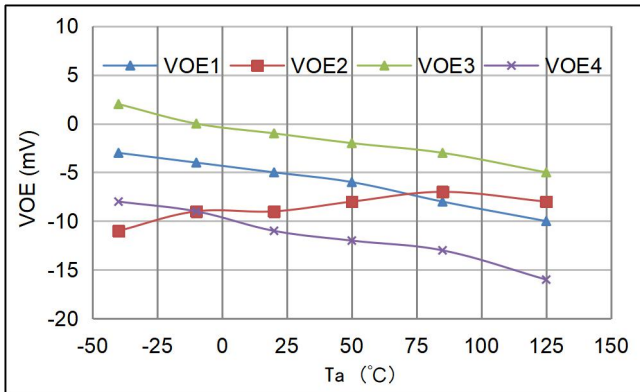


VOE vs. T_a

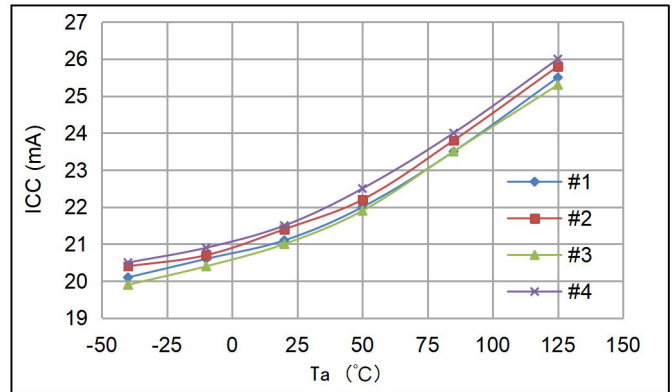

ICC vs. T_a

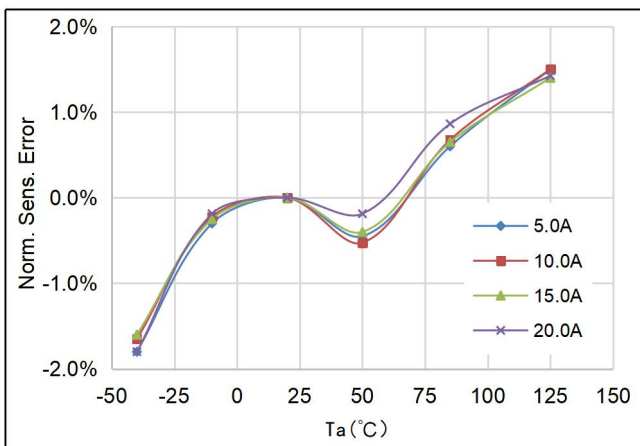


Sens error vs. T_a

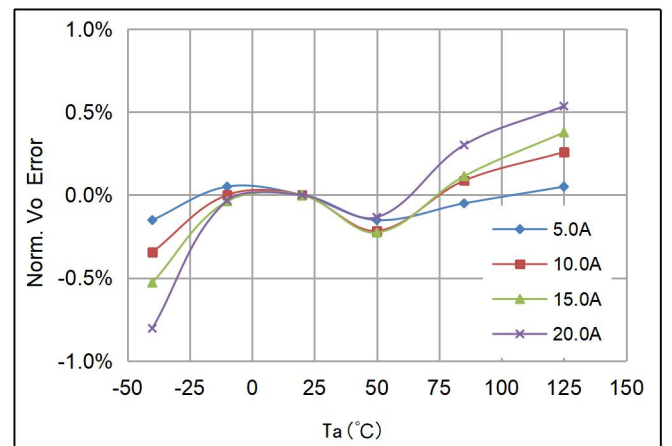


V_{out} error vs. T_a


30A Series

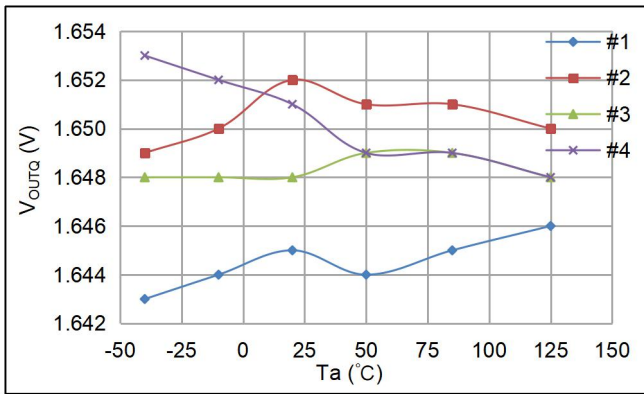


V_{outQ} vs. T_a

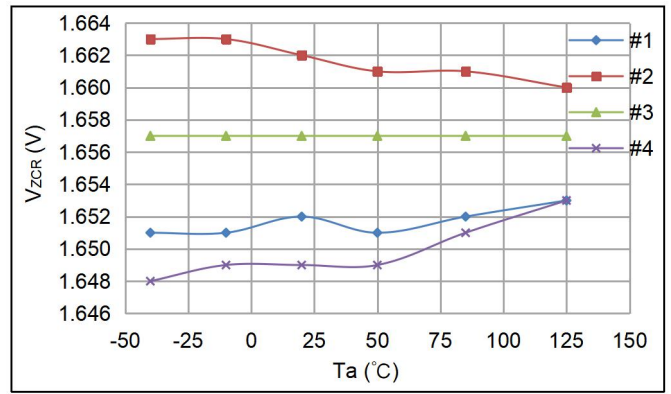


V_{zCR} vs. T_a

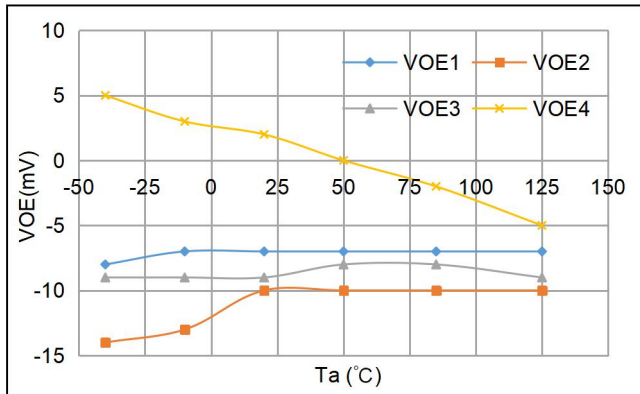


V_{OE} vs. T_a

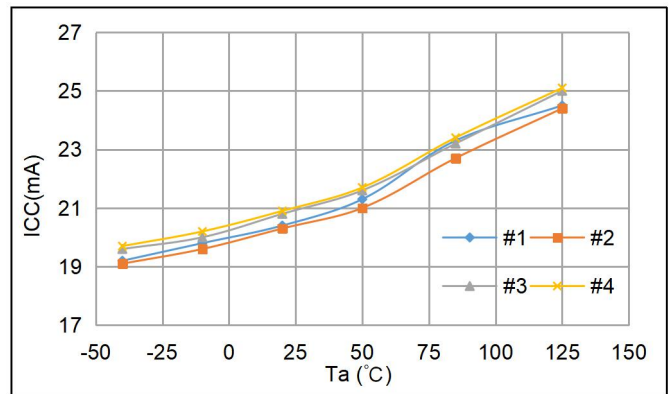

ICC vs. T_a

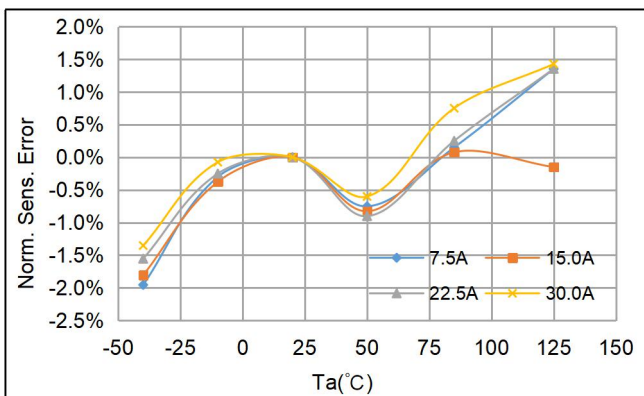


Sens error vs. T_a

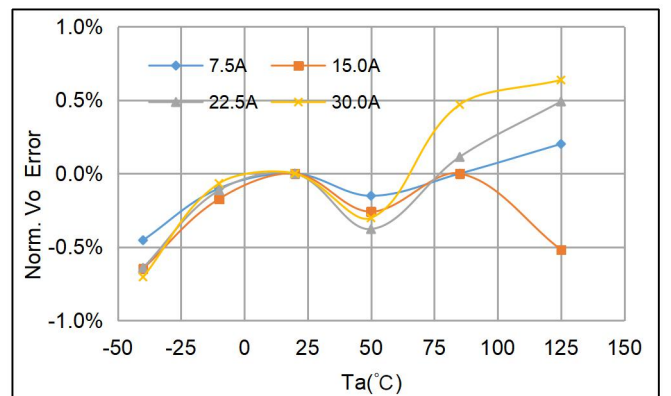


V_{out} error vs. T_a


40A Series

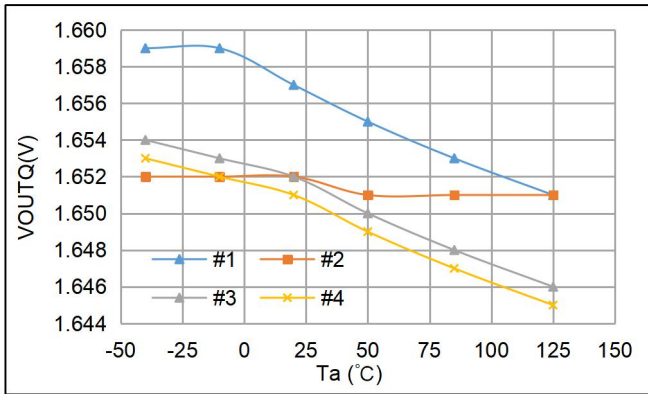


V_{OUTQ} vs. T_a

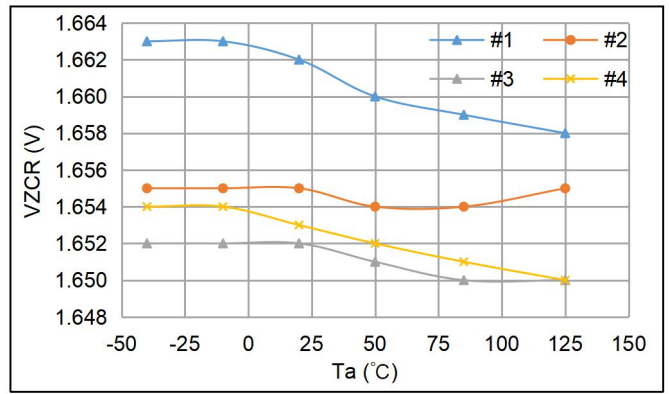


V_{ZCR} vs. T_a

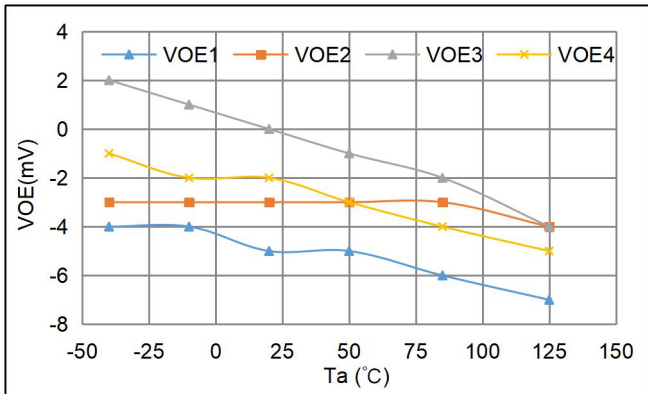


V_{OE} vs. T_a

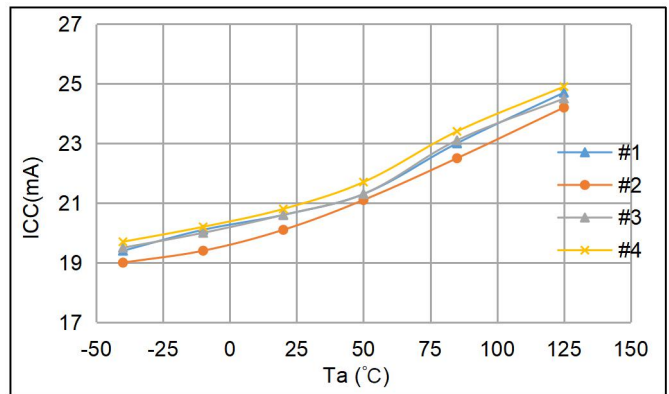

I_{CC} vs. T_a

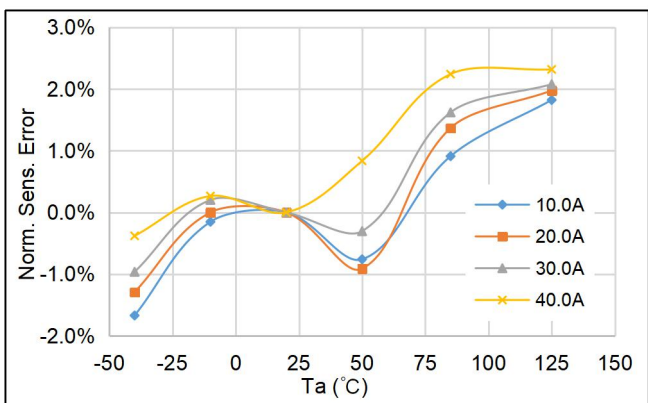


Sens error vs. T_a

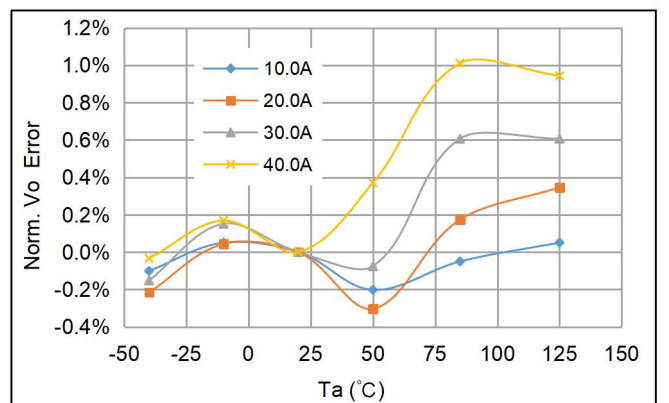

V_{OUT} error vs. T_a

PACKAGE INFORMATION

SOP8 PACKAGE

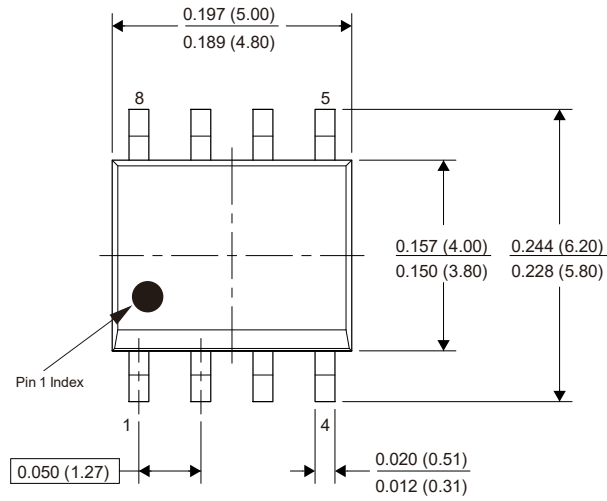

Note:

1. All dimensions are in millimeters.

Marking:

1st Line: CC6920BSO - Device Name



2nd Line: ELC - XX A - I_P Range XX A

3rd Line: XYYWW


XX – assembler code

YY – assembly year (last 2 digits)


WW – assembly week number

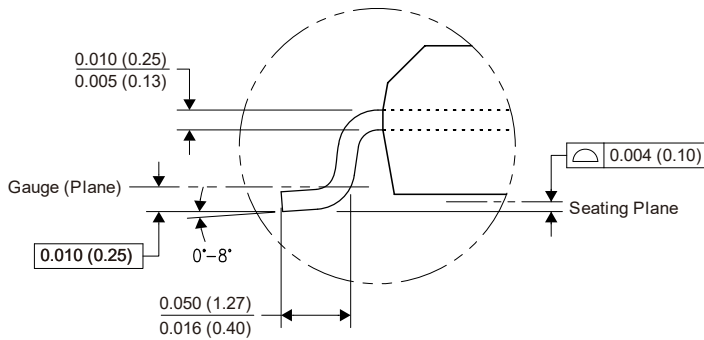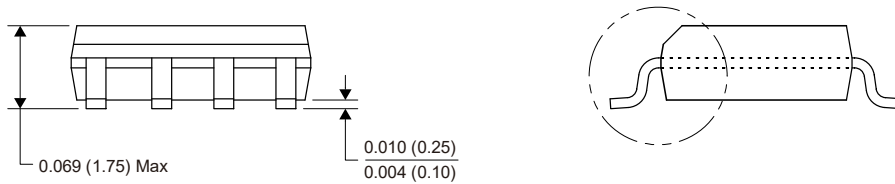

Package Reference

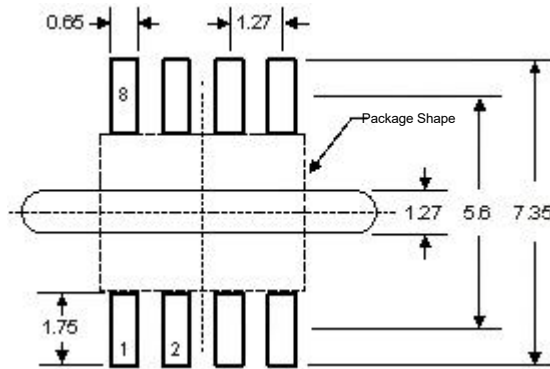


Reference 1: PCB slotting increases creepage distance


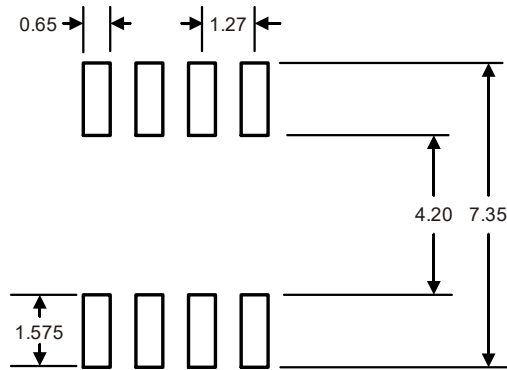


Reference 2: shorten pad length and increase creepage distance

Packaging & Taping

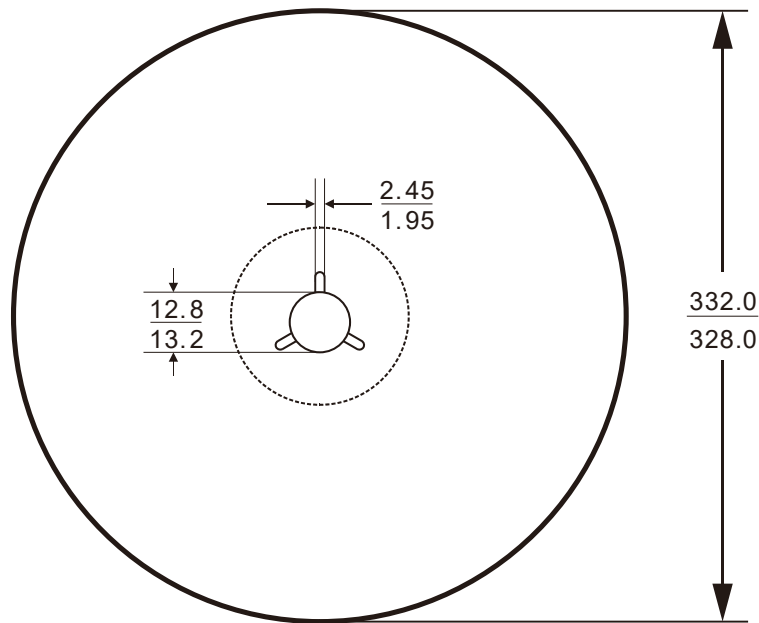

Information of Reel size

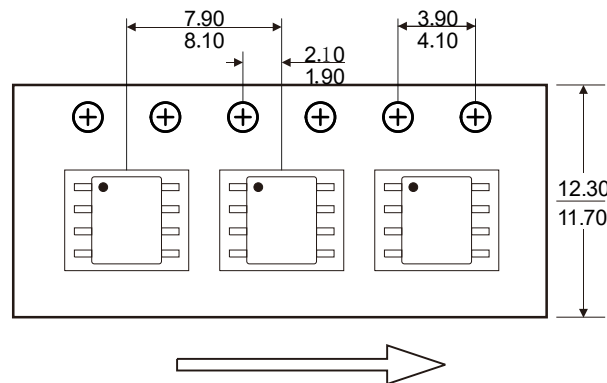

User Direction of Feed

Note: The space between the front and back of each tape is 50 ± 2 grids

CrossChip

CrossChip Microsystems Inc. was founded in 2013, is a national high-tech enterprise, engaged in integrated circuit design and sales. The company has strong technical strength, has more than 50 kinds of patents, mainly used in Hall sensor signal processing, with the following product lines:

- ✓ High precision linear Hall sensor
- ✓ All kinds of Hall switches
- ✓ Single phase motor drive
- ✓ Single chip current sensor
- ✓ AMR Magnetoresistance sensor

Contact us

Chengdu

Address: 4th floor, unit 2, building 3, No. 88, Tianchen Road, Gaoxinxi Zone, Chengdu, Sichuan Province

Tel: + 86 - 28 - 87787685

Email: support@crosschipmicro.com

Website: <http://www.crosschipmicro.com>

Shenzhen

Address: 605 room, 6F, Beike building, NO.18 Keyuan Rd, Yuehai Street, Nanshan District, Shenzhen

Shanghai

Address: Makeblock, 3 / F, magic square community, 4476 Huyi Road, Jiading District, Shanghai