
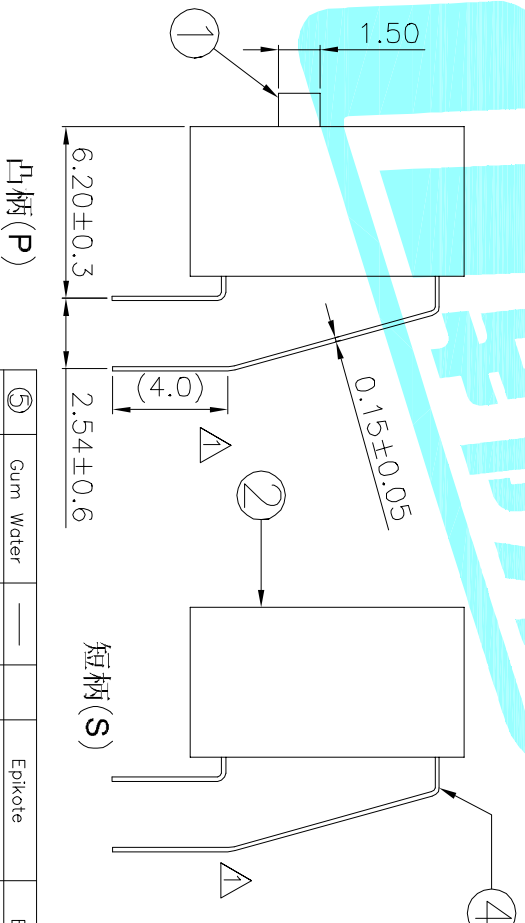
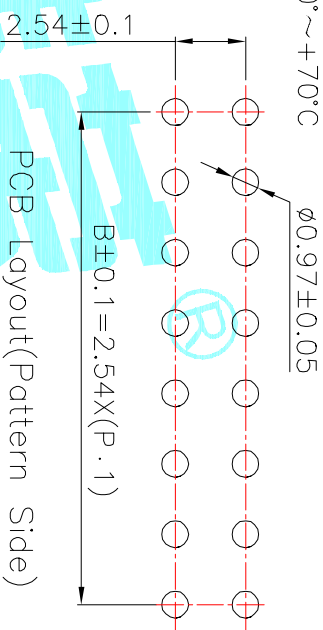
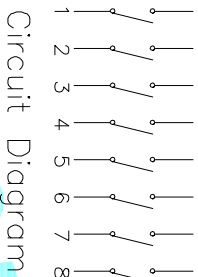
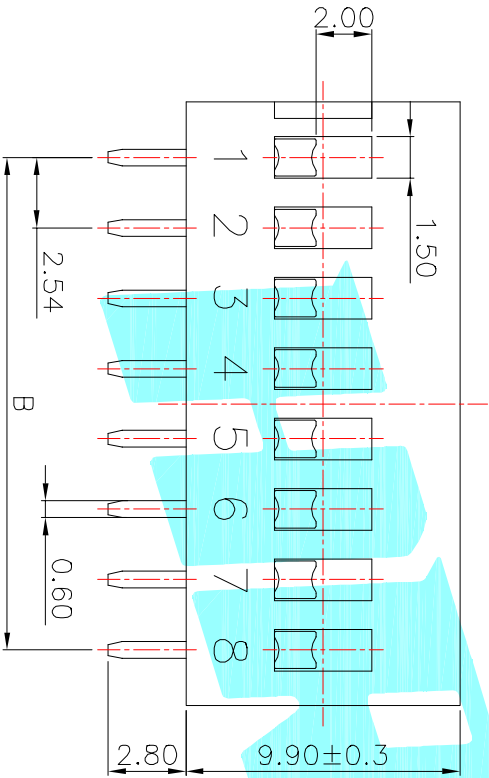


NOTE:

- 1.Rating: 24V 25mA DC
- 2.Insulation Resistance: $\geq 100 M\Omega$
- 3.Withstand voltage: AC 500V 1Minute
- 4.Operating Force Range: 400gf Max
- 5.Mechanical Life: 3,000 Cycles
- 6.Operating Temperature range $-20^{\circ}\sim +70^{\circ}C$
- 7.Ambient Humidity used: $\leq 85\%RH$

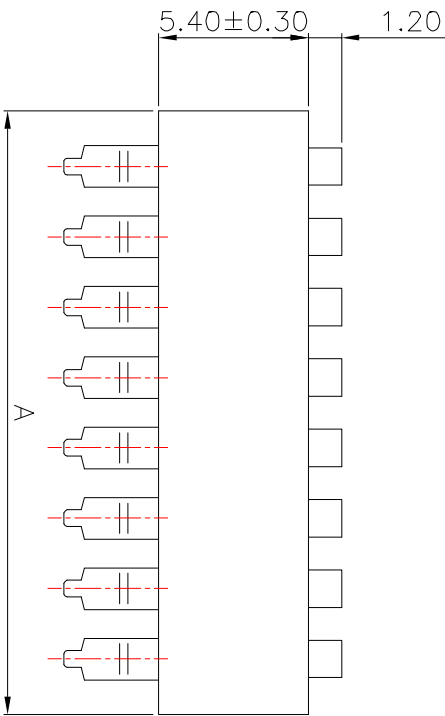

| Position(位数) | 2P | 3P | 4P | 5P | 6P | 7P | 8P | 9P | 10P | 12P |
|--------------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|
| DIM.A(长度) | 6.54 | 9.08 | 11.62 | 14.16 | 16.70 | 19.24 | 21.78 | 24.32 | 26.86 | 31.94 |
| DIM.B(高度) | 2.54 | 5.08 | 7.62 | 10.16 | 12.70 | 15.24 | 17.78 | 20.32 | 22.86 | 27.94 |

| PART NO. | 凸柄 (P) | 短柄 (S) | 短柄 (S) |
|------------|----------|----------|----------|
| 基于/红色 (R) | DA-02RP | DA-03RS | DA-04RP |
| 基于/蓝色 (B) | DA-02BP | DA-03BS | DA-04BP |
| 基于/白色 (W) | DA-02WP | DA-03WS | DA-04WP |
| 基于/黄色 (Y) | DA-02YP | DA-03YS | DA-04YP |
| 基于/绿色 (G) | DA-02GP | DA-03GS | DA-04GP |
| 基于/紫色 (V) | DA-02VP | DA-03VS | DA-04VP |
| 基于/棕色 (BR) | DA-02BRP | DA-03BRS | DA-04BRP |
| 基于/黑色 (BK) | DA-02BKP | DA-03BKS | DA-04BKP |
| 基于/灰色 (GR) | DA-02GRP | DA-03GRS | DA-04GRP |
| 基于/蓝色 (BL) | DA-02BLP | DA-03BLS | DA-04BLP |
| 基于/白色 (WH) | DA-02WBP | DA-03WBS | DA-04WBP |
| 基于/黄色 (YL) | DA-02YBP | DA-03YBS | DA-04YBP |
| 基于/绿色 (YL) | DA-02YBP | DA-03YBS | DA-04YBP |
| 基于/紫色 (YL) | DA-02YBP | DA-03YBS | DA-04YBP |
| 基于/棕色 (YL) | DA-02YBP | DA-03YBS | DA-04YBP |
| 基于/黑色 (YL) | DA-02YBP | DA-03YBS | DA-04YBP |
| 基于/灰色 (YL) | DA-02YBP | DA-03YBS | DA-04YBP |

| ITEM | PART NAME | TER'NO. | QTY. | MATERIAL | FINISHING | REMARK |
|------|-----------|---------|------|-----------------|------------|----------|
| ⑤ | Gum Water | --- | --- | Epicote | Black | --- |
| ④ | Terminal | --- | --- | Phosphor bronze | Au Plating | --- |
| ③ | Base | --- | 1 | PBT | Black | --- |
| ② | Cover | --- | 1 | PBT | Red/Blue | UL94 V-0 |
| ① | Keystroke | --- | 1 | PBT | White | --- |

| APPROVALS | DATE | TITLE |
|-----------------|-----------|--------------------------|
| DRAWN J.X.Zhong | 2013/11/8 | MULTIFUNCTIONAL SWITCHES |

ELECTRONICS CO.,LTD

| ECN NO. | REV. | DATE. | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---------|------|-------|--------------|---------|--------|--------|
| | B | | | | | |
| | A | | NEW | | | |

| TOLERANCES ARE | 30~100μm | 10~30μm | 5~10μm | ~5μm |
|----------------|----------|---------|--------|-------|
| ±0.30 | ±0.20 | ±0.15 | ±0.10 | ±0.05 |

| APPROVALS | PART NO. | SCALE: | PROJ: |
|-----------|----------|--------|--------|
| | DA-□□□□ | 1:1 | 1 OF 1 |