EVQ7200A-L-00B

42V, 1.2A, 410kHz, Synchronous LED Driver Buck-Boost Mode Evaluation Board, AEC-Q100 Qualified

DESCRIPTION

The EVQ7200A-L-00B is an evaluation board designed to demonstrate the capabilities of the MPQ7200A, a constant-current LED driver with integrated power MOSFETs. It offers a very compact solution to achieve 1.2A of continuous output current (I_{OUT}), with excellent load and line regulation across a wide input supply range.

Constant frequency hysteretic control mode provides extremely fast transient response without loop compensation. The switching frequency (f_{SW}) is 410kHz in buck-boost mode for optimized efficiency and thermal performance.

The MPQ7200A is available in a QFN-19 (3mmx4mm) package with wettable flanks, and is available in AEC-Q100 Grade 1.


The EVQ7200A-L-00B is a fully assembled and tested buck-boost mode LED driver evaluation board. It generates an LED current up to 1.2A from a 6V to 20V input range.

PERFORMANCE SUMMARY

Specifications are at T_A = 25°C, unless otherwise noted.

Parameters	Conditions	Value
Input voltage (V_{IN}) range		6V to 20V
Maximum output current (I_{OUT})	V_{IN} = 6V to 20V	1.2A
Typical efficiency	V_{IN} = 13.5V, 4 LEDs, I_{OUT} = 1.2A	89.95%
Peak efficiency	V_{IN} = 13.5V, 4 LEDs, I_{OUT} = 0.75A	91.06%
Switching frequency (f_{SW})		410kHz

EVALUATION BOARD

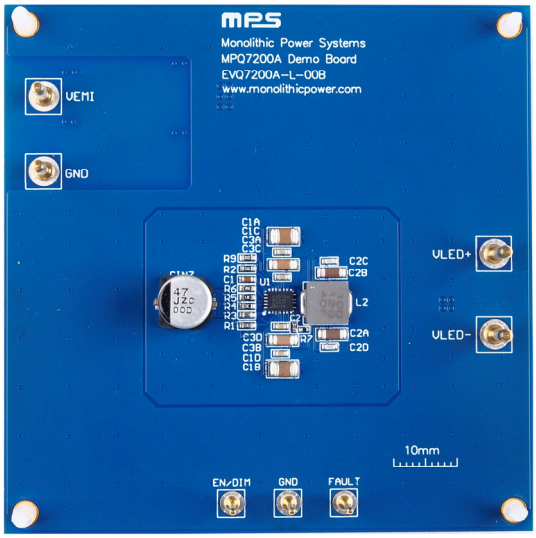

LxWxH (8.3cmx8.3cmx1.3cm)

Board Number	MPS IC Number
EVQ7200A-L-00B	MPQ7200AGLE-AEC1

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

QUICK START GUIDE

1. Preset the power supply between 6V and 20V, then turn off the power supply (see Figure 1). Note that the input voltage (V_{EMI}) plus output voltage (V_{OUT}) should be below 40V.

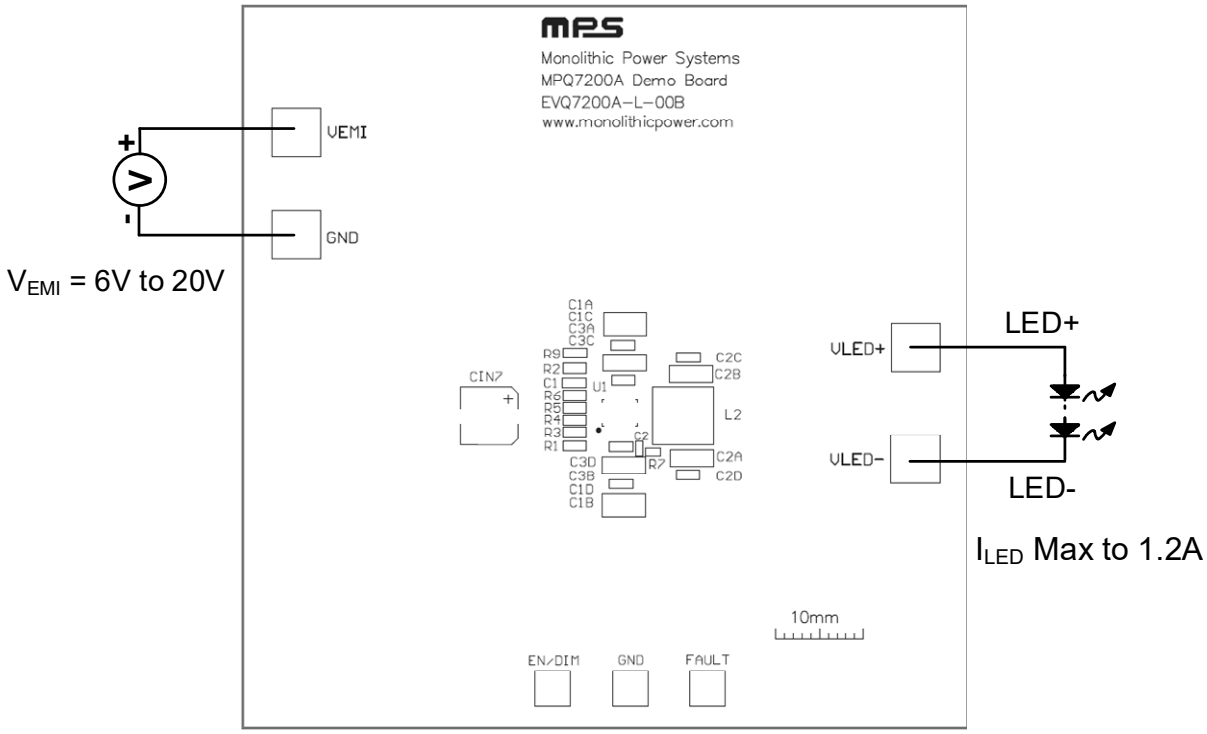


Figure 1: Measurement Equipment Set-Up

2. If longer cables (>0.5m total) are being used between the source and the evaluation board, install a damping capacitor at the input terminals. This is especially critical when V_{EMI} exceeds 24V.
3. Connect the power supply terminals to:
   a. Positive (+): VEMI
   b. Negative (-): GND
4. Connect the load terminals to:
   a. Positive (+): VLED+
   b. Negative (-): VLED-
5. After making the connections, turn on the power supply.
6. To use the enable (EN) function, apply a digital input to the EN/DIM pin. Drive EN above 2.5V to turn the regulator on; drive EN below 1V to turn it off.
7. When two-step dimming is inactive (R_{DUTY} = 4.87kΩ), an external 100Hz to 2kHz pulse-width modulation (PWM) waveform can be applied to the EN/DIM pin.
8. To initiate two-step dimming, use the EN/DIM pin. Table 1 on page 3 shows the proposed resistor (R3) in E96 series for different dimming duty cycles. When EN/DIM is high, the dimming duty cycle is 100%; when EN/DIM is low, the dimming duty cycle percentage varies.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

QUICK START GUIDE *(continued)*

Table 1: Two-Step Dimming Duty vs. R3

Two-Step Dimming Duty	R3 (Ω)
15%	61900
14%	41200
13%	27400
12%	18200
11%	12100
10%	7870
Two-step dimming off	4870
9%	3090
8%	2050
7%	1370
6%	887
5%	576

9. The external resistor (R5) connected to the ISET pin sets the LED current (I_{LED}). R5 can be calculated using Equation (1):

$$R5 = \frac{16}{I_{LED}(A)}(k\Omega) \quad (1)$$

To get better I_{LED} precision, Table 2 shows the recommended LED setting resistor values in buck-boost mode when I_{LED} is below 0.7A (see Figure 2).

Table 2: Resistor Selection when I_{LED} ≤ 700mA in Buck-Boost Mode

I_{LED} (A)	R5 (kΩ)
0.7	22.6
0.65	24.4
0.6	26.3
0.55	28.6
0.5	31.5
0.45	34.9
0.4	39.1


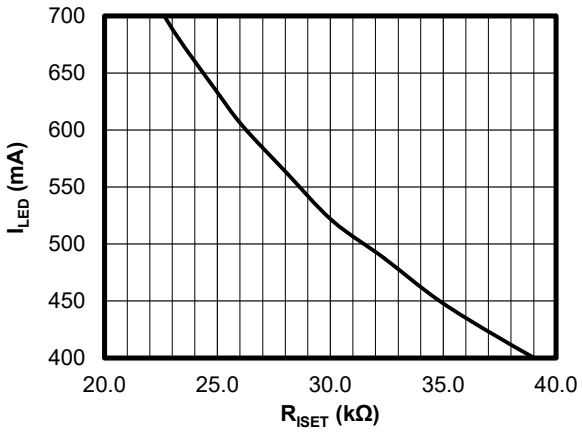


Figure 2: I_{LED} vs. R_{ISET} when I_{LED} ≤ 700mA in Buck-Boost Mode

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVALUATION BOARD SCHEMATIC

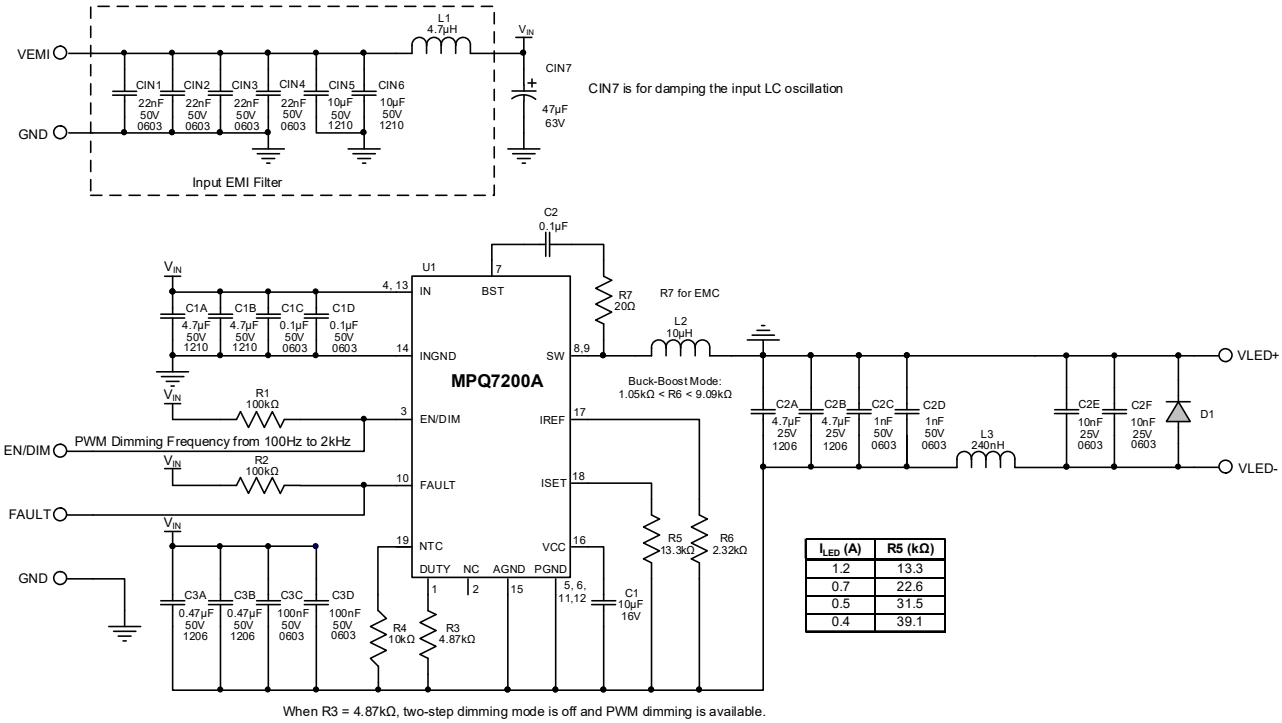

I_{LED} (A)	R5 (kΩ)
1.2	13.3
0.7	22.6
0.5	31.5
0.4	39.1

Figure 3: Evaluation Board Schematic

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVQ7200A-L-00B BILL OF MATERIALS

Qty	Ref	Value	Description	Package	Manufacturer	Manufacturer PN
1	L1	4.7µH	Inductor, 44.1mΩ DCR, 4.6A	SMD	Coilcraft	XAL4030-472MEB
1	L2	10µH	Inductor, 61mΩ DCR, 4A	SMD	Cyntec	VCMT063T-100MN5
1	L3	240nH	Inductor, 27mΩ DCR, 3.8A	SMD	Cyntec	VCUW20161B-R24MS5-89
4	CIN1, CIN2, CIN3, CIN4	22nF	Ceramic capacitor, 50V, X7R	0603	TDK	C1608X7R1H223K
2	CIN5, CIN6	10µF	Ceramic capacitor, 50V, X7R	1210	Murata	GRM32ER71H106KA8
1	CIN7	47µF	Electrolytic capacitor, 63V	SMD	Panasonic	EEHZC1J470P
2	C1A, C1B	4.7µF	Ceramic capacitor, 50V, X7R	1210	Murata	GRM32ER71H475KA8
4	C1C, C1D, C3C, C3D	0.1µF	Ceramic capacitor, 50V, X7R	0603	Murata	GRM188R71H104KA93D
2	C2A, C2B	4.7µF	Ceramic capacitor, 25V, X7R	1206	TDK	C3216X7R1E475M
2	C3A, C3B	0.47µF	Ceramic capacitor, 50V, X7R	1206	TDK	C3216X7R1H474K
2	C2C, C2D	1nF	Ceramic capacitor, 50V, C0G	0603	Murata	GRM1885C1H02JAC
2	C2E, C2F	10nF	Ceramic capacitor, 25V, X7R	0603	Wurth	885012206065
1	C1	10µF	Ceramic capacitor, 10V, X7R	0603	Murata	GRM188Z71A106KA73D
1	C2	0.1µF	Ceramic capacitor, 16V, X7R	0603	Murata	GRM188R71C104KA01D
2	R1, R2	100kΩ	Film resistor, 5%	0603	Yageo	RC0603JR-07100KL
1	R9	10Ω	Film resistor, 1%	0604	Yageo	RC0603FR-0710RL
1	R4	10kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0710KL
1	R7	20Ω	Film resistor, 1%	0402	Yageo	RC0402FR-0720RL
1	R5	13.3kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-0713K3L
1	R6	2.32kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-072K32L
1	R3	4.87kΩ	Film resistor, 1%	0603	Yageo	RC0603FR-074K87L
1	D1	40V	Schottky diode, 1A	SMA	Diodes, Inc.	B140
4	VEMI, GND, VLED+, VLED-	2mm	Golden pin	DIP	Custom	
4	EN, GND, DIM, FAULT	1mm	Golden pin	DIP	Custom	
1	U1	MPQ7200A	Buck-boost regulator, AEC-Q100	QFN-19 (3mmx4mm)	MPS	MPQ7200AGLE-AEC1


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


CISPR25 Class 5 Peak Conducted Emissions

150kHz to 108MHz

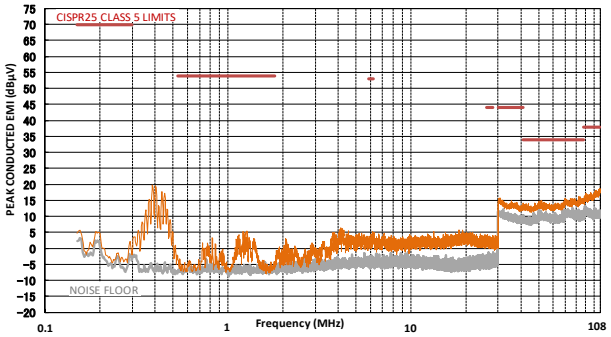


CISPR25 Class 5 Average Conducted Emissions

150kHz to 108MHz

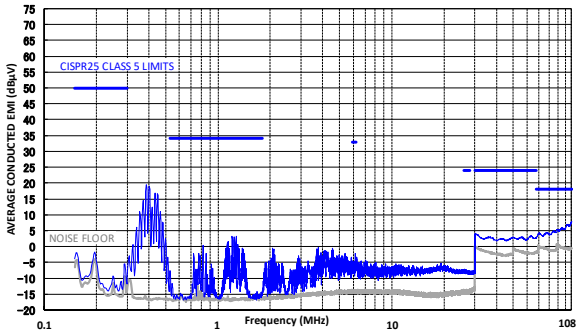


CISPR25 Class 5 Peak Radiated Emissions

150kHz to 30MHz

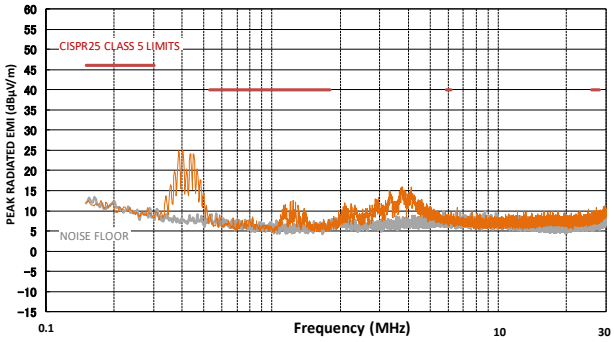


CISPR25 Class 5 Average Radiated Emissions

150kHz to 30MHz

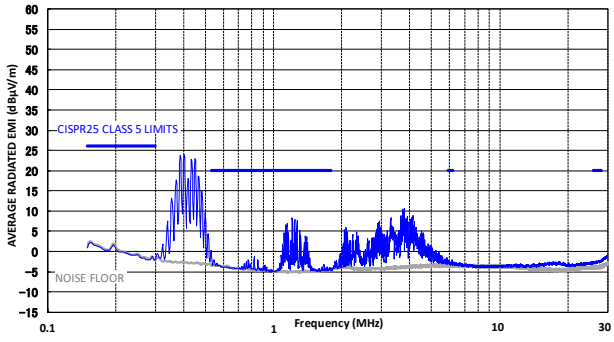


CISPR25 Class 5 Peak Radiated Emissions

Horizontal, 30MHz to 200MHz

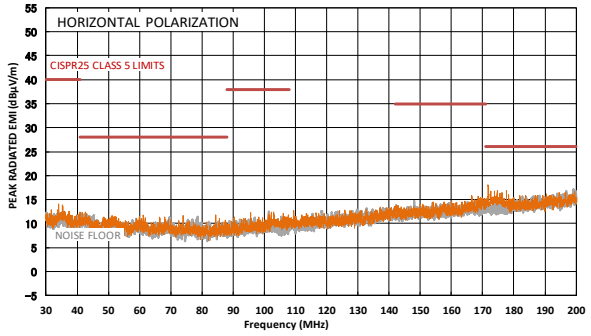

CISPR25 Class 5 Average Radiated Emissions

Horizontal, 30MHz to 200MHz

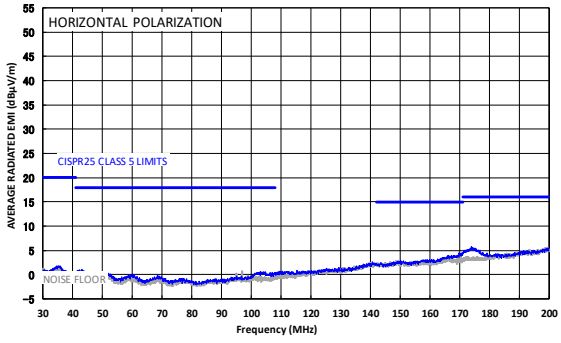


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


CISPR25 Class 5 Peak Radiated Emissions

Vertical, 30MHz to 200MHz

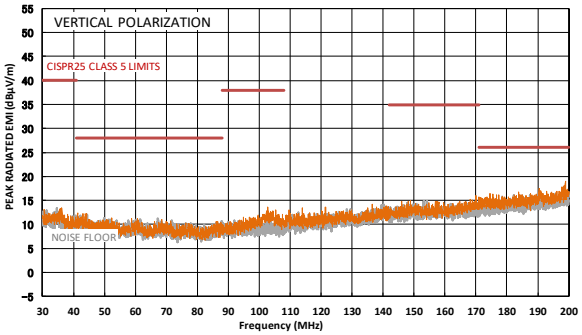


CISPR25 Class 5 Average Radiated Emissions

Vertical, 30MHz to 200MHz

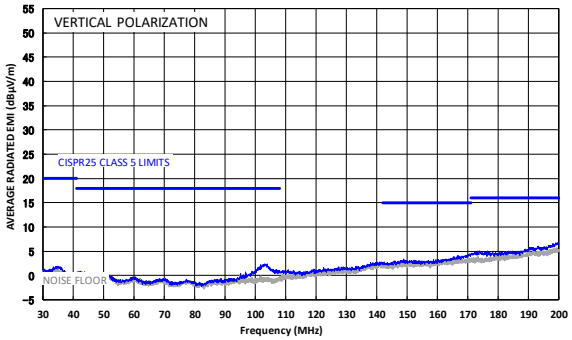


CISPR25 Class 5 Peak Radiated Emissions

Horizontal, 200MHz to 1GHz

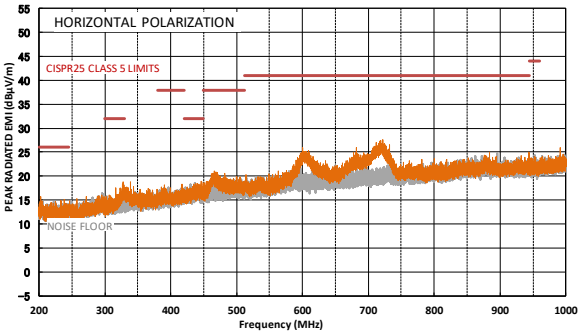


CISPR25 Class 5 Average Radiated Emissions

Horizontal, 200MHz to 1GHz

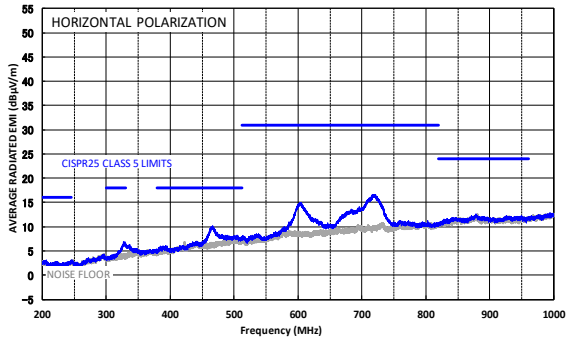


CISPR25 Class 5 Peak Radiated Emissions

Vertical, 200MHz to 1GHz

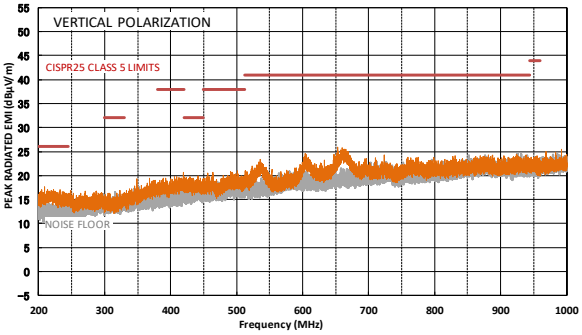

CISPR25 Class 5 Average Radiated Emissions

Vertical, 200MHz to 1GHz

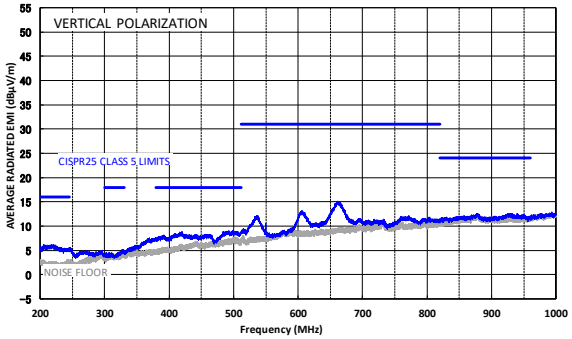


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted. (1)


Efficiency vs. Input Voltage vs. Power Loss

3 LEDs (V_{LED} = 9V), I_{LED} = 1.2A/1A, L = 10µH, I_{LED} = 0.75A, L = 15µH

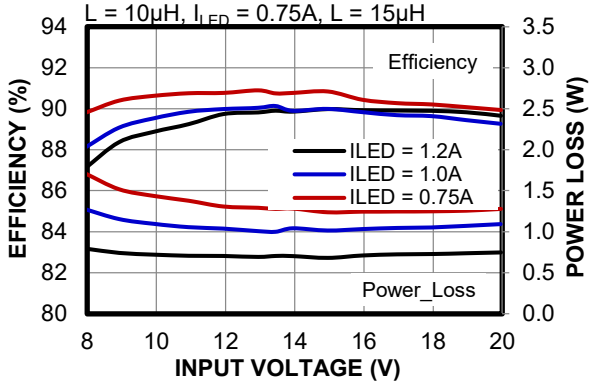


Efficiency vs. Input Voltage vs. Power Loss

4 LEDs (V_{LED} = 12V), I_{LED} = 1.2A/1A, L = 10µH, I_{LED} = 0.75A, L = 15µH

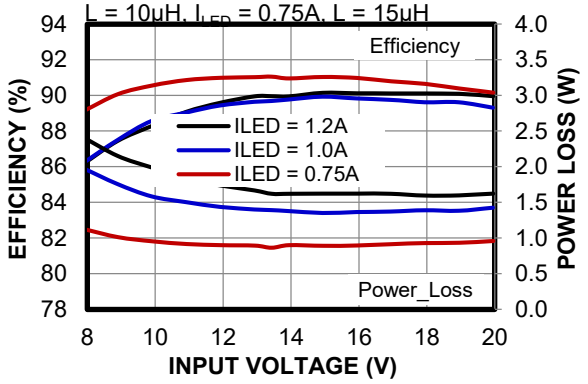


Efficiency vs. Input Voltage vs. Power Loss

3 LEDs (V_{LED} = 9V), I_{LED} = 0.6A, L = 15µH, I_{LED} = 0.4A/0.5A, L = 22µH

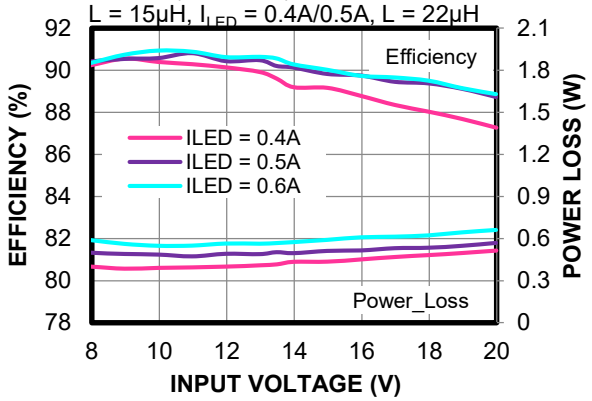


Efficiency vs. Input Voltage vs. Power Loss

4 LEDs (V_{LED} = 12V), I_{LED} = 0.6A, L = 15µH, I_{LED} = 0.4A/0.5A, L = 22µH

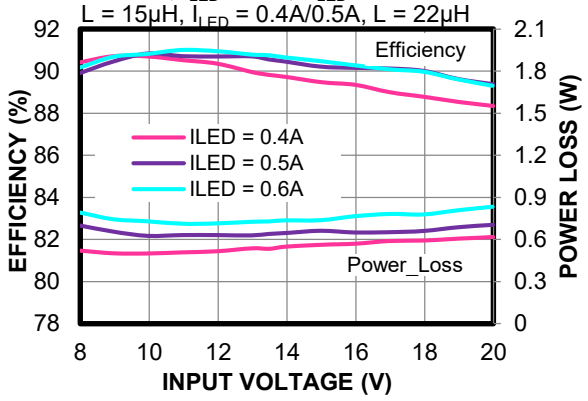


Case Temperature Rise vs. Input Voltage

3 LEDs (V_{LED} = 9V), L = 10µH

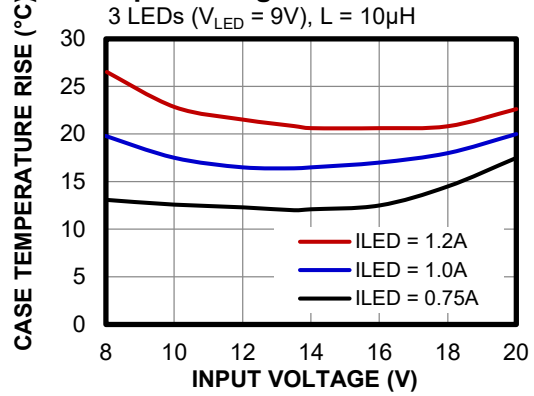

Case Temperature Rise vs. Input Voltage

4 LEDs (V_{LED} = 12V), L = 10µH

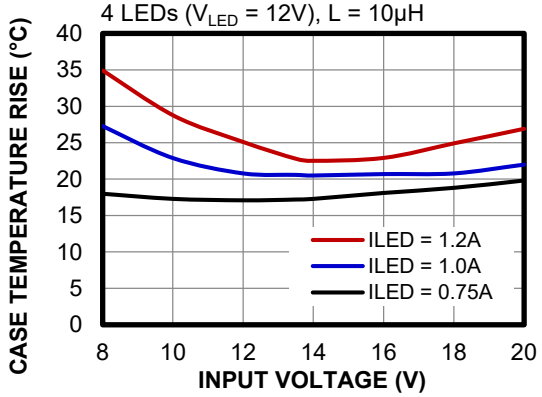

Note:

1) The inductor details about the efficiency curves follow: L = 15µH (XAL5050-153MEB), L = 22µH (XAL5050-223MEB).


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


Steady State

I_{LED} = 1.2A

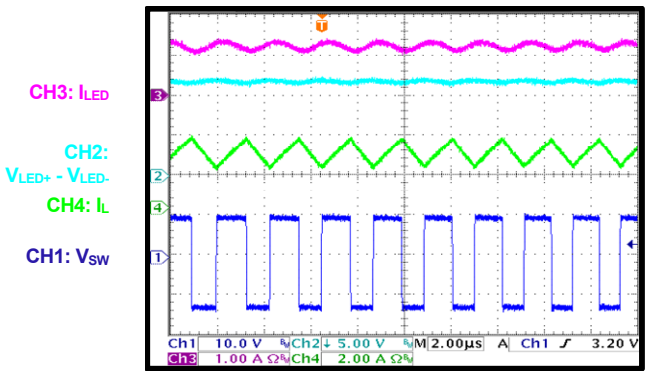


Start-Up through VIN

I_{LED} = 1.2A

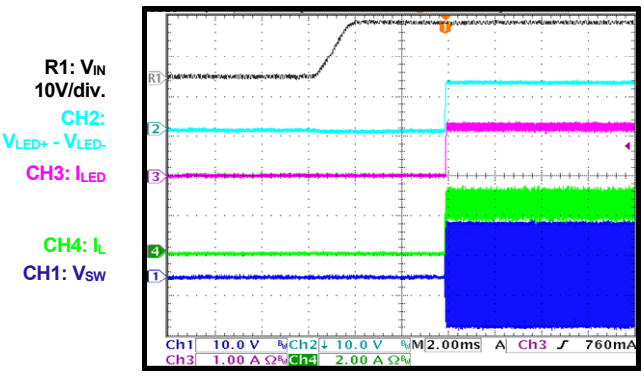


Shutdown through VIN

I_{LED} = 1.2A

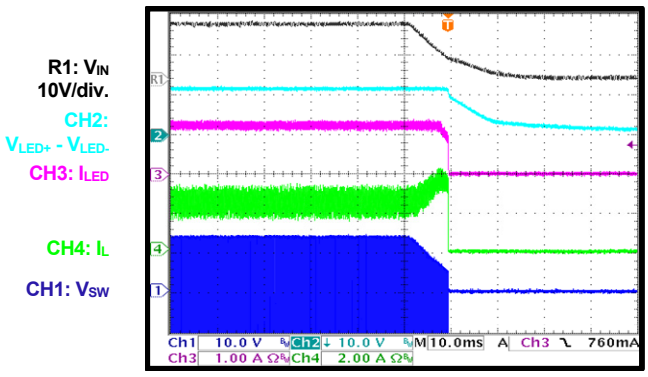


Start-Up through EN

I_{LED} = 1.2A

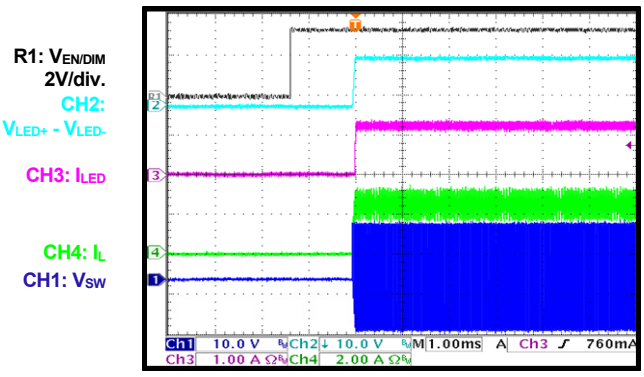


Shutdown through EN

I_{LED} = 1.2A

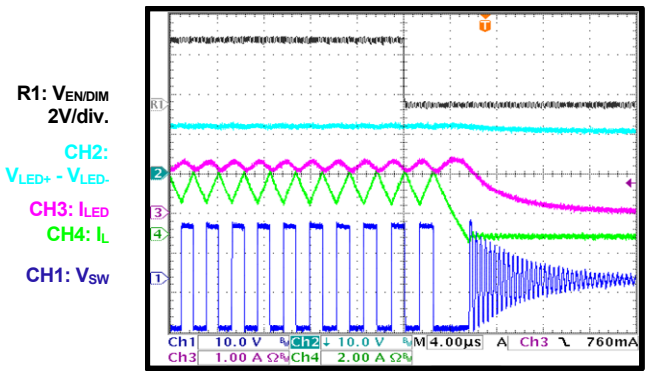

PWM Dimming Steady State

Dimming frequency = 100Hz

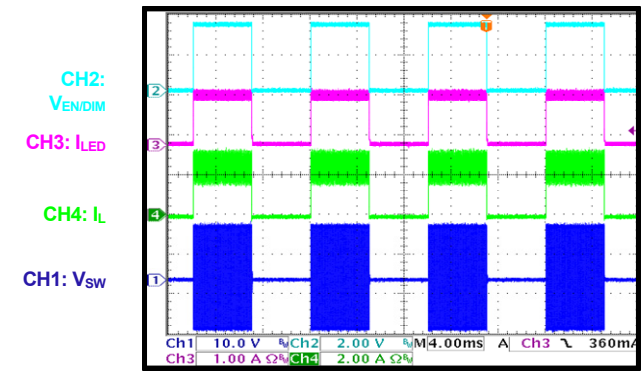


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


PWM Dimming Steady State

Dimming frequency = 2kHz

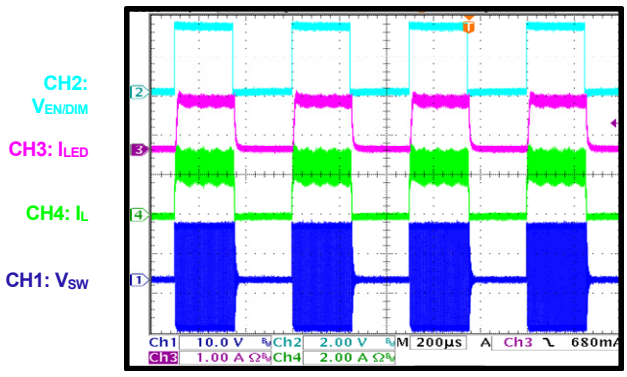


PWM Dimming

Start-up through VIN

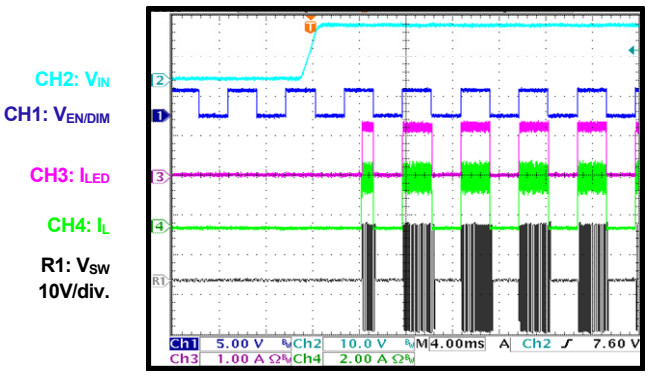


PWM Dimming

Shutdown through VIN

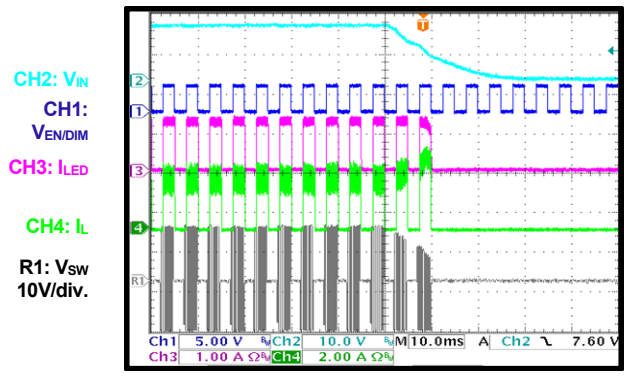


Two-Step Dimming

Steady state

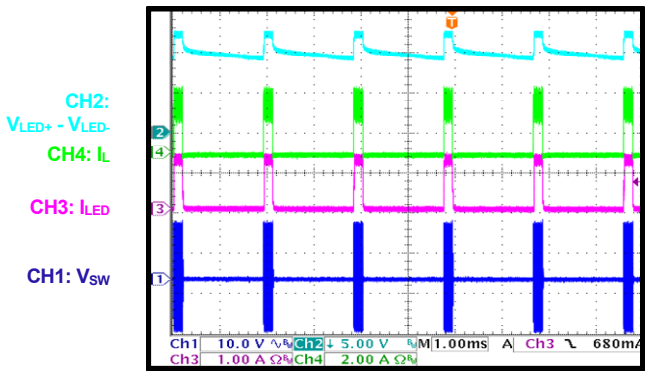


Two-Step Dimming

Start-up through VIN

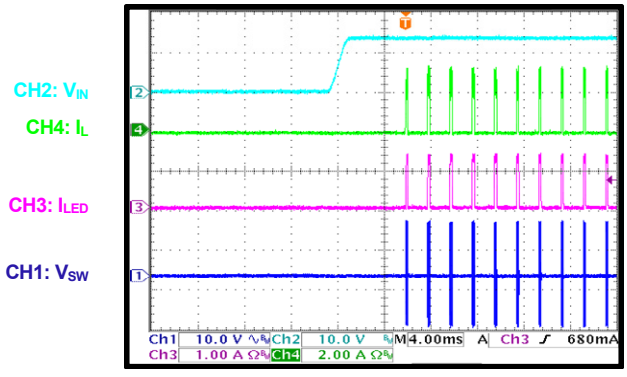

Two-Step Dimming

Shutdown through VIN

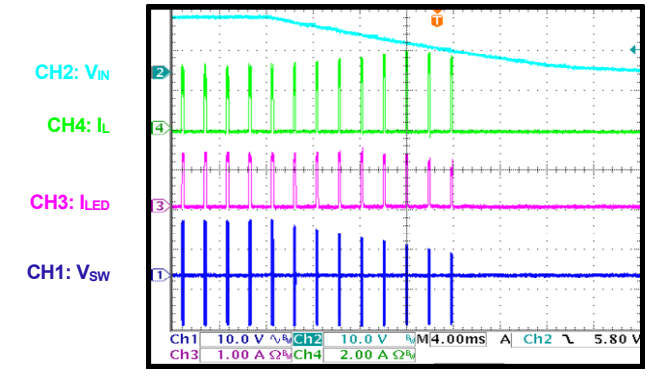


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


No Dimming
LED open during VIN start-up

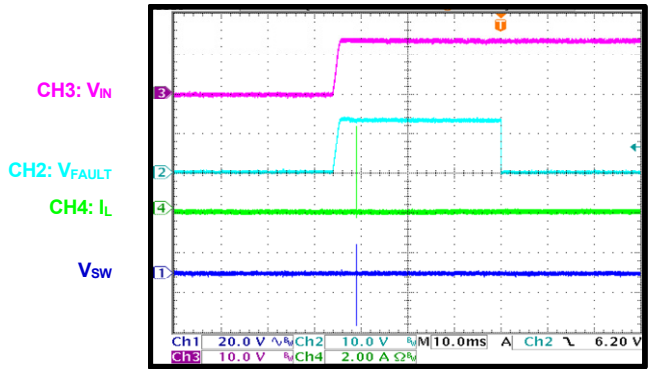


No Dimming
LED open entry

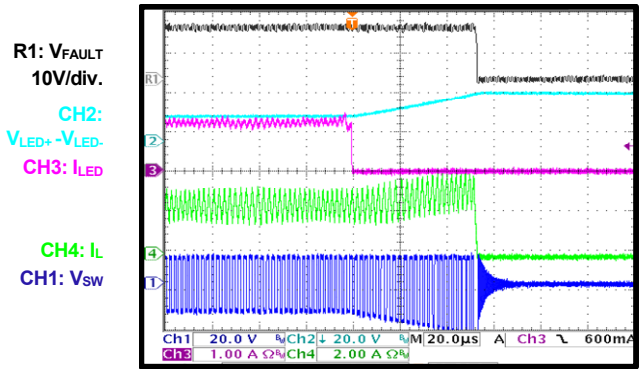


PWM Dimming
LED open during VIN start-up

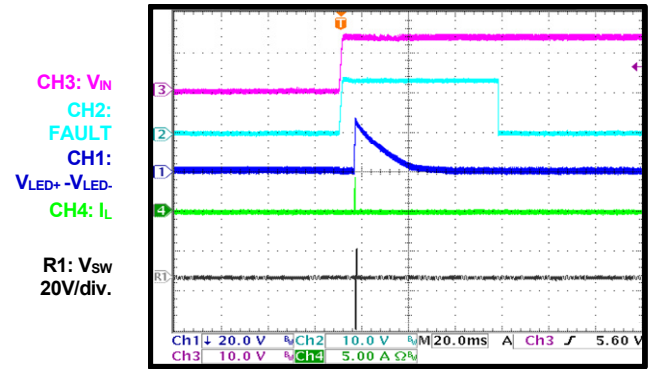


PWM Dimming
LED open entry

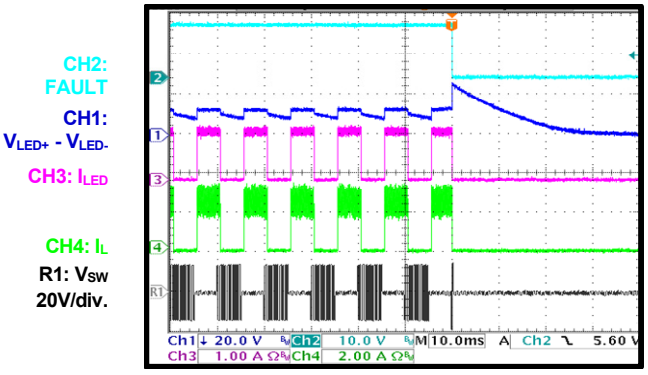

Two-Step Dimming
LED open during VIN start-up

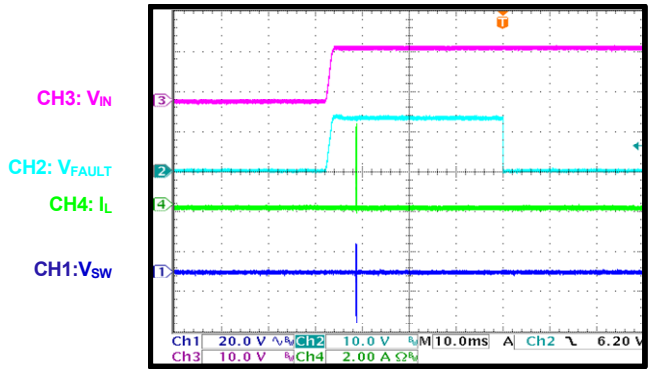

Two-Step Dimming
LED open entry

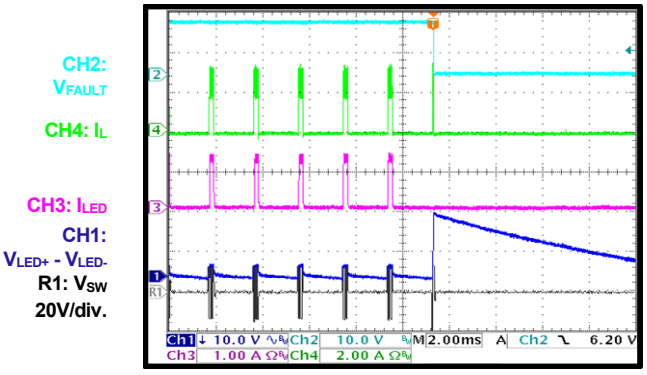


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


No Dimming
LED+ short to LED- during VIN start-up

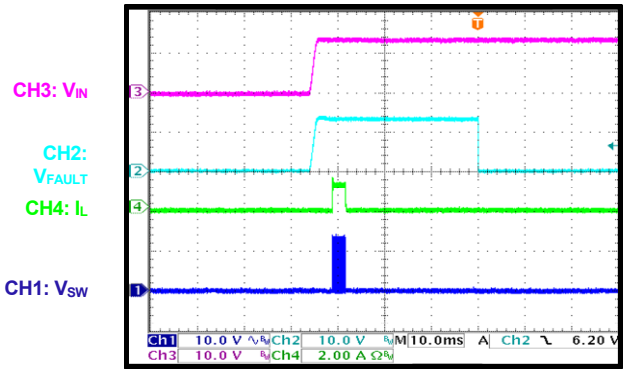


No Dimming
LED+ short to LED- entry

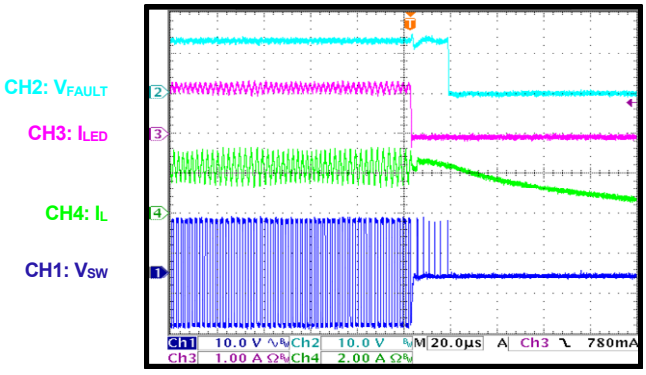


PWM Dimming
LED+ short to LED- during VIN start-up

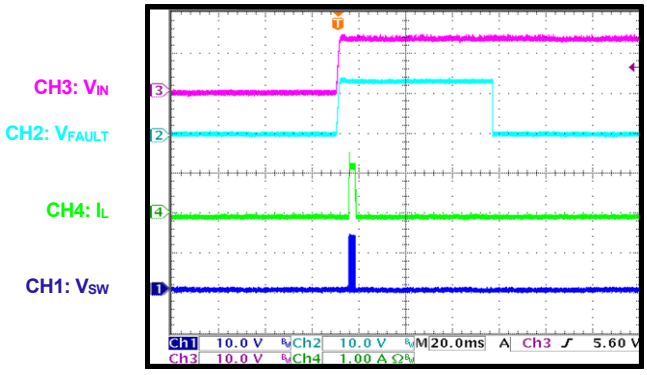


PWM Dimming
LED+ short to LED- entry

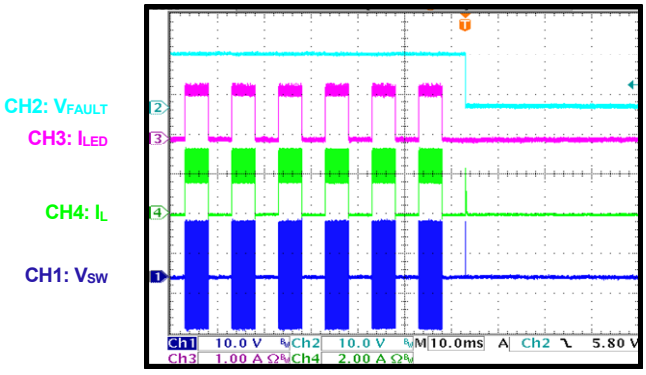

Two-Step Dimming
LED+ short to LED- during VIN start-up

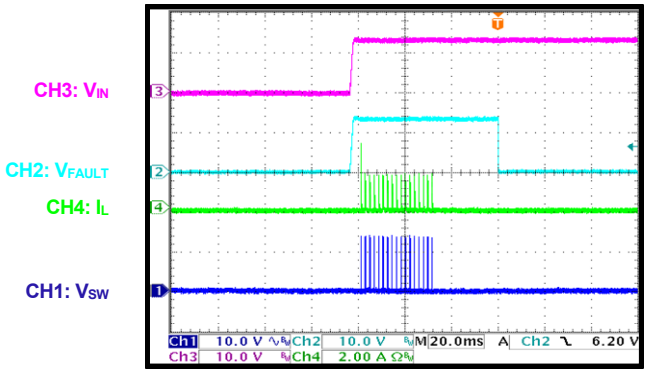

Two-Step Dimming
LED+ short to LED- entry

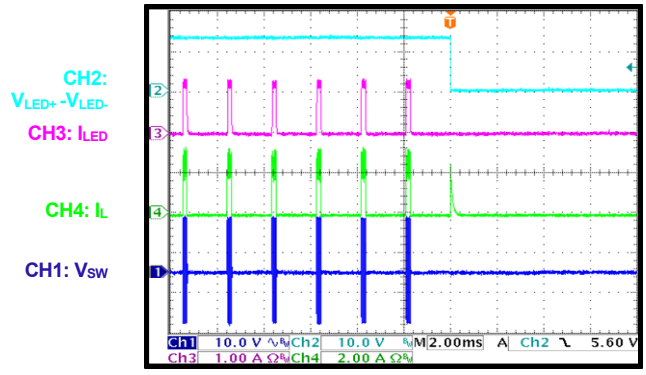


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


I_{REF} Short before VIN Start-Up

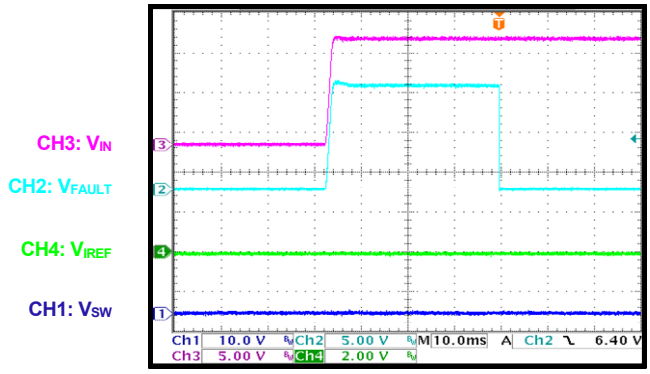


I_{REF} Open before VIN Start-Up

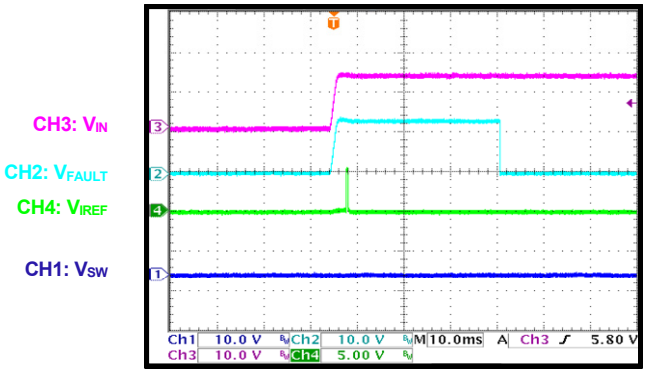

I_{REF} Short after VIN Start-Up

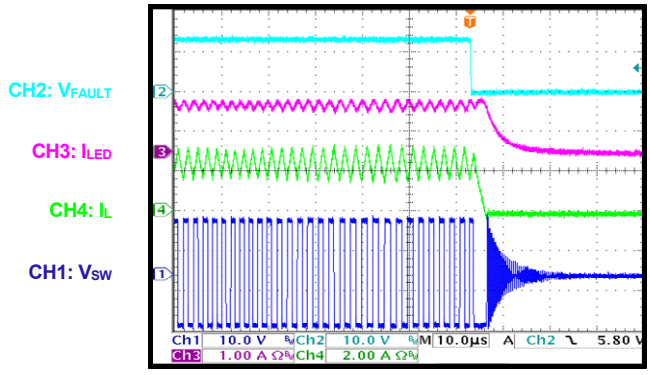


I_{REF} Open after VIN Start-Up

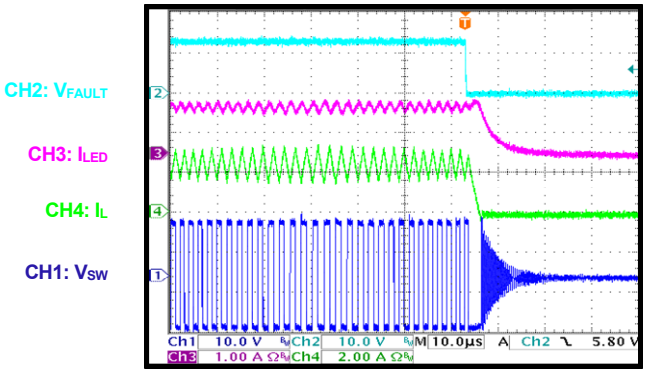


I_{REF} Short after VIN Start-Up

PWM dimming

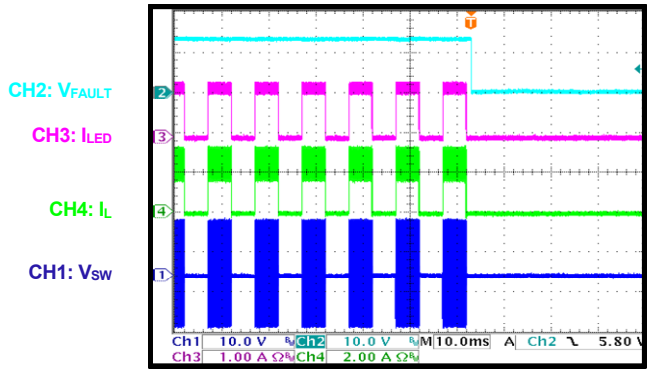

I_{REF} Open after VIN Start-Up

PWM dimming

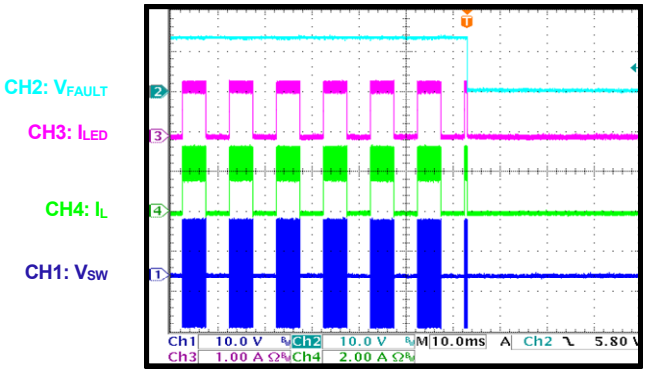


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


I_{SET} Short before VIN Start-Up

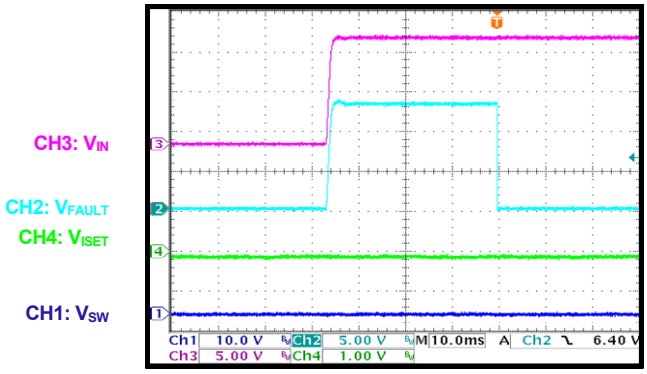


I_{SET} Open before VIN Start-Up

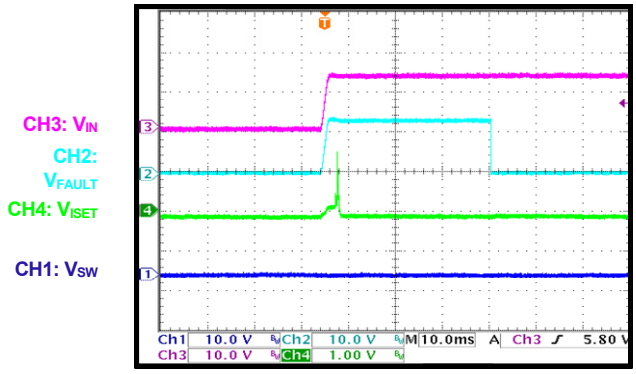

I_{SET} Short after VIN Start-Up

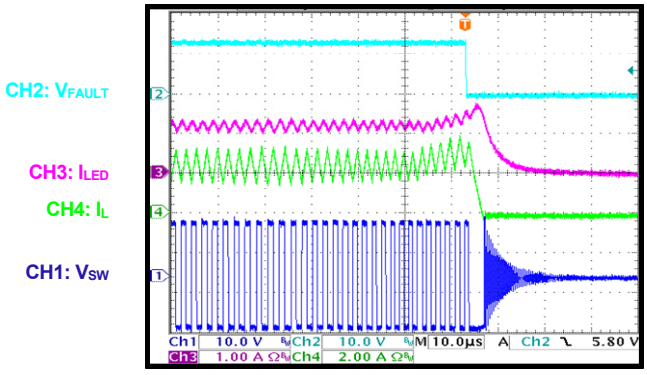


I_{SET} Open after VIN Start-Up

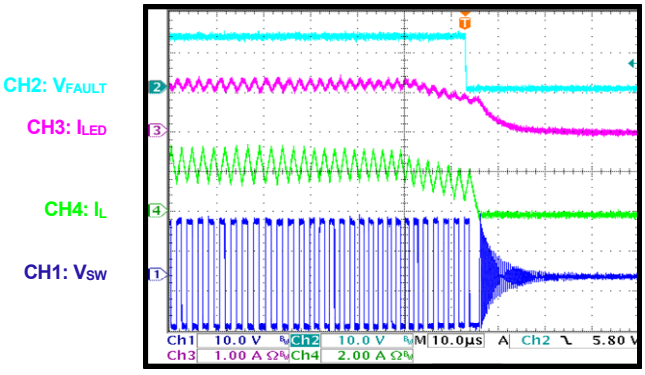


I_{SET} Short after VIN Start-Up

PWM dimming

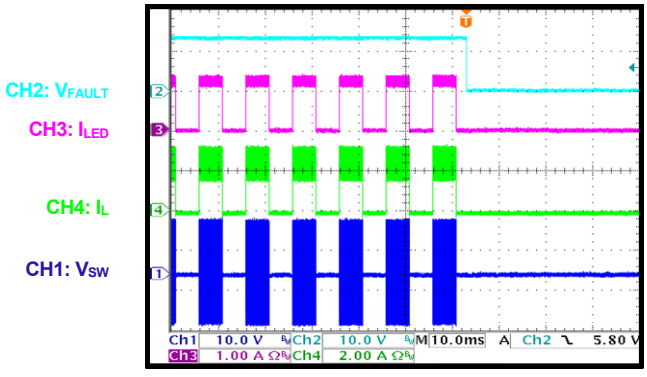

I_{SET} Open after VIN Start-Up

PWM dimming

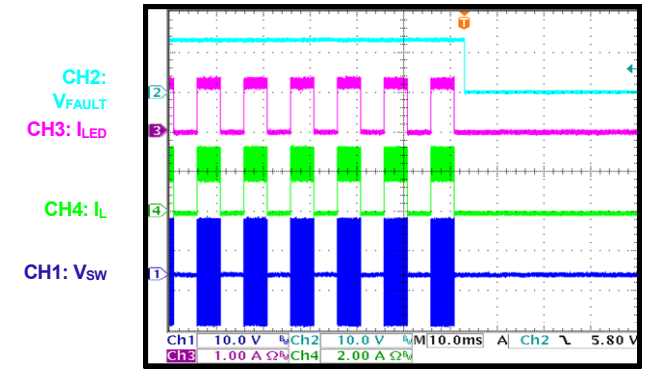


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

Performance curves and waveforms are tested on the evaluation board, V_{IN} = 13.5V, 4 LEDs in series (V_{LED} = 12V), f_{SW} = 410kHz, L = 10µH, T_A = 25°C, unless otherwise noted.


I_{DUTY} Short before VIN Start-Up

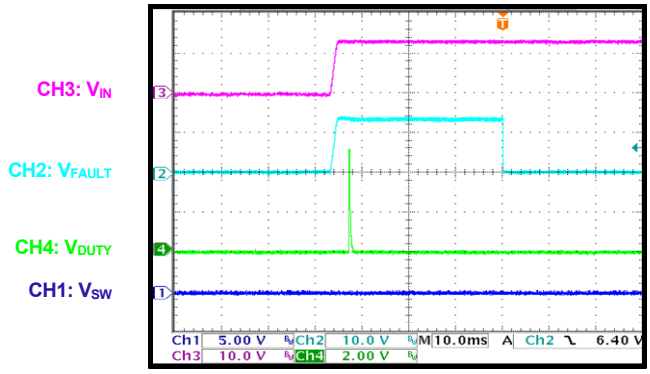


I_{DUTY} Open before VIN Start-Up

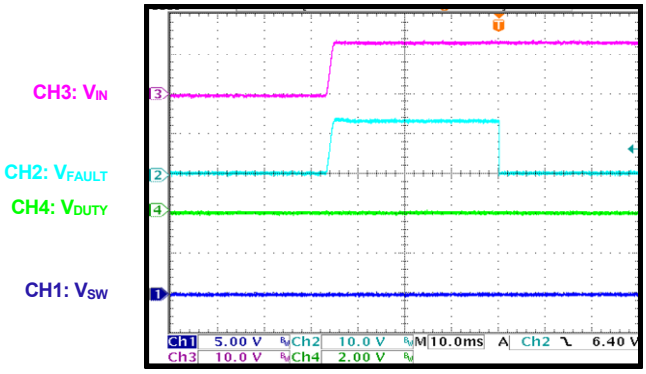


FAULT Short during VIN Start-Up

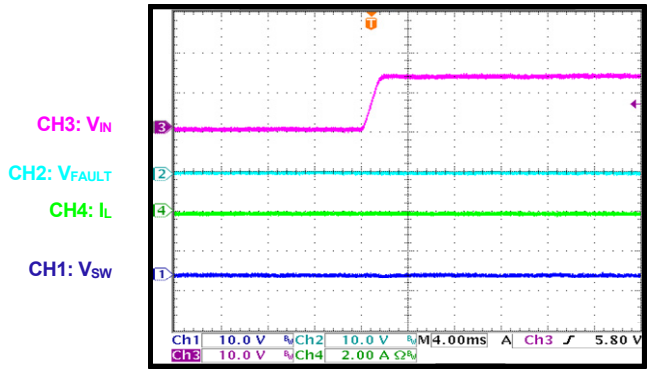

FAULT Short after VIN Start-Up

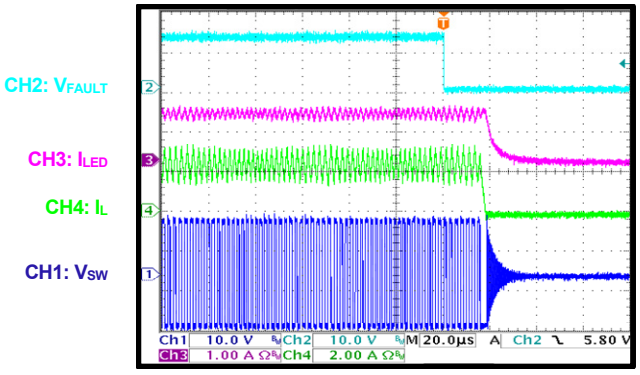

False Mode Detection during VIN Start-Up

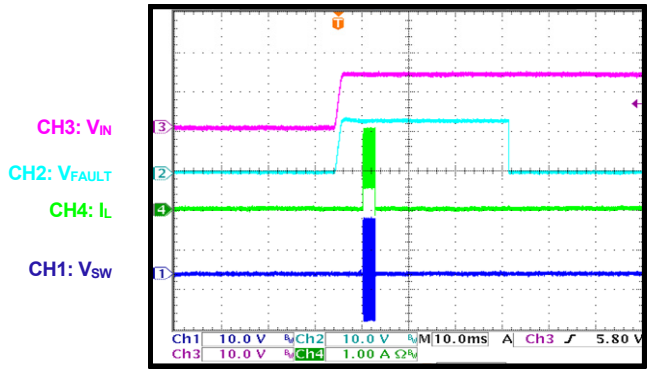

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

PCB LAYOUT

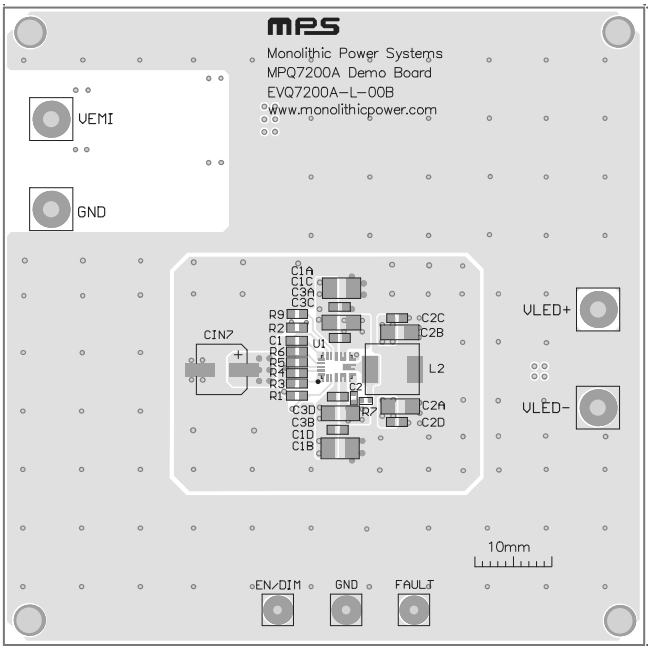


Figure 4: Top Silk and Top Layer

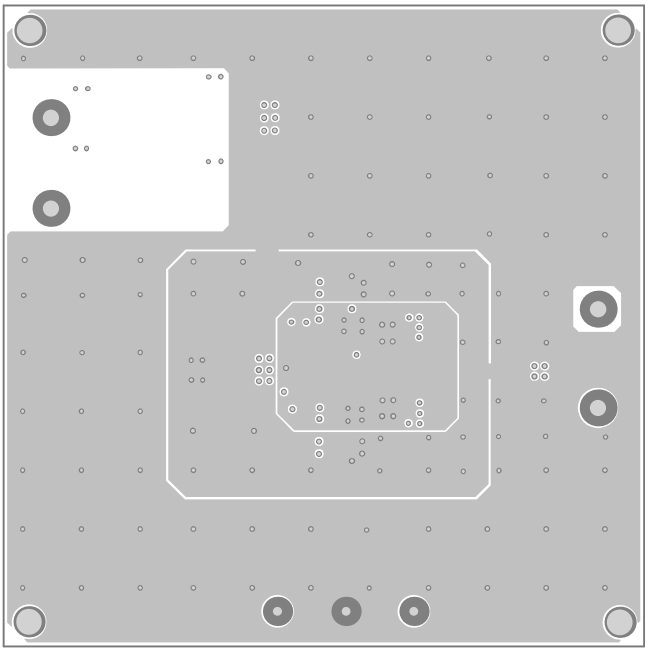


Figure 5: Mid-Layer 1

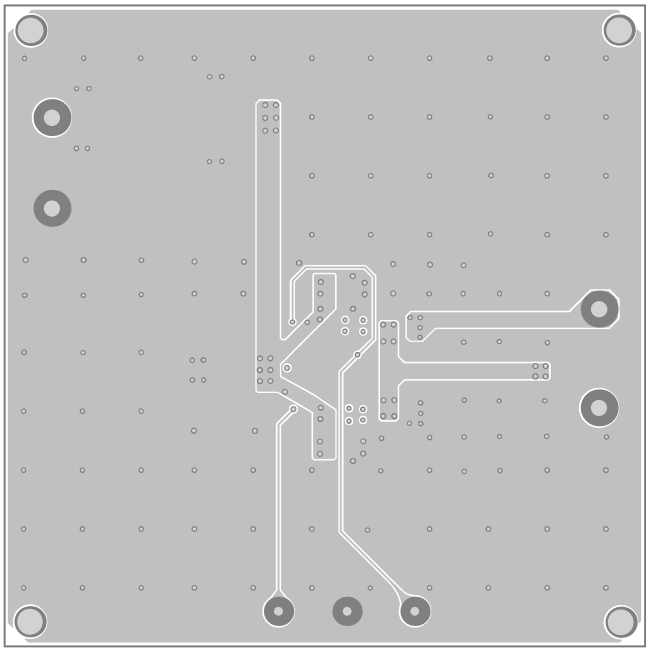


Figure 6: Mid-Layer 2

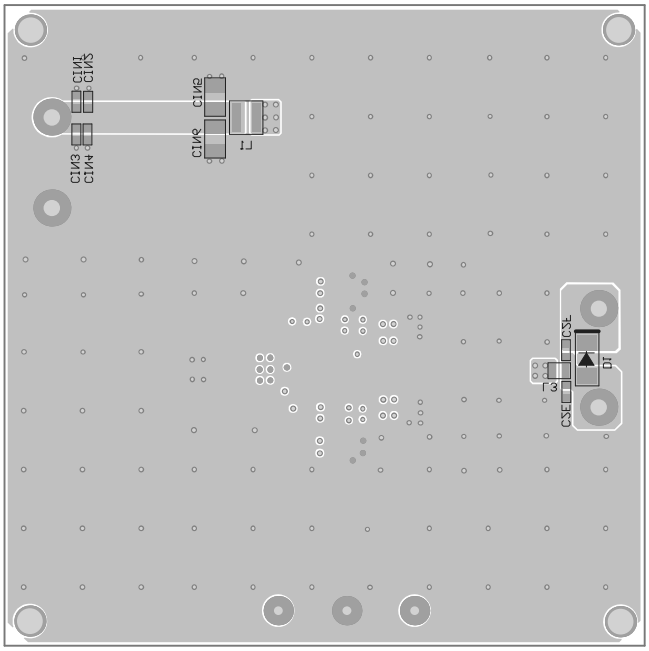


Figure 7: Bottom Layer and Bottom Silk

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.

REVISION HISTORY

Revision #	Revision Date	Description	Pages Updated
1.0	1/26/2022	Initial Release	-

Notice: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2022 MPS. All Rights Reserved.