



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-057-001 REV.: 3

2.4*7.1mm Rectangular Type LED Lamps

PART NO. : 573GD

ECN: _____

Page: 1/4

■ Features :

- Choice of various viewing angles
- Available on tape and reel.
- Reliable and robust


■ Descriptions :

- The series is specially designed for applications requiring higher brightness
- The led lamps are available with different colors, intensities,

■ Applications :

- TV set
- Monitor
- Telephone
- Computer

■ Package Dimensions:

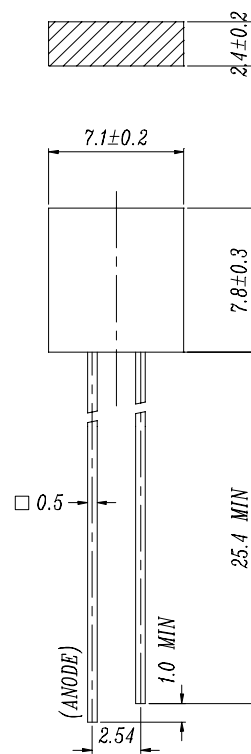

■ Notes :

1. All dimensions are in millimeters.
2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
3. Tolerances unless Dimension ±0.25mm.

PART NO.	Chip		Lens Color
	Material	Emitted Color	
573GD	GaP	Green	Green Diffused

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan
 Bonded Processing Zone Pan Yu, Guang Zhou, China
 TEL. : (020)84860913,84860914
 FAX : (020)84860600
 http : //www.everlight.com

A0008010,Y0008002



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-057-001 REV.: 3

2.4*7.1mm Rectangular Type LED Lamps

PART NO. : 573GD ECN: Page: 2/4

Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	I _F	30	mA
Operating Temperature	T _{opr}	-40 to +85	°C
Storage Temperature	T _{stg}	-40 to +100	°C
Soldering Temperature	T _{sol}	260 ± 5	°C
Power Dissipation	P _d	100	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	I _{F(Peak)}	160	mA
Reverse Voltage	V _R	5	V

Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _v	1	2	/	mcd	I _F = 10 mA
Viewing Angle	2θ 1/2	/	180	/	deg	I _F = 20 mA
Peak Wavelength	λ _p	/	565	/	nm	I _F = 20 mA
Dominant Wavelength	λ _d	/	570	/	nm	I _F = 20 mA
Spectrum Radiation Bandwidth	Δλ	/	30	/	nm	I _F = 20 mA
Forward Voltage	V _F	1.7	2.1	2.4	V	I _F = 20 mA
Reverse Current	I _R	/	/	10	μA	V _R = 5 V



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-057-001 REV.: 3







2.4*7.1mm Rectangular Type LED Lamps

PART NO. : 573GD

ECN : _____ Page: 3/4

Typical Electro-Optical Characteristic Curves:

(G)

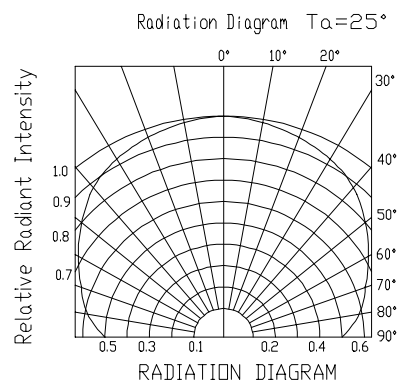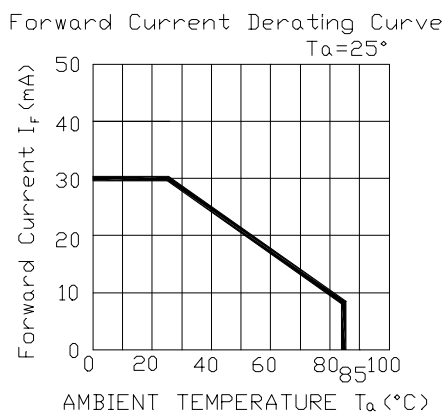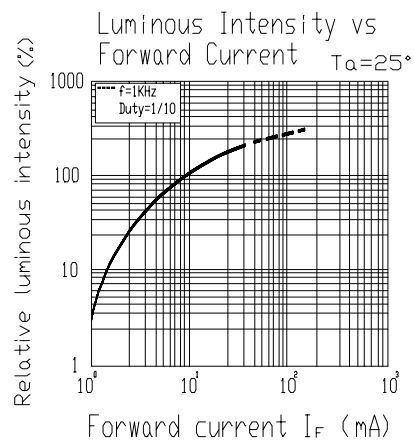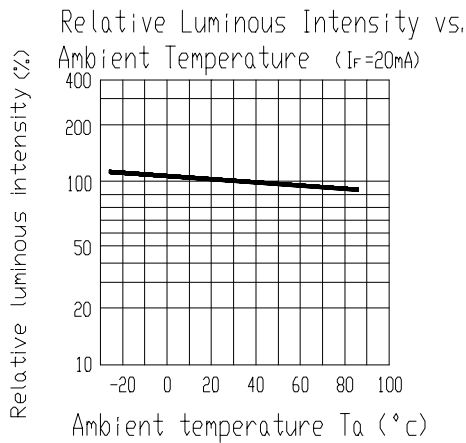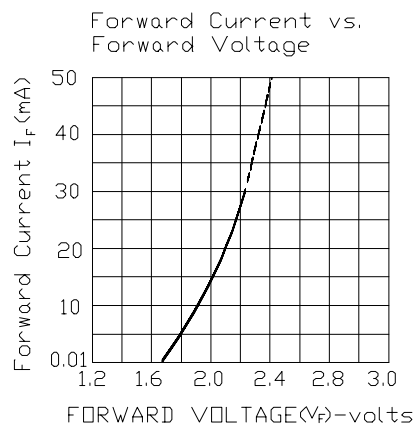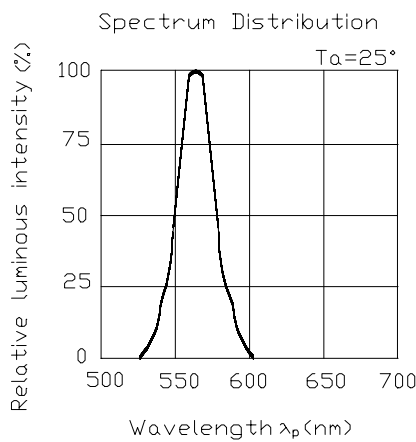



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDLE-057-001 REV.: 3

2.4*7.1mm Rectangular Type LED Lamps

PART NO. : 573GD ECN : _____ Page: 4/4

■ Reliability test items and conditions:

NO	Item	Test Conditions	Test Hours/Cycle		Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C IF = 20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 HRS	76 PCS	0/1