

## HMIC™ SP4T Surface Mount Silicon PIN Diode Switch


Rev. V3

### Features

- Frequency @ 10 GHz & 24 GHz
- Surface Mount Device
- Integrated Bias Network
- No Wire Bonds Required
- Low Current Consumption:  
+12 mA for On State / 0 V for Off Condition
- Rugged, Glass Encapsulated Construction
- Fully Monolithic
- Polymer Scratch Protection
- RoHS Compliant

### Description

The MASW-004240-13170W is a surface mount SP4T switch chip with integrated bias network. It utilizes MACOM's HMIC™ (Heterolithic Microwave Integrated Circuit) process, US Patent 5,268,310, which allows the incorporation of silicon pedestals that form series and shunt diodes or vias by imbedding them in low loss, low dispersion glass. By using small spacing between elements, this combination of silicon and glass gives HMIC devices low loss and high isolation performance with exceptional repeatability through low millimeter frequencies. Patterned gold backside metal allows for manual or re-flow soldering without the need for wire bond connections to the RF and bias ports. The chip may be soldered using 80Au/20Sn, RoHS compliant solders or electrically conductive silver epoxy. The RF bond pads are labeled J1 - J5 and the DC bias bond pads are labeled B2 - B5 and are all 375 µm (15 mils) square.

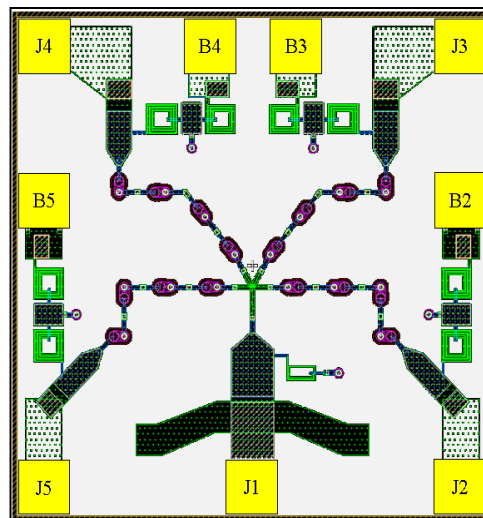

Yellow areas denote backside soldering points for bias and RF connections.

### Applications

The MASW-004240-13170W has been designed for 24 GHz automotive radar sensor applications and is also ideally suited for use at 10 GHz. The switch is turned on by applying a forward current of 12 mA at 4 V to the appropriate bias port and is turned off at 0 V. The RF bias network has been incorporated into the design for ease of use and space considerations.

### Electrical Specifications: Freq. 10 GHz & 24 GHz, T<sub>A</sub> = +25°C


| Parameter         | Test Ports | Test Conditions | Units | Min. | Typ. | Max. |
|-------------------|------------|-----------------|-------|------|------|------|
| Insertion Loss    | J1 to J2   | 12 mA @ B2      | dB    | —    | 2.5  | 3.5  |
|                   | J1 to J3   | 12 mA @ B3      |       |      |      |      |
|                   | J1 to J4   | 12 mA @ B4      |       |      |      |      |
|                   | J1 to J5   | 12 mA @ B5      |       |      |      |      |
|                   | J1 to J5   | 12 mA @ B5      |       |      |      |      |
| Isolation         | J1 to J2   | 12 mA @ B2      | dB    | 40   | 50   | —    |
|                   | J1 to J3   | 12 mA @ B3      |       |      |      |      |
|                   | J1 to J4   | 12 mA @ B4      |       |      |      |      |
|                   | J1 to J5   | 12 mA @ B5      |       |      |      |      |
|                   | J1 to J5   | 12 mA @ B5      |       |      |      |      |
| Input Return Loss | J1 to J2   | 12 mA @ B2      | dB    | —    | 14   | —    |
|                   | J1 to J3   | 12 mA @ B3      |       |      |      |      |
|                   | J1 to J4   | 12 mA @ B4      |       |      |      |      |
|                   | J1 to J5   | 12 mA @ B5      |       |      |      |      |
|                   | J1 to J5   | 12 mA @ B5      |       |      |      |      |

### Absolute Maximum Ratings


| Parameter                           | Absolute Maximum      |
|-------------------------------------|-----------------------|
| Applied Forward Current             | 40 mA                 |
| RF Incident Power                   | 30 dBm CW             |
| Junction Temperature <sup>7,8</sup> | +175°C                |
| Operating Temperature               | -65°C to +125°C       |
| Storage Temperature                 | -65°C to +150°C       |
| Mounting Temperature                | +280°C for 10 seconds |

### Typical Performance Curves


**Insertion Loss**

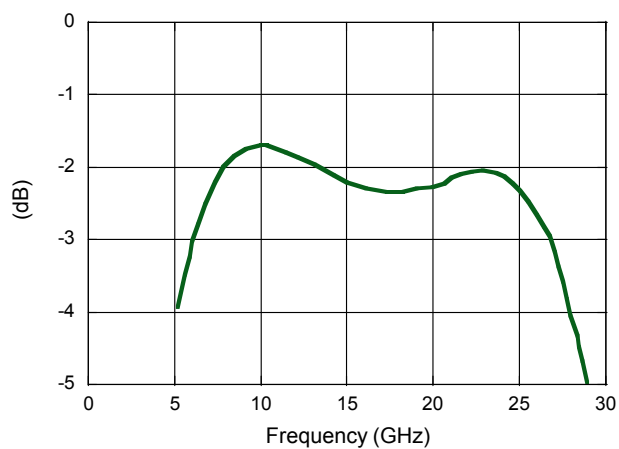


**Isolation**

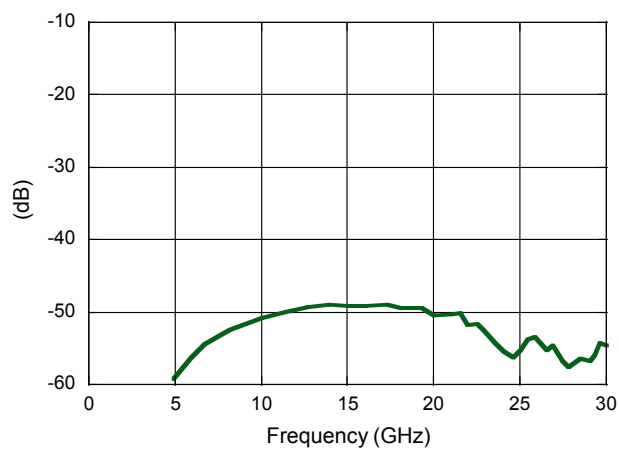


**Input Return Loss**

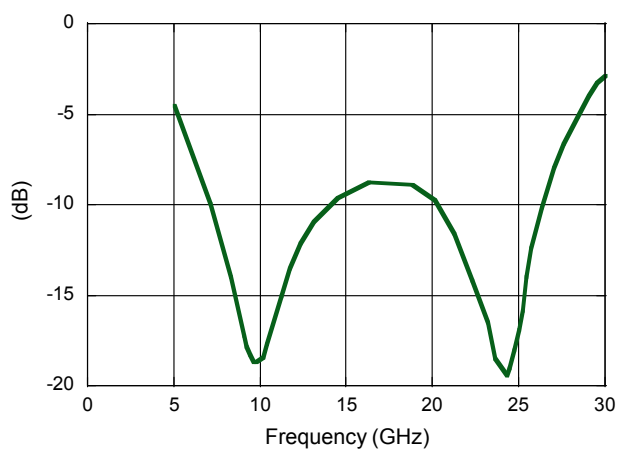

**Output Return Loss**

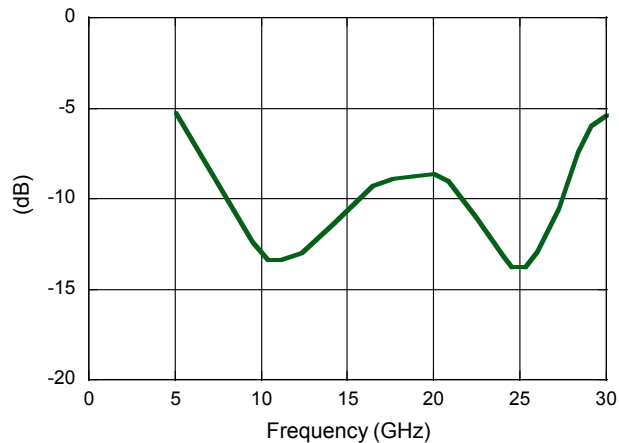

### MASW-004240-13170W Schematic

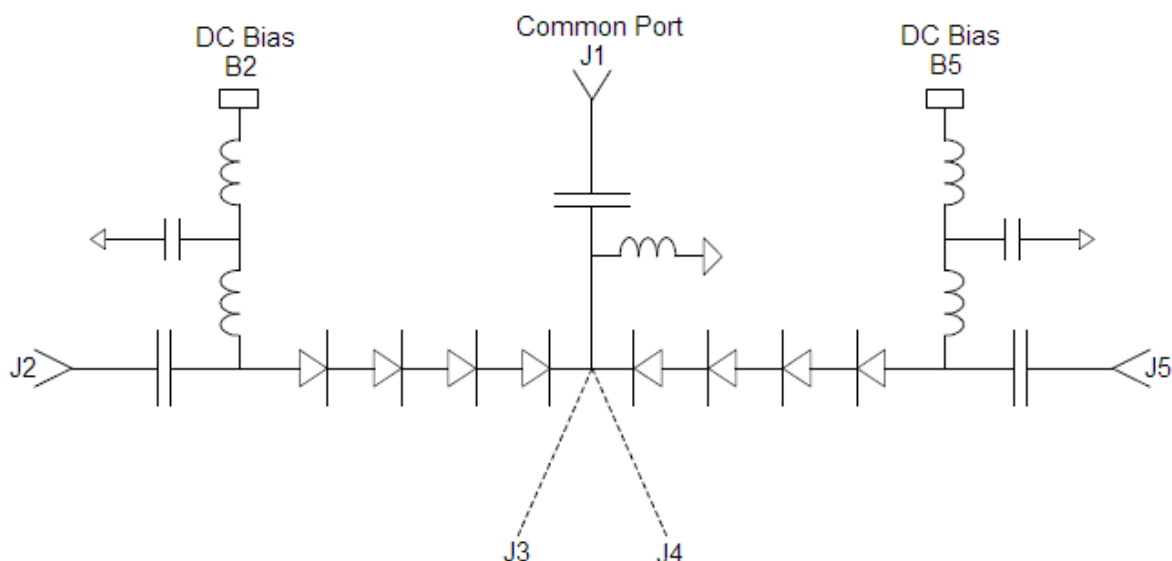


### Operation of the MASW-004240-13170W

Operation of the MASW-004240-13170W PIN diode switch is achieved by simultaneously applying a current of 12 mA DC to the bias port of the on arm and 0 V to the remaining isolated off arms.

### Driver Connections

| Control Level (DC Current) at Port |       |       |       | Condition of RF Output |           |           |           |
|------------------------------------|-------|-------|-------|------------------------|-----------|-----------|-----------|
| B2                                 | B3    | B4    | B5    | J1-J2                  | J1-J3     | J1-J4     | J1-J5     |
| 12 mA                              | 0 V   | 0 V   | 0 V   | Low Loss               | Isolation | Isolation | Isolation |
| 0 V                                | 12 mA | 0 V   | 0 V   | Isolation              | Low Loss  | Isolation | Isolation |
| 0 V                                | 0 V   | 12 mA | 0 V   | Isolation              | Isolation | Low Loss  | Isolation |
| 0 V                                | 0 V   | 0 V   | 12 mA | Isolation              | Isolation | Isolation | Low Loss  |

### Chip Dimensions and Pad Locations<sup>1,2,3</sup>

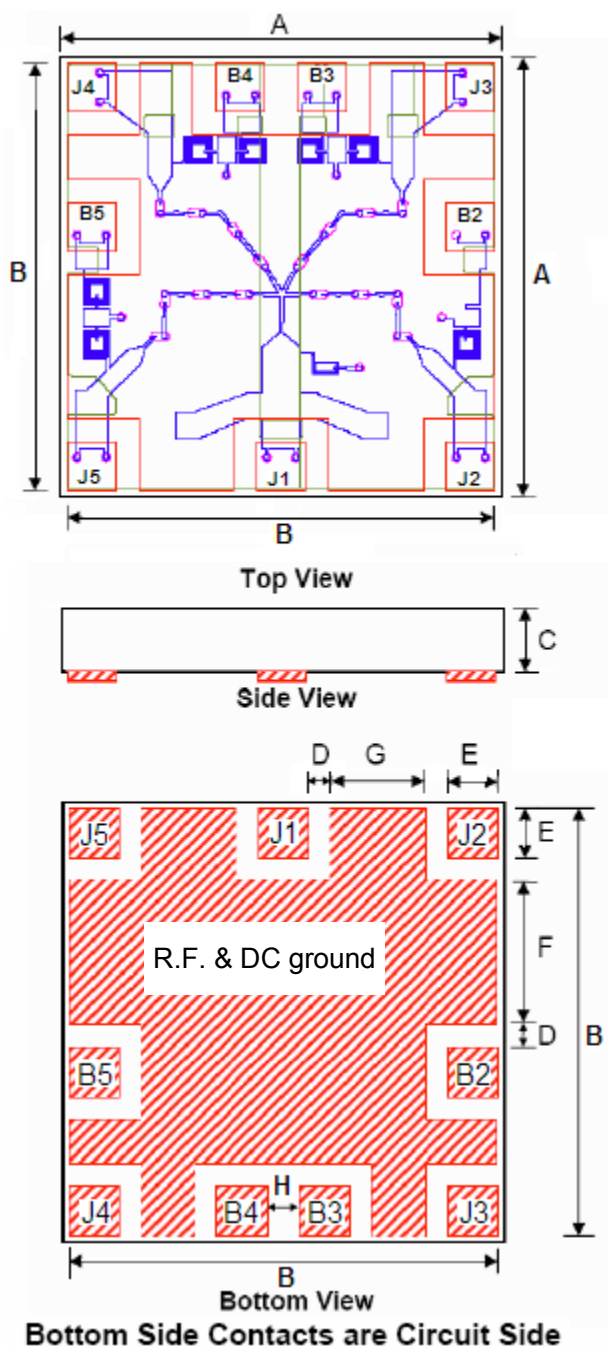

| Chip Dimensions |       |       |             |       |
|-----------------|-------|-------|-------------|-------|
| Dim             | Mils  |       | Millimeters |       |
|                 | Min.  | Max   | Min.        | Max   |
| A               | 132.0 | 134.0 | 3.350       | 3.400 |
| B               | 128.5 | 129.0 | 3.270       | 3.280 |
| C               | 4.0   | 6.0   | 0.102       | 0.152 |
| D               | 6.70  | 7.10  | 0.170       | 0.180 |
| E               | 14.5  | 15.0  | 0.370       | 0.380 |
| F               | 43.3  | 43.7  | 1.100       | 1.110 |
| G               | 28.3  | 28.7  | 0.720       | 0.730 |
| H               | 9.5   | 10.0  | 0.245       | 0.255 |

| Bond Pad Centers |      |     |             |        |
|------------------|------|-----|-------------|--------|
| Dim              | Mils |     | Millimeters |        |
|                  | X    | Y   | X           | Y      |
| J1               | 0    | -57 | 0           | -1.450 |
| J2               | -57  | -57 | 1.450       | -1.450 |
| J3               | 57   | 57  | 1.450       | 1.450  |
| J4               | -57  | 57  | -1.450      | 1.450  |
| J5               | -57  | -57 | -1.450      | -0.145 |
| B2               | -57  | 15  | 1.450       | 0.380  |
| B3               | 12   | 57  | 0.313       | 1.450  |
| B4               | -12  | 57  | -0.313      | 1.450  |
| B5               | -57  | 15  | -1.450      | 0.380  |

#### Notes:

1. Backside metallization thickness is 0.01  $\mu\text{m}$ .
2. Hatched areas indicate backside ohmic gold contacts
3. Bond pad centers are referenced from chip center.

## Die Attachment and Handling Guidelines

### Handling

All semiconductor chips should be handled with care to avoid damage or contamination from perspiration and skin oils. The use of plastic tipped tweezers or vacuum pickups is strongly recommended for individual components. Bulk handling should insure that abrasion and mechanical shock are minimized.

### Bonding

Attachment to a circuit board is made simple through the use of surface mount technology. Mounting pads are conveniently located on the bottom surface of these devices and are removed from the active junction locations. These devices are well suited for solder or conductive epoxy attachment onto hard or soft substrates. The use of 60Pb/40Sn, 80Au/20Sn or any RoHS lead-free solder is recommended to achieve the lowest series resistance and optimum heat sink. .

When soldering these devices a hot gas or oven re-flow process is preferred. We recommend utilizing a vacuum tip and applying a downward force of 40 - 60 grams to the top surface of the device. When soldering, position the die so that its mounting pads are aligned with the circuit board mounting pads and reflow the solder by heating the circuit trace near the mounting pads while applying 40 to 60 grams of force perpendicular to the top surface of the die. All mounting pads should be heated simultaneously so that the solder under the pads flows at the same time. Avoid soldering the pads one at a time as doing so would produce an un-equal heat flow and potentially create thermal stress to the chip.

Solder reflow should not be performed by causing the heat to flow through the top surface of the die. Die should be uniformly heated in a re-flow oven. A typical heating profile and handling instructions are provided in Application Notes, [M538 Surface Mounting Instructions](#) and [M541 Bonding and Handling Procedures](#) on the MACOM website at [www.macom.com](http://www.macom.com)

Conductive silver epoxy may also be used for die attachment, in lower Incident power applications where the average power is <1W. Apply a thin controlled amount approximately 1- 2 mils thick to minimize ohmic and thermal stresses. Take care not to bridge the gap between the chip pads with epoxy. A thin epoxy fillet should be visible around the perimeter of the pads after placement to ensure full coverage. Cure per epoxy per manufacturer's recommended schedule. Typically 150°C for 1 hour.

## Ordering Information

| Part Number        | Package     |
|--------------------|-------------|
| MASW-004240-13170W | Waffle Pack |

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.