



Product Specification

XBLW LM331


Precision Voltage-to-Frequency Converters

WEB | www.xinboleic.com



Descriptions

The voltage-frequency converter delivers an output pulse train to the applied input voltage at a precisely proportional frequency. The LM331 can convert the output frequency from 1Hz to 100KHz at a power supply as low as 4V. It is well suited for use in simple low-cost circuits for analog-to-digital conversion, long-term integration, LFM or demodulation, frequency-voltage conversion, and many other functions.

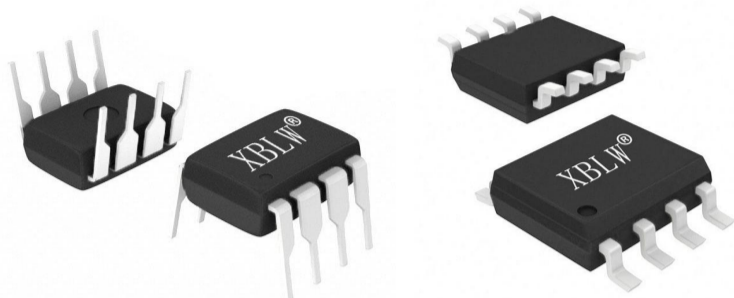

DIP-8

SOP-8

Feature

- Guaranteed linearity 0.01% max
- Low power consumption: 15 mW typical at 5V
- Wide range of full scale frequency: 1 Hz to 100 kHz
- Pulse output compatible with all logic forms
- Wide dynamic range, 100 dB min at 10 kHz full scale frequency


Applications

- Voltage to Frequency Conversions
- Frequency to Voltage Conversions
- Remote-Sensor Monitoring
- Tachometers

Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW LM331N	DIP-8	LM331N	Tube	2000pcs/Box
XBLW LM331DTR	SOP-8	LM331	Tape	2500pcs/Reel

SCHEMATIC DIAGRAM

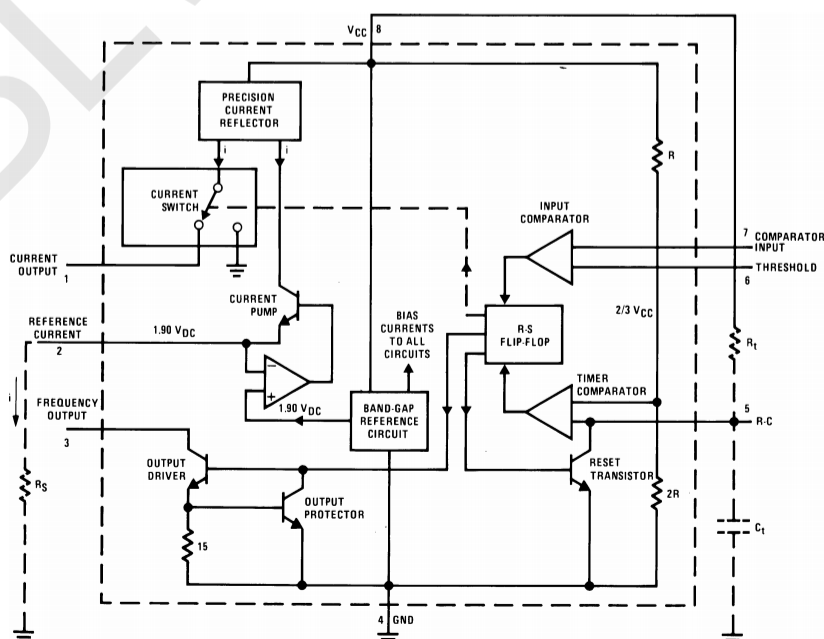

EXTREME RATINGS

TA=25°C, unless otherwise noted


Parameter	Symbol	Value	Unit
Supply Voltage	V _{CC}	40	V
Input Voltage	V _i	-0.2~+V _{CC}	V
Operating Temperature	T _{OPR}	0~+70	°C
Power Dissipation	P _D	500	mW

ELECTRICAL CHARACTERISTICS

TA=25°C, V_{CC}=5V, unless otherwise noted

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
VFC Non-Linearity	VFCNL	4.5<V _{CC} 20V		±0.00 3	±0.01	%Full-Scale
Conversion Accuracy Scale Factor (Gain)	ACCUR	M=-10V, R _s =14KΩ	0.90	1.00	1.10	KHz/V
Change of Gain with V _S	V _{CC} Δ G/V _{CC}	4.5V<V _{CC} <10V		0.01	0.1	% / V
		10V<V _{CC} <40V		0.006	0.06	
Rated Full-Scale Frequency	f	V=-10V	10.0			KHz
INPUT COMPARATOR						
Offset Voltage	V _{IO}	0°C<T _A <+70°C		±3	±10	mV
Bias Current	I _{BIAS}			-80	-300	nA
Offset Current	I _{IO}			±8	±100	nA
Common-Mode Range	V _{cm}	0°C<T _A <+70°C	-0.2		V _{CC} -2.0	V
TIMER(PIN 5)						
Timer Threshold Voltage, Pin 5	V _{TH}		0.63	0.667	0.701	
Input Bias Current, Pin 5	I _{BIAS}	V _{CC} =15V, 0V<V ₅ <9.9V		±10	±100	nA
		V ₅ =10V		200	1000	nA
Saturation Voltage	V _{SAT}	I=5mA		0.22	0.5	V
CURRENT SOURCE(PIN1)						
Output Current	I _O	R _s =14KΩ, V _i =0V	116	136	156	μA
Change with Voltage	ΔI _O /ΔV _i	0V<V _i <10V	m	0.2	1.0	μA
Current Source OFF Leakage	I _{LKG}			0.02	10.0	nA
REFERENCE VOLTAGE (PIN 2)						
Reference Voltage	V _{REF}		1.70	1.89	2.08	VDC
Stability vs. Temperature	S _{TT}			160		ppm/°C
Stability vs. Time, 1000 Hours	S _{TT}			±0.1		%
LOGIC OUTPUT (PIN 3)						
Saturation Voltage	V _{SAT}	I=5mA		0.15	0.50	V
		I=3.2mA		0.10	0.40	
OFF Leakage	I _{LKG}			±0.05	1.0	μA
SUPPLY CURRENT						
SUPPLY CURRENT	I _{CC}	V _{CC} =5V	1.5	3.0	6.0	mA
		V _{CC} =40V	2.0	4.0		

PINS CONFIGURATIONS

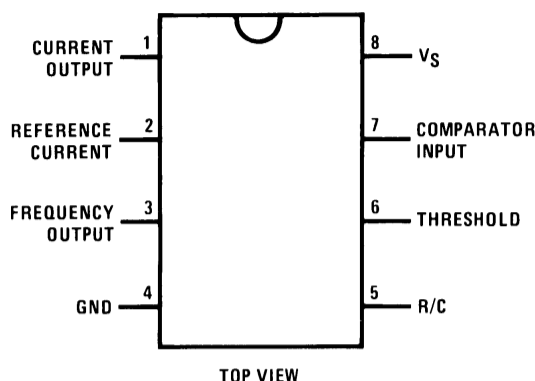

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
IOUT	1	O	Current Output
IREF	2	I	Reference Current
FOUT	3	O	Frequency Output. This output is an open-collector output and requires a pullup resistor.
GND	4	G	Ground
RC	5	I	R-C filter input
THRESH	6	I	Threshold input
COMPIN	7	I	Comparator Input
VS	8	P	Supply Voltage

APPLICATIONS

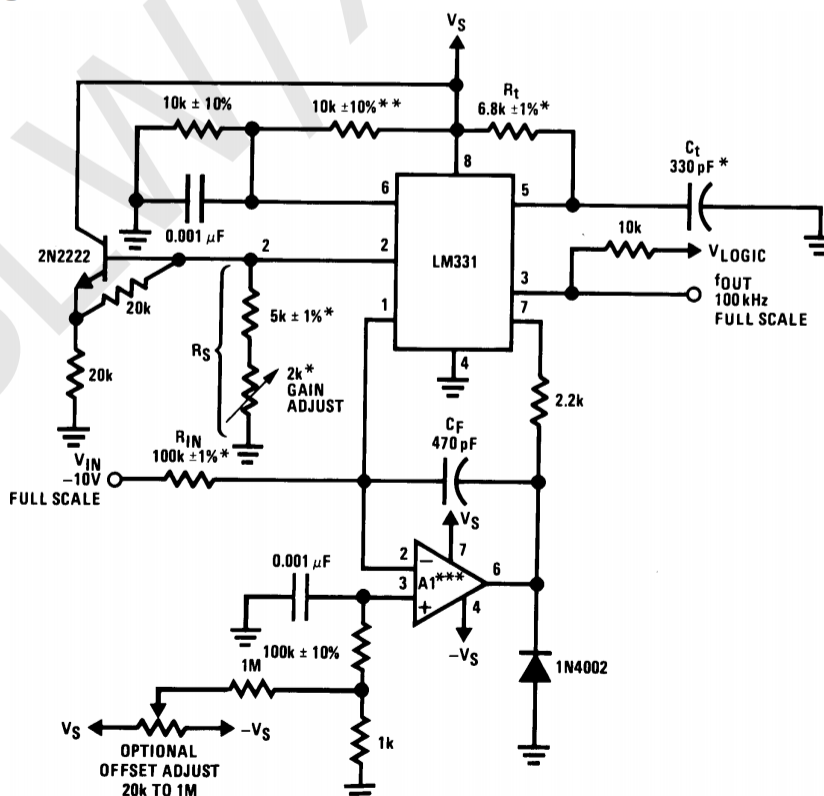


Figure 1 Precision Voltage-to-Frequency Converter,
100 kHz Full-Scale, $\pm 0.03\%$ Non-Linearity

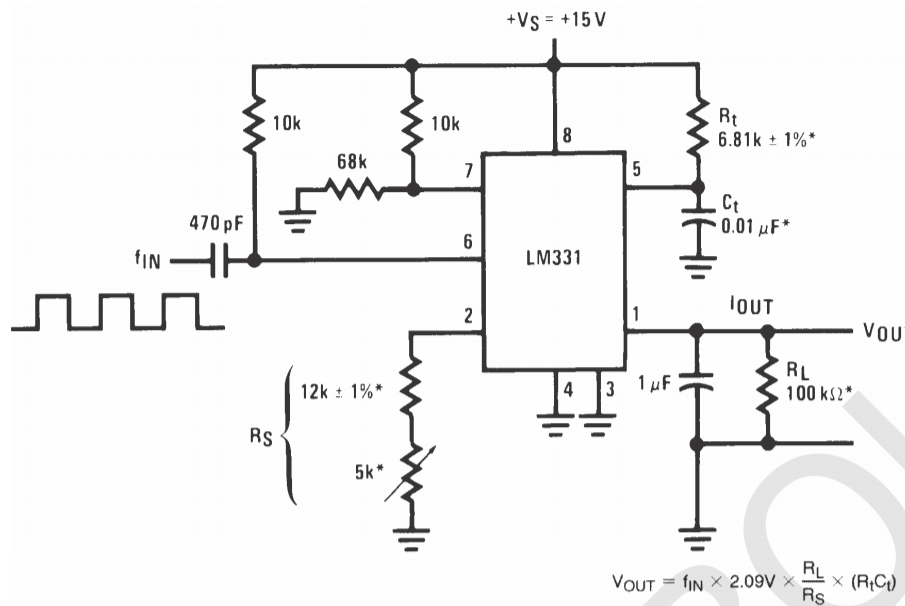


Figure 2 Simple Frequency-to-Voltage Converter,
10 kHz Full-Scale, $\pm 0.06\%$ Non-Linearity


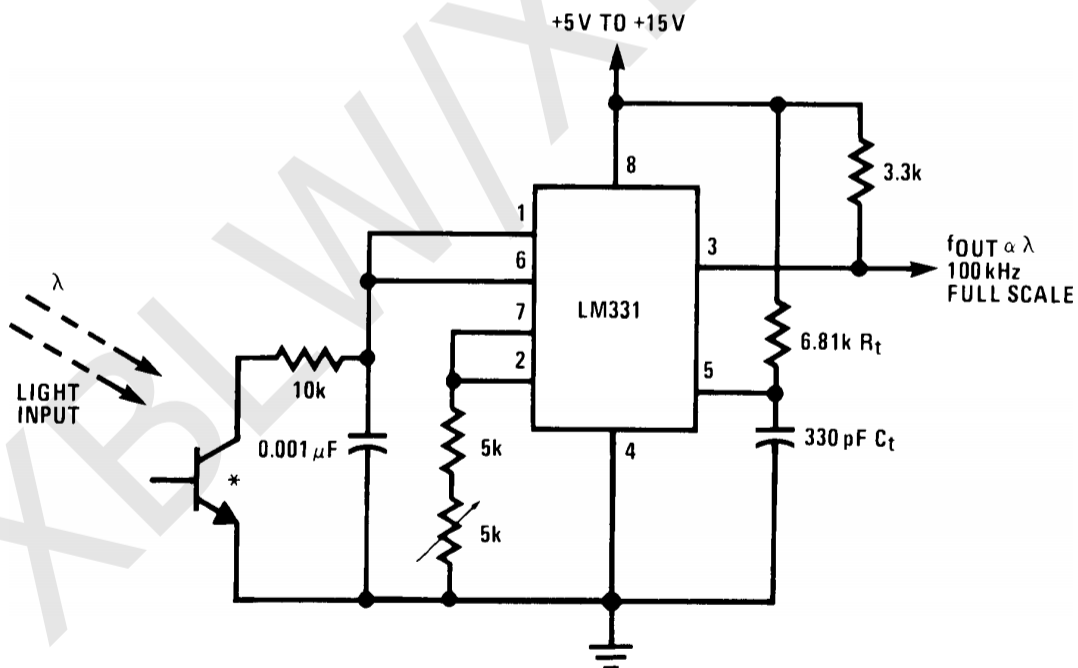


Figure 3 Light Intensity to Frequency Converter

Package Information


• DIP-8

Symbol	Size	Dimensions In Millimeters		Symbol	Size	Dimensions In Inches	
		Min(mm)	Max(mm)			Min(in)	Max(in)
A		3.710	4.310	A		0.146	0.170
A1		0.510		A1		0.020	
A2		3.200	3.600	A2		0.126	0.142
B		0.380	0.570	B		0.015	0.022
B1		1.524 (BSC)		B1		0.060 (BSC)	
C		0.204	0.360	C		0.008	0.014
D		9.000	9.400	D		0.354	0.370
E		6.200	6.600	E		0.244	0.260
E1		7.320	7.920	E1		0.288	0.312
e		2.540 (BSC)		e		0.100 (BSC)	
L		3.000	3.600	L		0.118	0.142
E2		8.400	9.000	E2		0.331	0.354

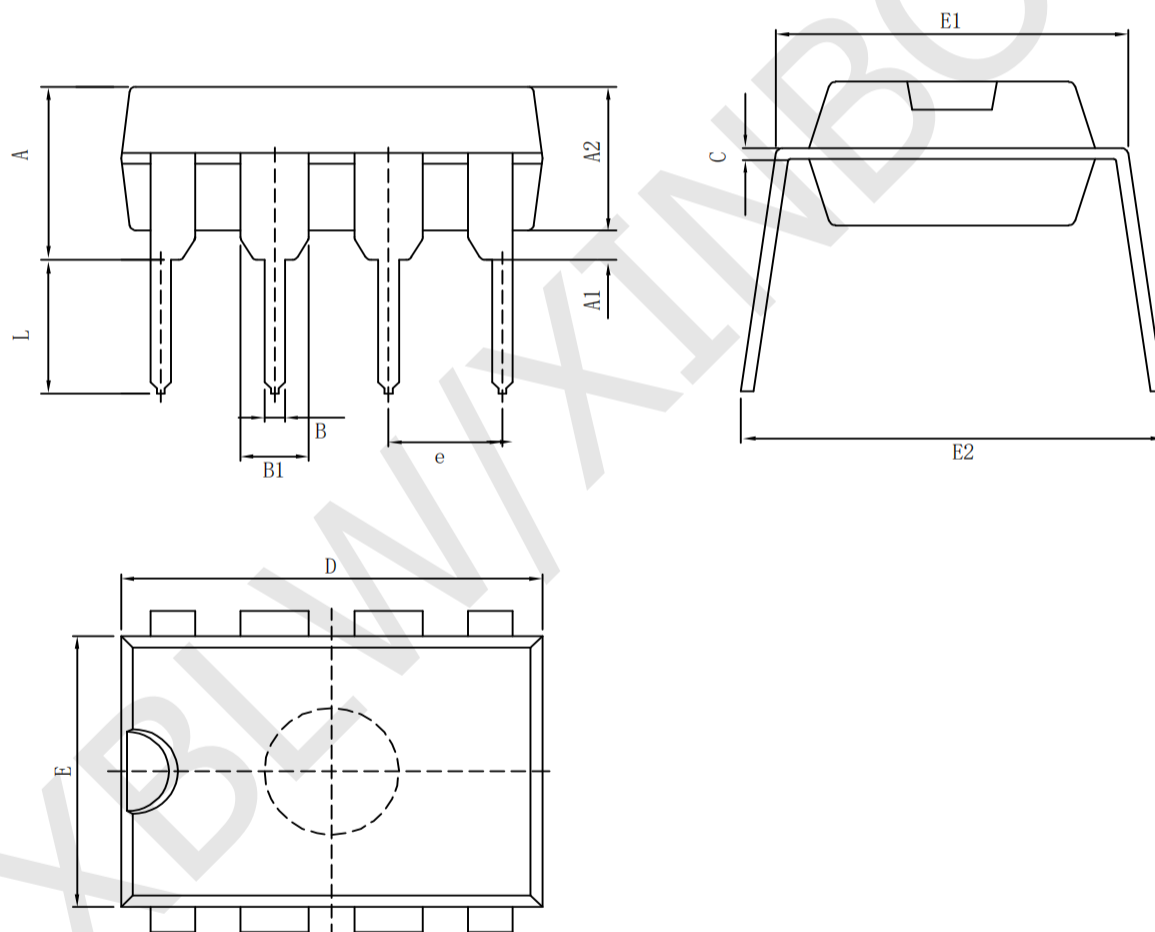

• SOP-8

Symbol	Size	Dimensions In Millimeters		Symbol	Size	Dimensions In Inches	
		Min (mm)	Max (mm)			Min (in)	Max (in)
A		1.350	1.750	A		0.053	0.069
A1		0.100	0.250	A1		0.004	0.010
A2		1.350	1.550	A2		0.053	0.061
b		0.330	0.510	b		0.013	0.020
c		0.170	0.250	c		0.006	0.010
D		4.700	5.100	D		0.185	0.200
E		3.800	4.000	E		0.150	0.157
E1		5.800	6.200	E1		0.228	0.224
e		1.270 (BSC)		e		0.050 (BSC)	
L		0.400	1.270	L		0.016	0.050
θ		0°	8°	θ		0°	8°

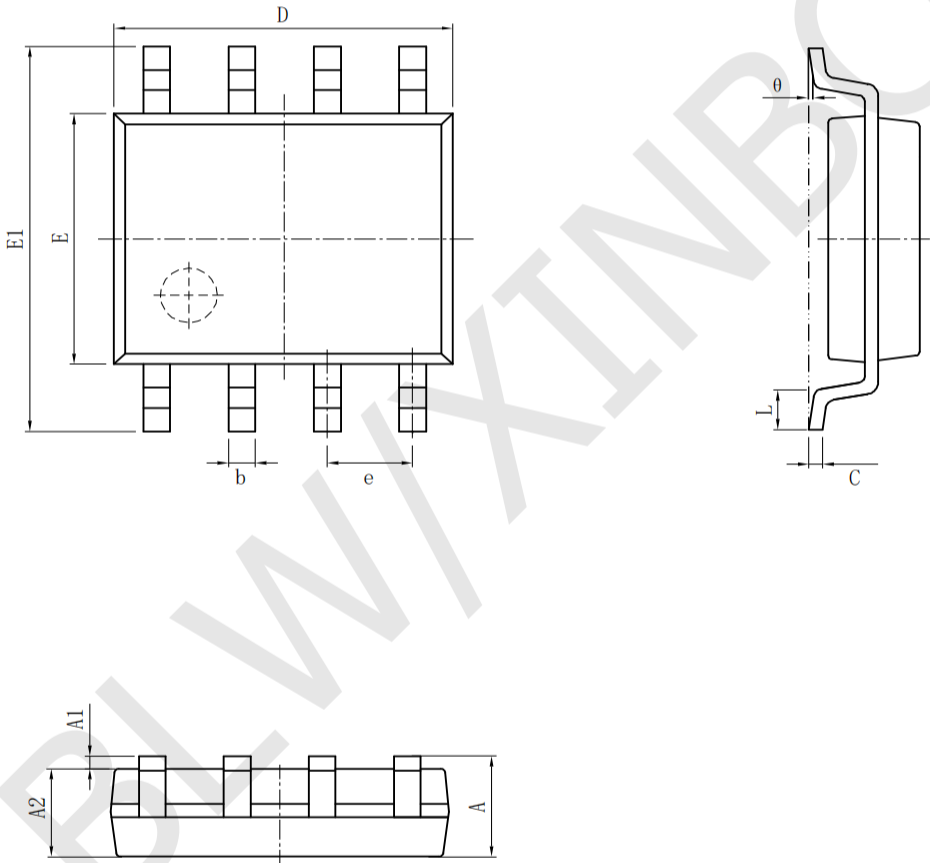

Statement:

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW products have not been licensed for life support, military, and aerospace applications, and therefore XBLW is not responsible for any consequences arising from the use of this product in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.