


# ESP32-C3-DevKitM-1

[中文]

This user guide will help you get started with ESP32-C3-DevKitM-1 and will also provide more in-depth information.

ESP32-C3-DevKitM-1 is an entry-level development board based on [ESP32-C3-MINI-1](#), a module named for its small size. This board integrates complete Wi-Fi and Bluetooth LE functions.

Most of the I/O pins on the ESP32-C3-MINI-1 module are broken out to the pin headers on both sides of this board for easy interfacing. Developers can either connect peripherals with jumper wires or mount ESP32-C3-DevKitM-1 on a breadboard.

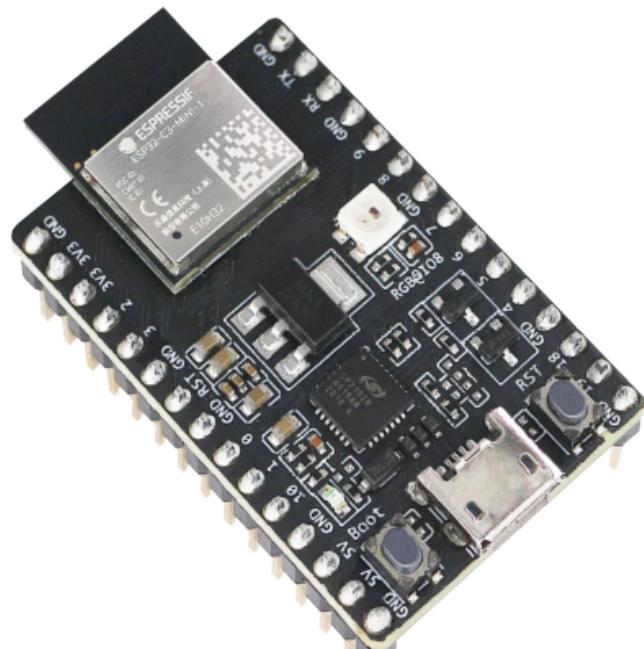

ESP32-C3-DevKitM-1

The document consists of the following major sections:


- [Getting Started](#): Overview of ESP32-C3-DevKitM-1 and hardware/software setup instructions to get started.
- [Hardware Reference](#): More detailed information about the ESP32-C3-DevKitM-1's hardware.

- **Hardware Revision Details:** Revision history, known issues, and links to user guides for previous versions (if any) of ESP32-C3-DevKitM-1.
- **Related Documents:** Links to related documentation.

## Getting Started

This section provides a brief introduction of ESP32-C3-DevKitM-1, instructions on how to do the initial hardware setup and how to flash firmware onto it.

## Description of Components

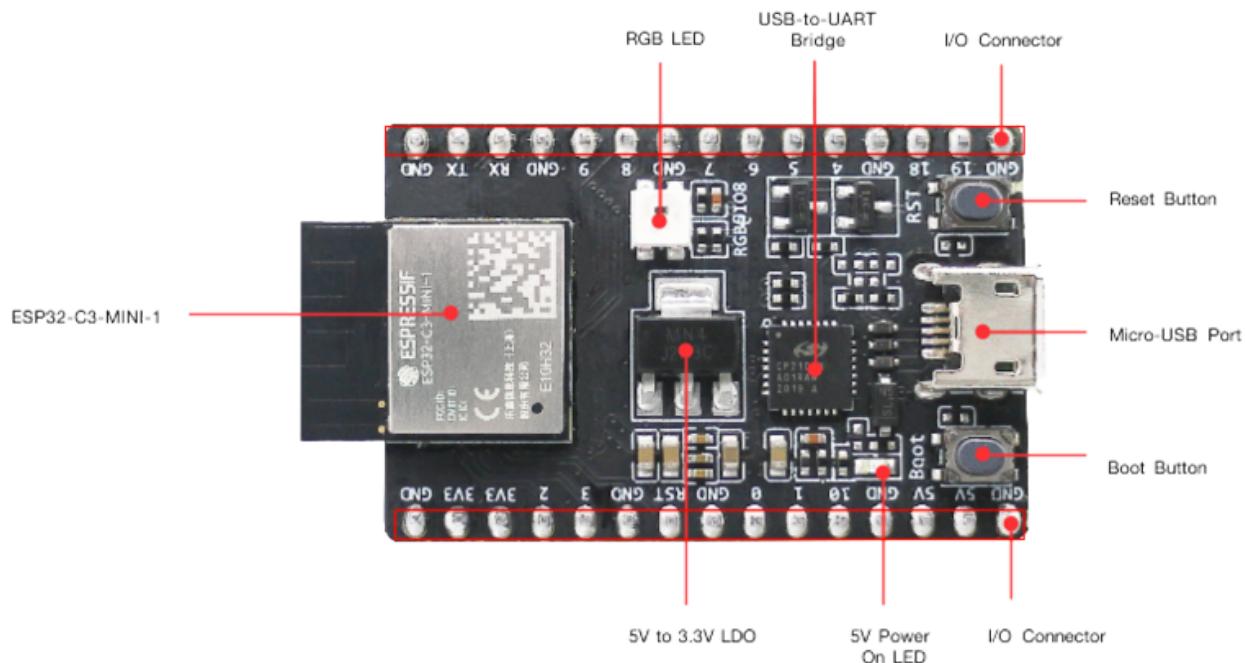

ESP32-C3-DevKitM-1 - front

Key Component	Description
ESP32-C3-MINI-1	ESP32-C3-MINI-1 is a general-purpose Wi-Fi and Bluetooth LE controller.
5 V to 3.3 V LDO	Power regulator that converts a 5 V supply into a 3.3 V output.
5 V Power On LED	Turns on when the USB power is connected to the board.
I/O Connector	All available GPIO pins (except for the SPI bus for flash) are broken out to this header.
Boot Button	Download button. Holding down <b>Boot</b> and then pressing <b>Reset</b> initializes the board.
Micro-USB Port	USB interface. Power supply for the board as well as the communication port.
Reset Button	Press this button to restart the system.
USB to UART Bridge	Single USB-UART bridge chip provides transfer rates up to 3 Mbp.
RGB LED	Addressable RGB LED (WS2812), driven by GPIO8.

# Start Application Development

Before powering up your ESP32-C3-DevKitM-1, please make sure that it is in good condition with no obvious signs of damage.

## Required Hardware

- ESP32-C3-DevKitM-1
- USB 2.0 cable (Standard-A to Micro-B)
- Computer running Windows, Linux, or macOS

## Software Setup

Please proceed to [Get Started](#), where Section [Installation Step by Step](#) will quickly help you set up the development environment and then flash an application example onto your ESP32-C3-DevKitM-1.

## Contents and Packaging

### Retail Orders

If you order one or several samples, each ESP32-C3-DevKitM-1 comes in an individual package in either antistatic bag or any packaging depending on your retailer.

For retail orders, please go to <https://www.espressif.com/en/company/contact/buy-a-sample>.

### Wholesale Orders


If you order in bulk, the boards come in large cardboard boxes.

For wholesale orders, please go to <https://www.espressif.com/en/contact-us/sales-questions>.

## Hardware Reference

### Block Diagram

The block diagram below shows the components of ESP32-C3-DevKitM-1 and their interconnections.

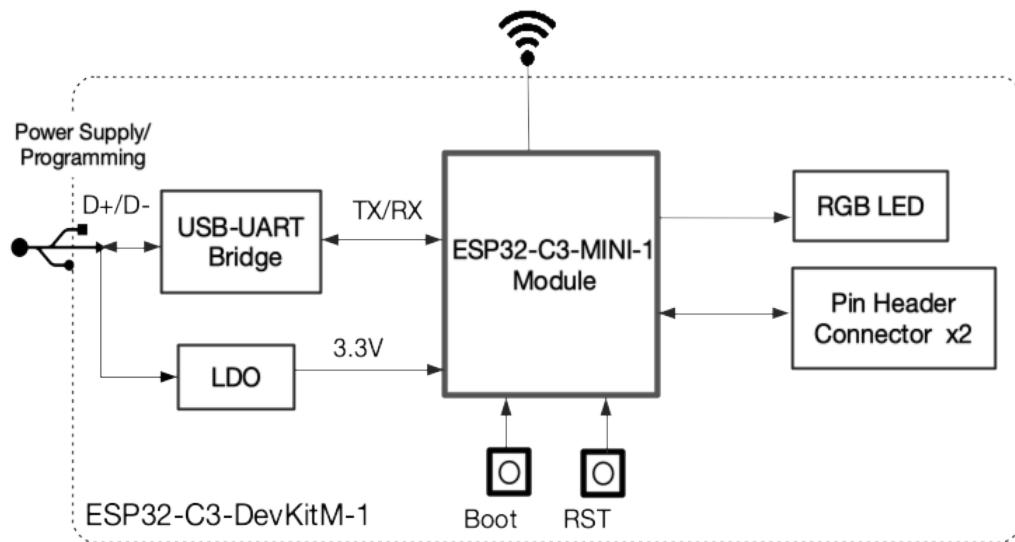

*ESP32-C3-DevKitM-1 (click to enlarge)*

## Power Supply Options

There are three mutually exclusive ways to provide power to the board:

- Micro-USB port, default power supply
- 5V and GND pin headers
- 3V3 and GND pin headers

It is recommended to use the first option: micro-USB port.

## Header Block

The two tables below provide the **Name** and **Function** of the pin headers on both sides of the board (J1 and J3). The pin header names are shown in [ESP32-C3-DevKitM-1 - front](#). The numbering is the same as in the [ESP32-C3-DevKitM-1 Schematic \(PDF\)](#).

### J1

No.	Name	Type <sup>1</sup>	Function
1	GND	G	Ground
2	3V3	P	3.3 V power supply
3	3V3	P	3.3 V power supply
4	IO2	I/O/T	GPIO2 <sup>2</sup> , ADC1_CH2, FSPIQ
5	IO3	I/O/T	GPIO3, ADC1_CH3
6	GND	G	Ground
7	RST	I	CHIP_PU

No.	Name	Type <sup>1</sup>	Function
8	GND	G	Ground
9	IO0	I/O/T	GPIO0, ADC1_CH0, XTAL_32K_P
10	IO1	I/O/T	GPIO1, ADC1_CH1, XTAL_32K_N
11	IO10	I/O/T	GPIO10, FSPICSO
12	GND	G	Ground
13	5V	P	5 V power supply
14	5V	P	5 V power supply
15	GND	G	Ground

### J3

No.	Name	Type <sup>1</sup>	Function
1	GND	G	Ground
2	TX	I/O/T	GPIO21, U0TXD
3	RX	I/O/T	GPIO20, U0RXD
4	GND	G	Ground
5	IO9	I/O/T	GPIO9 <sup>2</sup>
6	IO8	I/O/T	GPIO8 <sup>2</sup> , RGB LED
7	GND	G	Ground
8	IO7	I/O/T	GPIO7, FSPID, MTDO
9	IO6	I/O/T	GPIO6, FSPICLK, MTCK
10	IO5	I/O/T	GPIO5, ADC2_CH0, FSPIWP, MTDI
11	IO4	I/O/T	GPIO4, ADC1_CH4, FSPIHD, MTMS
12	GND	G	Ground
13	IO18	I/O/T	GPIO18, USB_D-
14	IO19	I/O/T	GPIO19, USB_D+
15	GND	G	Ground

1([1,2](#))


P: Power supply; I: Input; O: Output; T: High impedance.

2(1,2,3)

GPIO2, GPIO8, and GPIO9 are strapping pins of the ESP32-C3FN4 chip. During the chip's system reset, the latches of the strapping pins sample the voltage level as strapping bits, and hold these bits until the chip is powered down or shut down. For description and application of strapping pins, please refer to Section [Strapping Pins](#) in [ESP32-C3 Datasheet](#).

## Pin Layout

ESP32-C3-DevKitM-1

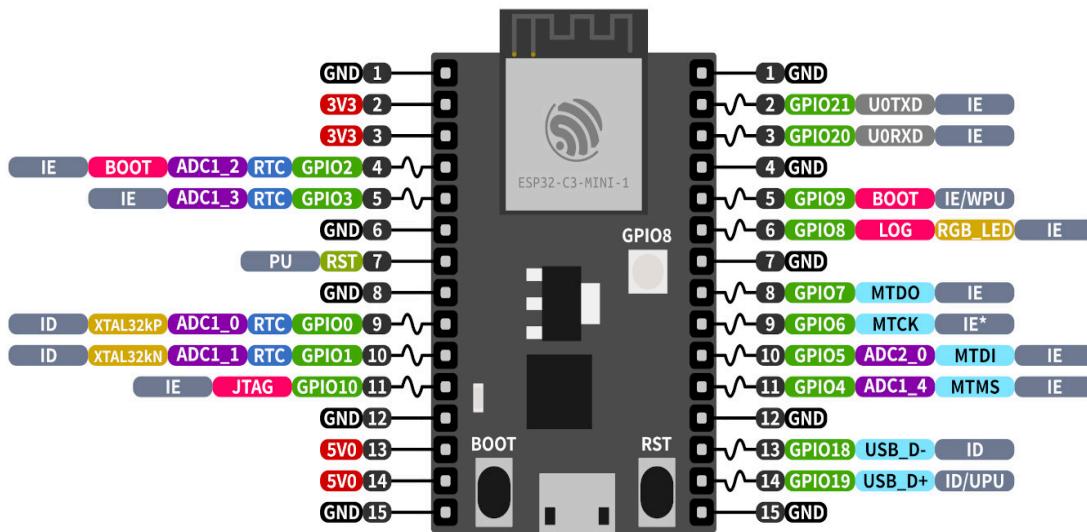

### ESP32-C3 Specs

32-bit RISC-V single-core @160MHz  
Wi-Fi IEEE 802.11 b/g/n 2.4GHz  
Bluetooth LE 5  
400 KB SRAM (16 KB for cache)  
384 KB ROM  
22 GPIOs, 3x SPI, 2x UART, I2C, I2S, RMT, LED PWM, USB Serial/JTAG, GDMA, TWAI®, 12-bit ADC

PWM Capable Pin  
GPIO<sub>IN</sub> GPIO Input Only  
GPIO<sub>OUT</sub> GPIO Input and Output  
DAC\_X Digital-to-Analog Converter  
JTAG/USB JTAG for Debugging and USB  
FLASH External Flash Memory (SPI)  
ADC<sub>CH</sub> Analog-to-Digital Converter  
TOUCH<sub>X</sub> Touch Sensor Input Channel  
OTHER Other Related Functions  
SERIAL Serial for Debug/Programming  
ARDUINO Arduino Related Functions  
STRAP Strapping Pin Functions

RTC RTC Power Domain (VDD3P3\_RTC)  
GND Ground  
PWD Power Rails (3V3 and 5V)

**GPIO STATE**  
UPU: USB Weak Pull-up  
WPU: Weak Pull-up (Internal)  
WPD: Weak Pull-down (Internal)  
PU: Pull-up (External)  
IE: Input Enable (After Reset)  
ID: Input Disabled (After Reset)  
OE: Output Enable (After Reset)  
OD: Output Disabled (After Reset)

*ESP32-C3-DevKitM-1 Pin Layout (click to enlarge)*

## Hardware Revision Details

No previous versions available.

## Related Documents

- [Build Secure and Cost-effective Connected Devices with ESP32-C3](#)
- [ESP32-C3 Datasheet \(PDF\)](#)
- [ESP32-C3-MINI-1 Datasheet \(PDF\)](#)
- [ESP32-C3-DevKitM-1 Schematic \(PDF\)](#)
- [ESP32-C3-DevKitM-1 PCB Layout \(PDF\)](#)

- [ESP32-C3-DevKitM-1 Dimensions \(PDF\)](#)
- [ESP32-C3-DevKitM-1 Dimensions source file \(DXF\)](#) - You can view it with [Autodesk Viewer](#) online

For further design documentation for the board, please contact us at [sales@espressif.com](mailto:sales@espressif.com).

[Provide feedback about this document](#)