

Description

The TLV431BQDBZR-CN is a programmable shunt voltage reference with guaranteed temperature stability over the entire temperature range of operation.

The output voltage may be set to any value between 2.5V and 36V with two external resistors.

The TLV431BQDBZR-CN operates with a wide current range from 1 to 100mA with a typical dynamic impedance of 0.22Ω.

Features

- Adjustable Output Voltage: 2.5 to 36V
- Sink Current Capability: 1 to 100mA
- Typical Output Impedance: 0.22Ω
- 0.5% ,1% And 2% Voltage Precision

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Cathode to Anode Voltage	V_{KA}	37	V
Continuous Cathode Current Range	I_K	-100 to +150	mA
Reference Input Current Range	I_{REF}	-0.05 to +10	μA
Power Dissipation	P_D	300	mW
Storage Temperature Range	T_{STG}	-55 ~ + 150	°C

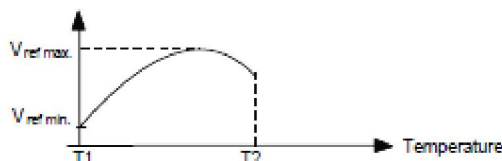
Electrical Characteristics $T_{amb} = 25^\circ\text{C}$ (unless otherwise specified)

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Reference Input Voltage	V_{REF}	$V_{KA} = V_{REF}, I_K = 10\text{mA}$ $T_A = 25^\circ\text{C}$	2.440	2.495	2.550	V
Reference Input Voltage Deviation Over-Temperature Range - note 1	$\frac{\Delta V_{REF}}{\Delta T}$	$V_{KA} = V_{REF}, I_K = 10\text{mA}$, $T_{MIN} \leq T_A \leq T_{MAX}$		4.5	17	mV
Ratio of Change in Reference Input Voltage to Change in Cathode to Anode Voltage - (figure 2)	$\frac{\Delta V_{REF}}{\Delta V_{KA}}$	$I_K = 10\text{mA}$ $\Delta V_{KA} = 10\text{V to } V_{REF}$		-1.4	-2.7	mV/V
				-1.5	-2.0	
Reference Input Current	I_{REF}	$I_K = 10\text{mA}, R_1 = 10\text{k}\Omega, R_2 = \infty$		1.8	4	μA
Reference Input Current Deviation Over Temperature Range	$\frac{\Delta I_{REF}}{\Delta T}$	$I_K = 10\text{mA}, R_1 = 10\text{k}\Omega, R_2 = \infty$ $T_A = \text{full range}$		0.4	1.2	μA
Minimum Cathode Current for Regulation	I_{MIN}	$V_{KA} = V_{REF}$		0.5	1.0	mA
Off-State Cathode Current	$I_{KA(off)}$	$V_{KA} = 36\text{V}, V_{REF} = 0$		0.05	1.0	μA
Dynamic Impedance - note 2	$ Z_{KA} $	$V_{KA} = V_{REF}, I_K = 1 \text{ to } 100\text{mA}$, $f \leq 1\text{kHz}$		0.20	0.5	Ω

Notes:


1) ΔV_{REF} is defined as the difference between the maximum and minimum values obtained over the full temperature range.







$\Delta V_{REF} = V_{REF \text{ max.}} - V_{REF \text{ min.}}$



2) The dynamic Impedance is defined as $|Z_{KA}| = \Delta V_{KA} / \Delta I_K$

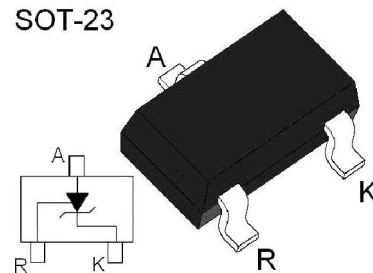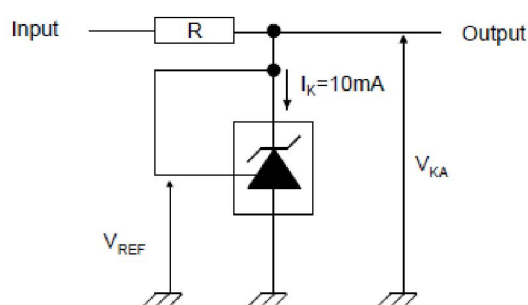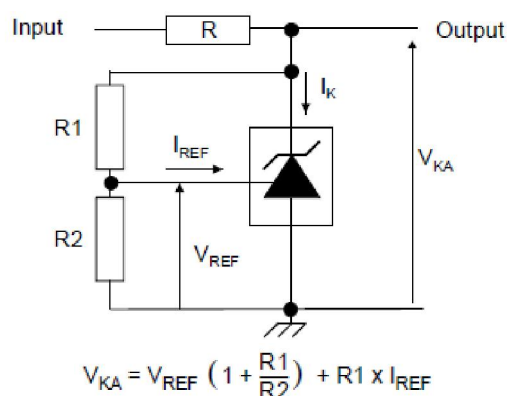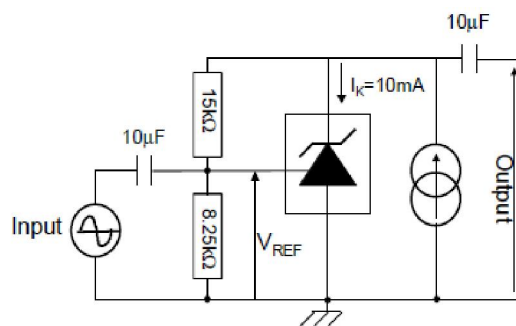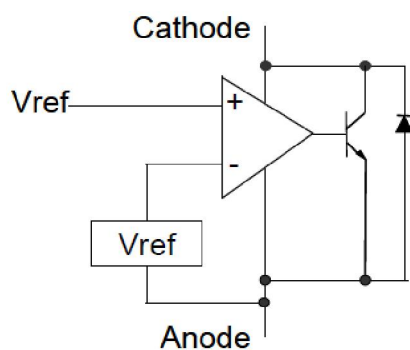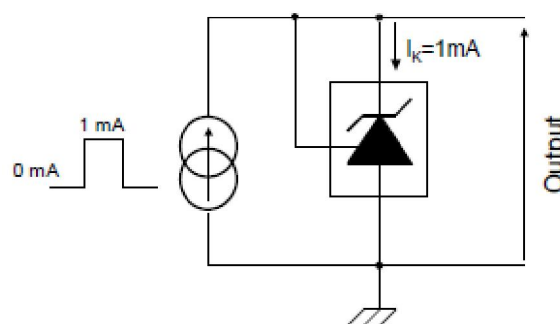SOT-23



Test Circuits

Figure 1 : Test Circuit for $V_{KA} = V_{REF}$

Figure 2 : Test Circuit for $V_{KA} > V_{REF}$

Figure 3 : Test Circuit for I_{OFF}

Figure 4 : Test Circuit for Phase Margin and Voltage Gain

Figure 5 : Block diagram

Figure 6 : Test Circuit for Response time

Typical Characteristics

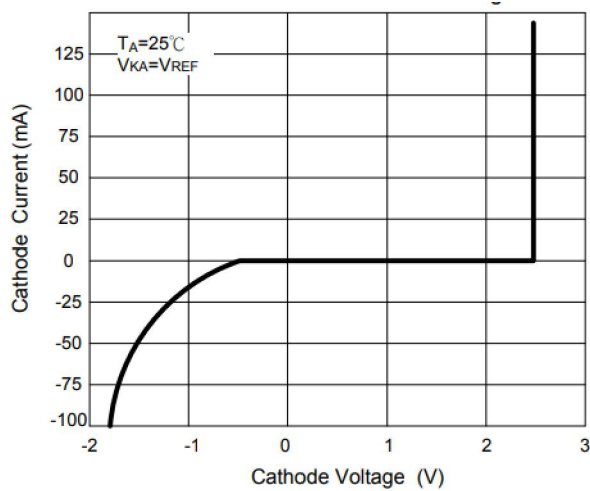


Figure 1. Cathode Current vs. Cathode Voltage

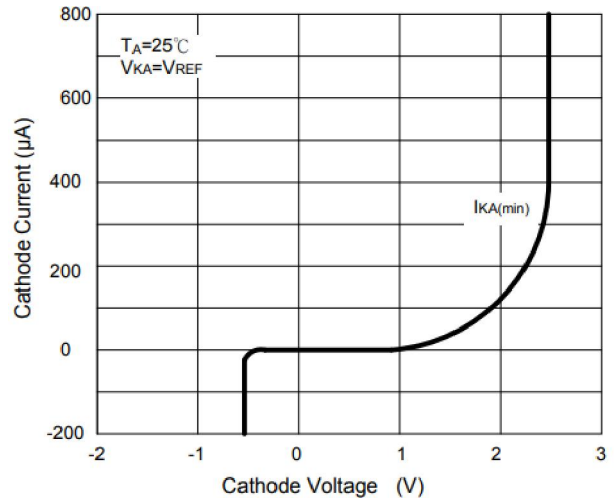


Figure 2. Cathode Current vs. Cathode Voltage

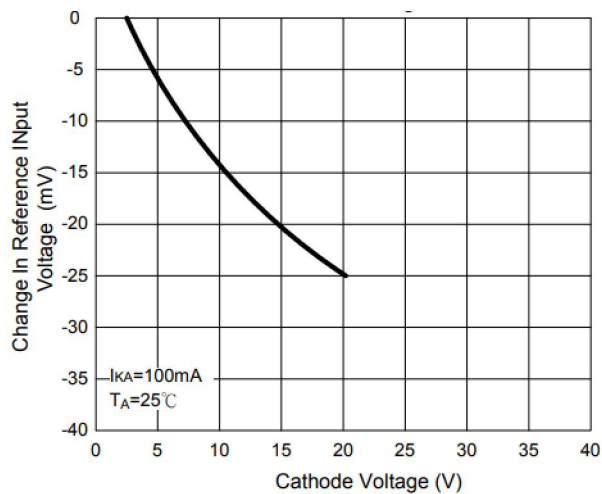


Figure 3. Change In Reference Input Voltage vs. Cathode Voltage

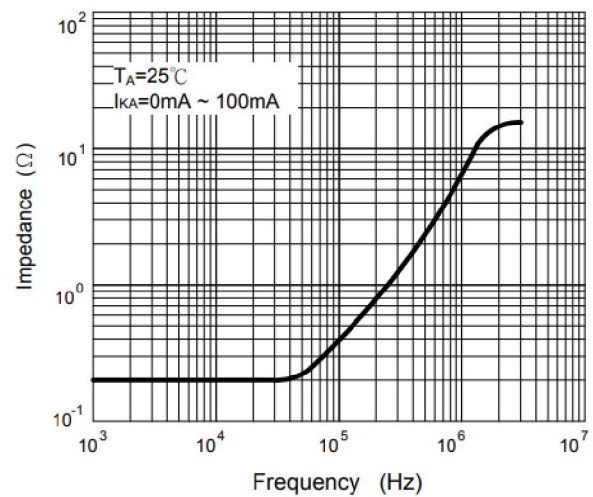


Figure 4. Dynamic Impedance Frequency

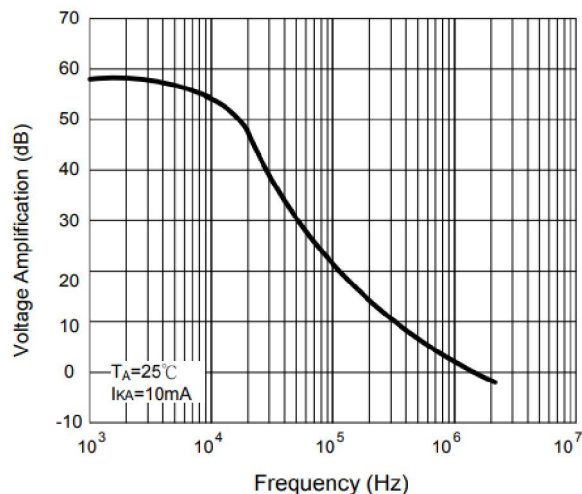


Figure 5. Small Signal Voltage Amplification vs. Frequency

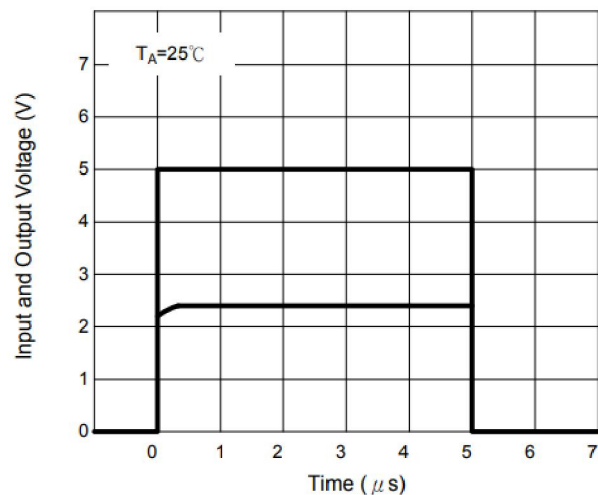


Figure 6. Pulse Response

Package Dimensions

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	0.00	0.10	0.000	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.08	0.15	0.003	0.006
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.90	1.00	0.035	0.039
e1	1.80	2.00	0.071	0.079
L	0.50	0.60	0.020	0.024
L1	0.30	0.50	0.012	0.020

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。