

# IN1630-AGC

## Wide Range Synchronous Buck Converter

### Features

- ◇ Wide Input Voltage Range: 8V to 60V
- ◇ Adjustable Output Voltage
- ◇ 300 $\mu$ A Shutdown Current
- ◇ Programmable switching frequency
- ◇ Programmable current limit
- ◇ Up to 95% Efficiency
- ◇ Short-Circuit Protection
- ◇ Thermal Shutdown
- ◇ Available in SOP-14 Package

### Applications

- ◇ Automotive Systems
- ◇ Industrial Automation and Motor Control
- ◇ Electric vehicles
- ◇ Energy Storage System Management in the domain of alternative energy
- ◇ Intelligent Devices and Robots
- ◇ Constant power
- ◇ Solar electric equipment

### Description

The IN1630-AGC is a synchronous step down regulator, operating with a wide input voltage range from 8V to 60V. The IN1630-AGC can achieve maximum 3.5A continuous output current with excellent load and line regulation. The switching frequency is adjustable according to the resistor value and the synchronous architecture provides for a highly efficient design. Current mode operation provides fast transient response and eases loop stabilization.

The IN1630-AGC integrates soft-start and over-temperature protection circuits, output short-circuit protection, current limit protection and other functions to improve system reliability. The IN1630-AGC requires a minimum number of readily available standard external components. The IN1630-AGC converter is available in the industry standard SOP-14 package.

### Typical Application Circuit


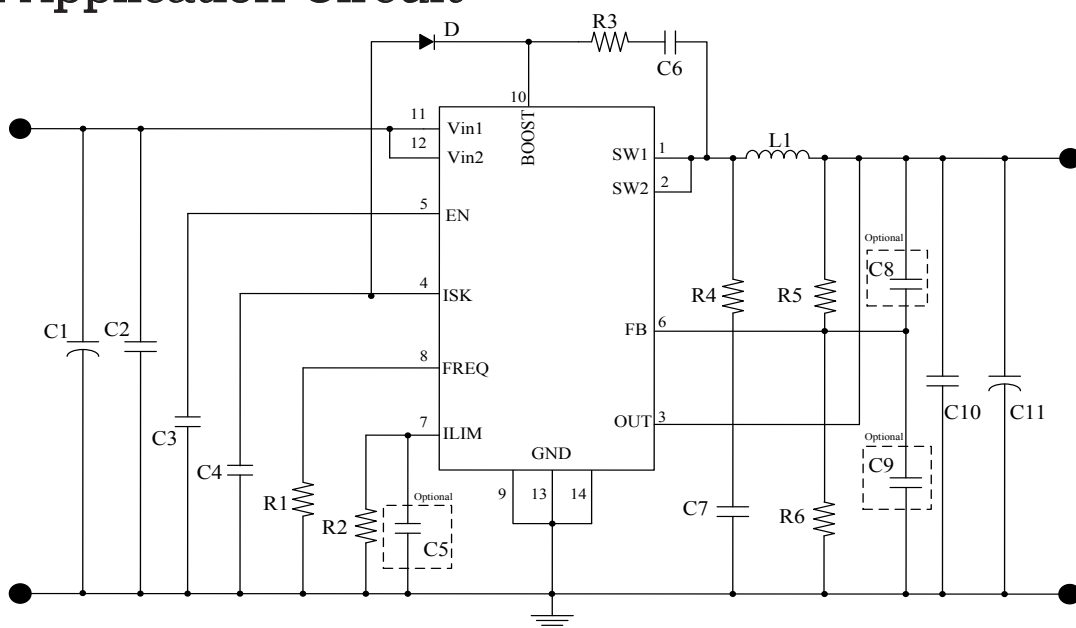


Figure 1, 8V- 60V, Synchronous Buck Converter

#### NOTE:

- 1.The typical application circuits and parameters are for reference only. Actual application circuit parameters should be set based on actual measurements. For mass production and modifications, please communicate with the original manufacturer.
- 2.Adjust the input electrolytic capacitor and resistor according to the actual operating voltage.

Pin Configuration

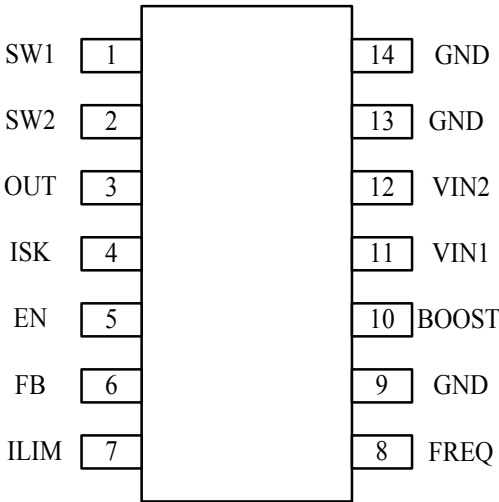

Absolute Maximum Ratings

Over operating free-air temperature unless otherwise noted <sup>(1)</sup>.

DESCRIPTION	MIN	MAX	UNIT
VIN, EN	-0.3	65	V
BOOST	-0.3	72	V
SW	-1	65	V
ISK	-0.3	12	V
BOOST-SW	-0.3	12	V
ILIM, FREQ	-0.3	6	V
Operating junction temperature TJ <sup>(2)</sup>			
	-40	120	°C
Storage temperature TSTG			
	-65	150	°C

- (1) Stresses beyond those listed under Absolute Maximum Rating may cause device permanent damage. These are stress ratings only and functional operation of the devices at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.
- (2) The IC includes over temperature protection to protect the device during overload conditions. Junction temperature will exceed 120 °C when over temperature protection is active. Continuous operation above the specified maximum operating above the specified maximum operating junction temperature will reduce

Pin Configuration

NAME	NO.	PIN FUNCTION
SW	1,2	Regulator switching output. Connect SW to an external power inductor.
OUT	3	Output voltage pin.
ISK	4	Internal LDO output.
EN	5	EN Control Input. The external applied voltage need to be above 4.25V to enable the chip. The voltage need to be below 0.3V to disable the chip. When the EN pin connected with a capacitor, the EN pin voltage ranges from 4 - 5V under normal working condition.
FB	6	Feedback Pin. Receive the feedback voltage from an external resistor divider across the output. . The Output voltage is set by R5 and R6: $V_{OUT} = V_{REF} \cdot [1 + (R5/R6)]$ .
ILIM	7	Tie an external resistor between this pin and ground to set max output current. The maximum output current is set by R <sub>LM</sub> : $R_{LM} (k\Omega) = 32.5 \cdot I_{MAX} (A)$ .
FREQ	8	Tie an external resistor between this pin and ground to set the operation frequency. The frequency is set by R1: $R1(k\Omega) = 20900 / f_{osc} (kHz)$ .
GND	9, 13,14	Ground pin.
BOOST	10	Bootstrap pin. Bootstrap capacitor is charged when SW voltage is low.
VIN	11,12	Main power supply Pin. Connect a local bypass capacitor from VIN pin to GND pin. Path from VIN pin to high frequency bypass capacitor and GND must be as short as possible.

Recommended Operating Condition

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT
V <sub>IN</sub>	Input Voltage Range	8		60	V
V <sub>OUT</sub>	Adjustable Output Voltage Range	4.5		15	V
T <sub>J</sub>	Operating junction Temperature	-40		120	°C
T	Storage Temperature Range	-65		+150	°C

Recommended Component Selection

Part Reference	C1	C2	C3	C4	C6	C7	C10	C11
Value	100μF	1μF	0.22μF	1μF	0.1μF	470PF	0.1μF	470μF
Part Reference	R1	R2	R3	R4	R5	R6	D	L
Value	120K	115K	20R	5R1	100K	11K	4148	47μH

Electrical Characteristics

Operating Conditions: T<sub>A</sub>=25 °C, C<sub>IN</sub>=100μF, C<sub>OUT</sub>=470μF, L=47μH, unless otherwise noted.

SYMBOL	PARAMETER	CONDITION	MIN	TYP	MAX	UNIT
V <sub>IN</sub>	Input Voltage Range		8		60	V
V <sub>ISK</sub>	Internal LDO Output Voltage Range		5		11	V
V <sub>FB</sub>	Regulated Voltage Range		1.17	1.2	1.23	V
V <sub>IN_UVLO</sub>	Input UVLO Threshold	V <sub>IN</sub> Rising		5.5		V
I <sub>SHUD</sub>	Shutdown Current	EN = 0 V		0.3		mA
I <sub>Q</sub>	Quiescent Current	V <sub>IN</sub> =24V, R <sub>LIM</sub> = 130K, I <sub>OUT</sub> = 0A		1.52		mA
I <sub>LIM</sub>	Limit Current	R <sub>LIM</sub> =115K		3.8		A
V <sub>ripple</sub>	Output Ripple	V <sub>IN</sub> =30V, V <sub>OUT</sub> = 12V, I <sub>OUT</sub> = 2.5A		200		mV
R <sub>DS(on)-H</sub>	High-side MOSFET on-resistance	V <sub>BST</sub> - V <sub>SW</sub> =10 V		68		mΩ
R <sub>DS(on)-L</sub>	Low-side MOSFET on-resistance	V <sub>BST</sub> - V <sub>SW</sub> =10 V		24		mΩ
EFFI	Efficiency	V <sub>IN</sub> =20V, V <sub>OUT</sub> = 12V, I <sub>OUT</sub> = 2.5A		96.6		%
F <sub>OSC</sub>	Switching Frequency	8V < V <sub>IN</sub> < 95V, I <sub>OUT</sub> < 1.5A		80		KHz
T <sub>S</sub>	Storage Temperature Range		-40		125	°C
T <sub>SD</sub>	Thermal Shutdown Temperature			160		°C

## Typical Characteristics

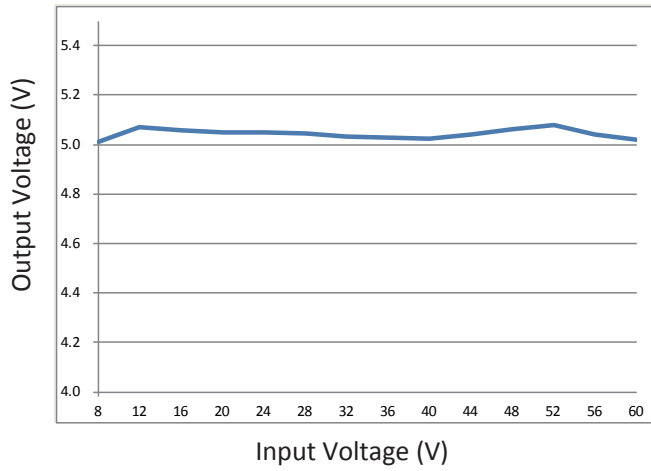


Figure 2, Input Voltage vs. Output Voltage,  $V_{OUT}=5V$

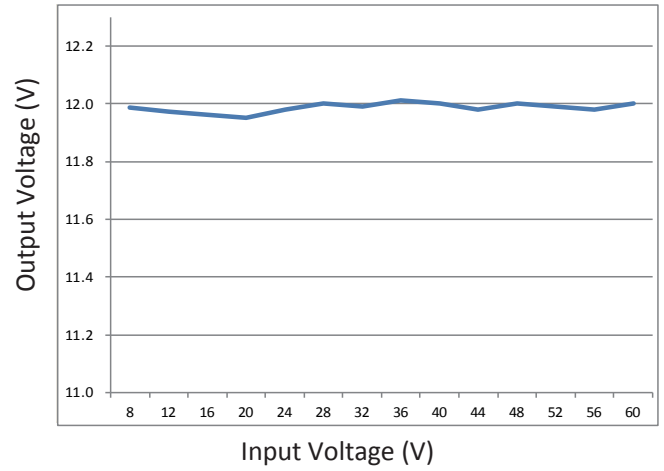


Figure 3, Input Voltage vs. Output Voltage,  $V_{OUT}=12V$

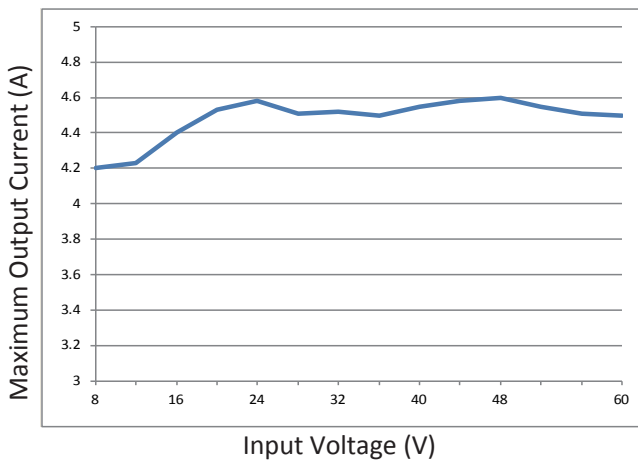


Figure 4, Input Voltage vs. Maximum Output Current,  $V_{OUT}=5V$ ,  $R_{lim}=130k$

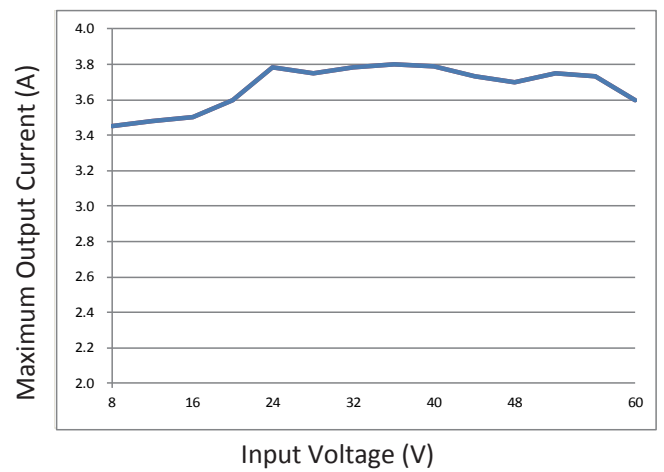


Figure 5, Input Voltage vs. Maximum Output Current,  $V_{OUT}=12V$ ,  $R_{lim}=130k$

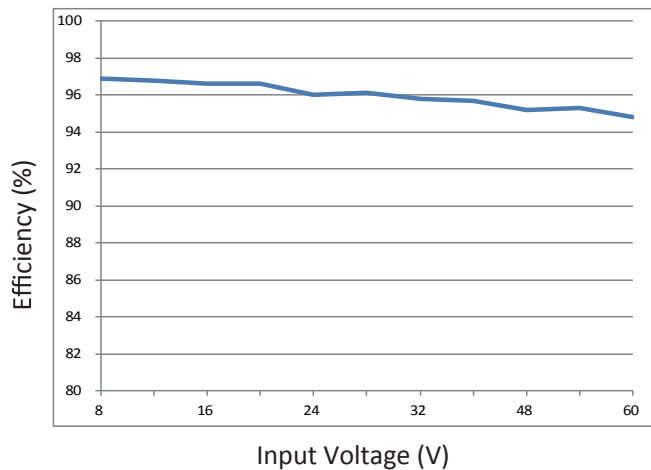


Figure 6, Input Voltage vs. Efficiency,  $V_{OUT}=12V$ ,  $I_{OUT}=2.5A$



## Application Waveforms

$V_{in}=30V$ ,  $V_{out}=12V$ , unless otherwise noted.



Figure 7, SW Switching &  $V_{out}$  Ripple Waveform ( $I_{load}=0A$ )

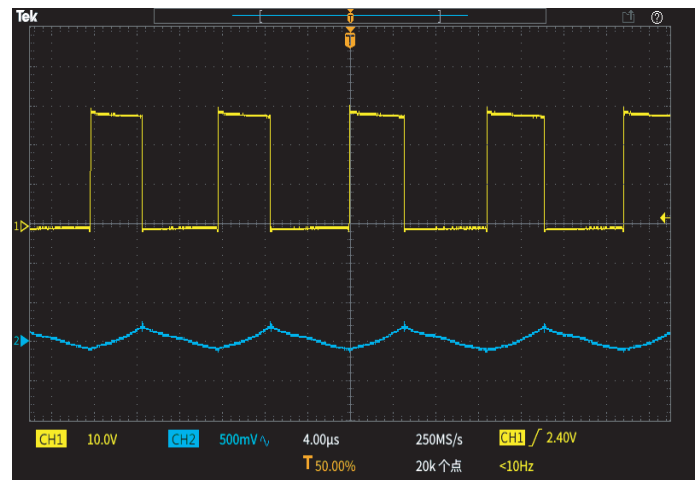


Figure 8, SW Switching &  $V_{out}$  Ripple Waveform ( $I_{load}=2.5A$ )

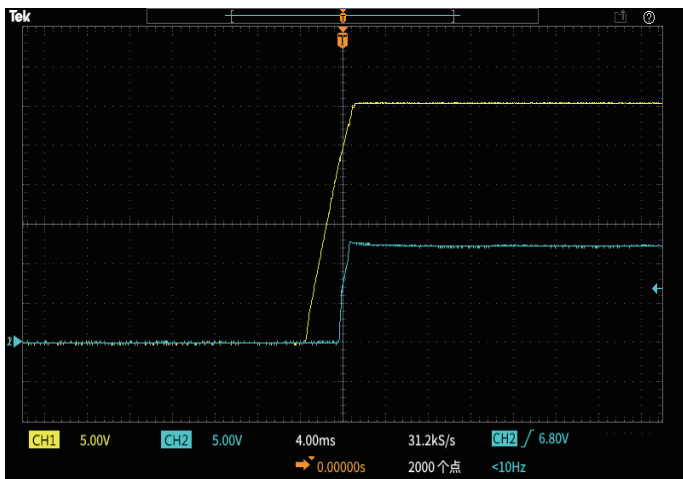


Figure 9, Power up ( $I_{load}=0A$ )

The yellow line represents  $V_{IN}$ , the blue line represents  $V_{OUT}$

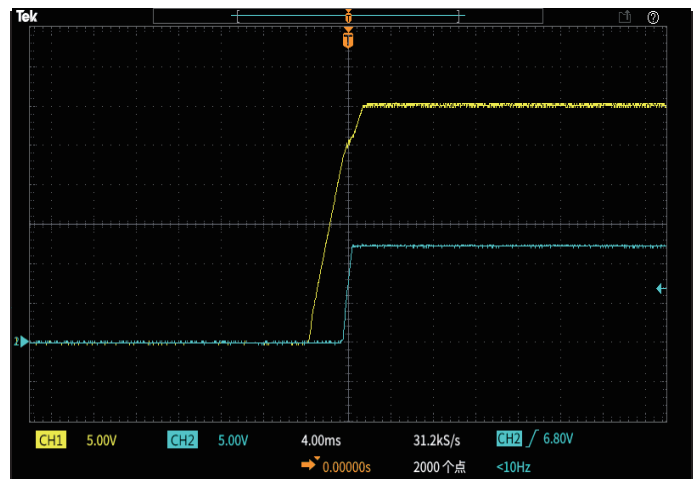


Figure 10, Power up ( $I_{load}=2.5A$ )

The yellow line represents  $V_{IN}$ , the blue line represents  $V_{OUT}$

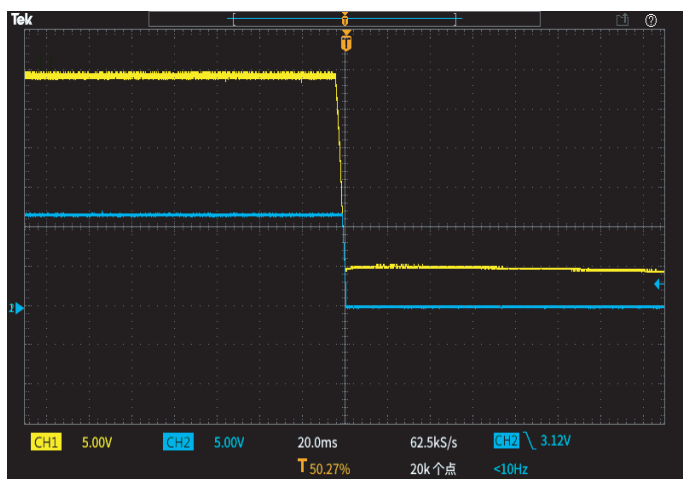


Figure 11, Power down ( $I_{load}=2.5A$ )

The yellow line represents  $V_{IN}$ , the blue line represents  $V_{OUT}$

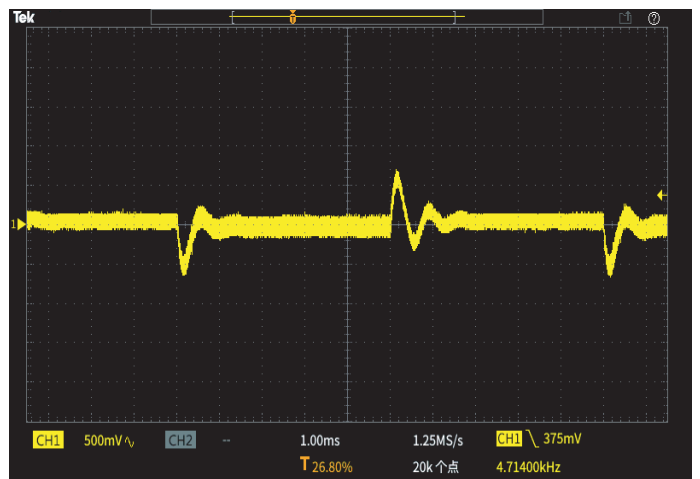


Figure 12, Load Transient (1.25A - 2.5A)


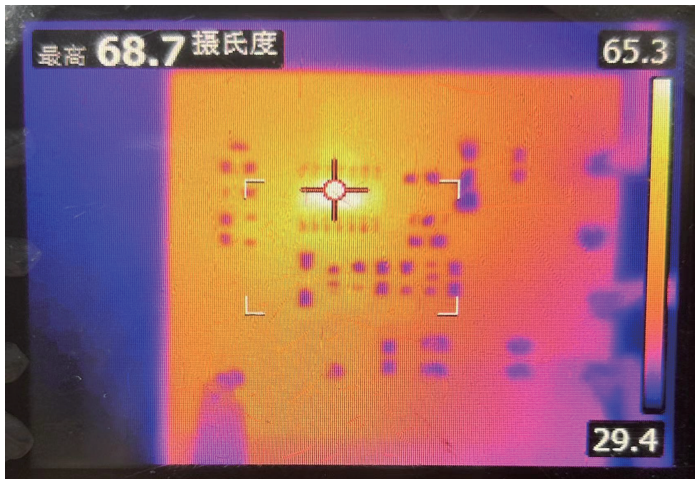


Figure 13, Thermal, 30V<sub>in</sub>, 12V<sub>out</sub>, I<sub>load</sub>=2.5A

Functional Block Diagram

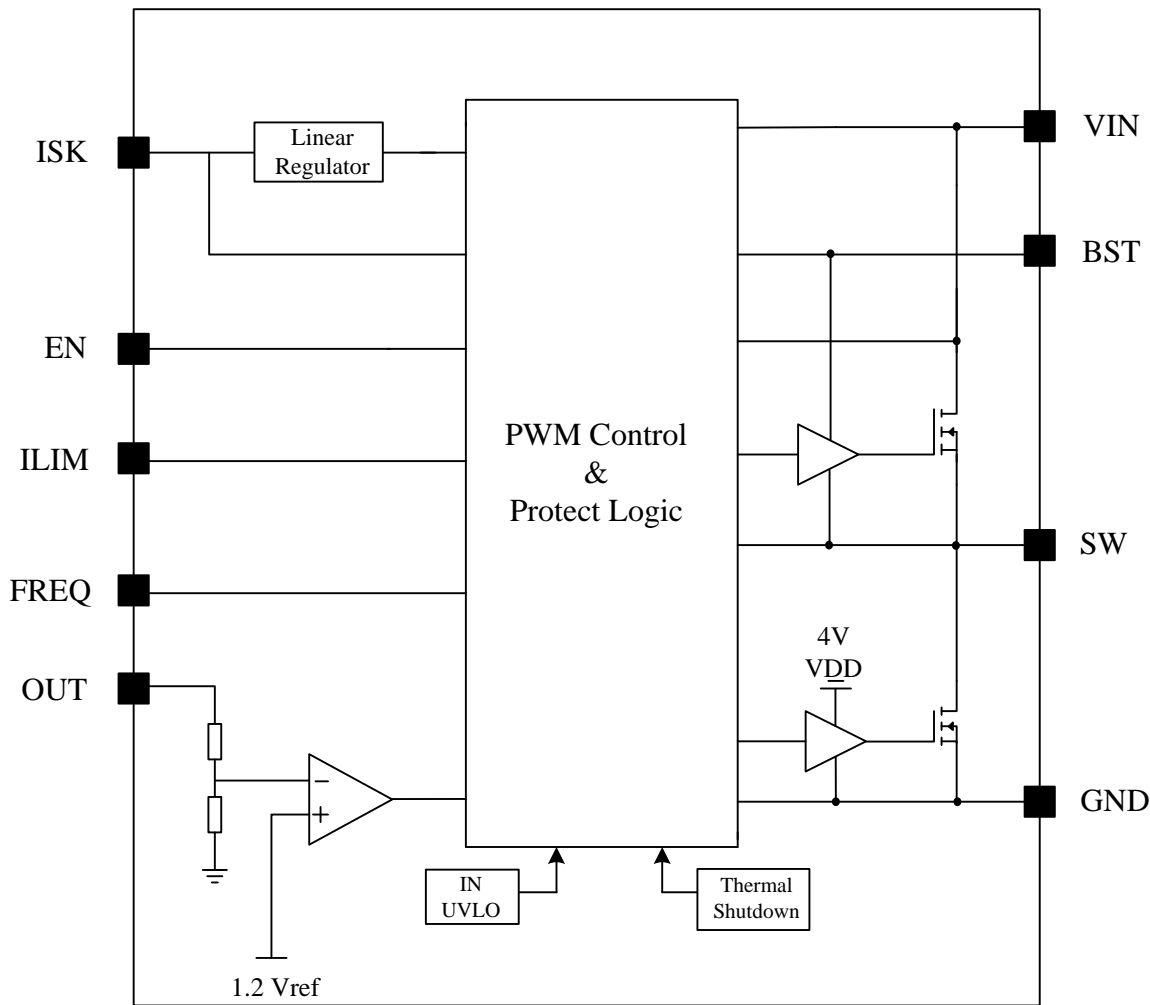

## Application Information

### Thermal Protection

The total power dissipation in IN1630-AGC is limited by a thermal protection circuit. When the device temperature rises to approximately 160 °C, this circuit turns off the output, allowing the IC to cool. The thermal protection circuit can protect the device from being damaged by overheating in the event of fault conditions. Continuously running the IN1630-AGC into thermal shutdown degrades device reliability.

### Current Limit

The current limit value is defined by  $R_{LIM}$ . The inductor Current is limited cycle by cycle defined the formula. For example, the peak current limit value is 2.1A by the  $R_{LIM}=200k$ . The current limit value rises when the set resistor  $R_{LIM}$  rises. The maximum output current is set by  $R_{LIM}$ :  $R_{LIM}(k\Omega)=100 \bullet I_{MAX}(A)$ .

### Inductor Selection

For most applications, the value of the inductor will fall in the range of 47μH to 100μH. Its value is chosen based on the desired ripple current. Large value inductors lower ripple current and small value inductors result in higher ripple currents. Higher  $V_{IN}$  or  $V_{OUT}$  also increases the ripple current as shown in equation. A reasonable starting point for setting ripple current is  $\Delta I_L=0.6A$  (40% of 1.5A).

$$\Delta L = \frac{1}{(f)(L)} V_{OUT} \left(1 - \frac{V_{OUT}}{V_{IN}}\right)$$

The DC current rating of the inductor should be at least equal to the maximum load current plus half the ripple current to prevent core saturation. Thus, a 2.1A rated inductor should be enough for most applications (1.5A +0.6A). For better efficiency, choose a low DC-resistance inductor.

Different core materials and shapes will change the size/current and price/current relationship of an inductor. Toroid or shielded pot cores in ferrite or perm alloy materials are small and don't radiate much energy, but generally cost more than powdered iron core inductors with similar electrical characteristics. The choice of which style inductor to use often depends more on the price vs. size requirements and any radiated field/EMI requirements than on what the IN1630-AGC requires to operate.

### Output and Input Capacitor Selection

In continuous mode, the source current of the top MOSFET is a square wave of duty cycle  $V_{OUT}/V_{IN}$ . To prevent large voltage transients, a low ESR input capacitor sized for the maximum RMS current must be used. The maximum RMS capacitor current is given by:

$$C_{IN} \text{required } I_{RMS} = I_{QMAX} \frac{[V_{OUT}(V_{IN} - V_{OUT})]^{\frac{1}{2}}}{V_{IN}}$$

This formula has a maximum at  $V_{IN} = 2V_{OUT}$ , where  $I_{RMS} = I_{OUT}/2$ . This simple worst-case condition is commonly used for design because even significant deviations do not offer much relief. Note that the capacitor manufacturer's ripple current ratings are often based on 2000 hours of life. This makes it advisable to further derate the capacitor, or choose a capacitor rated at a higher temperature than required. Always consult the manufacturer if there is any question.

The selection of  $C_{OUT}$  is driven by the required effective series resistance (ESR). Typically, once the ESR requirement for  $C_{OUT}$  has been met, the RMS current rating generally far exceeds the  $I_{RIPPLE}(P-P)$  requirement. The output ripple  $\Delta V_{OUT}$  is determined by:

$$\Delta V_{OUT} = \Delta I_L \left( ESR + \frac{1}{8fC_{OUT}} \right)$$

Where  $f$  = operating frequency,  $C_{OUT}$  = output capacitance and  $\Delta I_L$  = ripple current in the inductor. For a fixed output voltage, the output ripple is highest at maximum input voltage since  $\Delta I_L$  increases with input voltage.

Aluminum electrolytic and dry tantalum capacitors are both available in surface mount configurations. In the case of tantalum, it is critical that the capacitors are surge tested for use in switching power supplies. An excellent choice is the AVX TPS series of surface mount tantalum. These are specially constructed and tested for low ESR so they give the lowest ESR for a given volume.

### Efficiency Considerations

The efficiency of a switching regulator is equal to the output power divided by the input power times 100%. It is often useful to analyze individual losses to determine what is limiting the efficiency and which change would produce the most improvement. Efficiency can be expressed as:  $\text{Efficiency} = 100\% - (L_1 + L_2 + L_3 + \dots)$  where  $L_1$ ,  $L_2$ , etc. are the individual losses as a percentage of input power. Although all dissipative elements in the circuit produce losses, two main sources usually account for most of the losses:  $V_{IN}$  quiescent current and  $I^2R$  losses. The  $V_{IN}$  quiescent current loss dominates the efficiency loss at very low load currents whereas the  $I^2R$  loss dominates the efficiency loss at medium to high load currents. In a typical efficiency plot, the efficiency curve at very low load currents can be misleading since the actual power lost is of no consequence.

The  $V_{IN}$  quiescent current is due to two components: the DC bias current as given in the electrical characteristics and the internal main switch and synchronous switch gate charge currents. The gate charge current results from switching the gate capacitance of the internal power MOSFET switches. Each time the gate is switched from high to low to high again, a packet of charge  $\Delta Q$  moves from  $V_{IN}$  to ground. The resulting  $\Delta Q/\Delta t$  is the current out of  $V_{IN}$  that is typically larger than the DC bias current. In continuous mode,  $I_{GATECHG} = f(Q_T + Q_B)$  where  $Q_T$  and  $Q_B$  are the gate charges of the internal top and bottom switches. Both the DC bias and gate charge losses are proportional to  $V_{IN}$  and thus their effects will be more pronounced at higher supply voltages.

$I^2R$  losses are calculated from the resistances of the internal switches,  $R_{SW}$  and external inductor  $R_L$ . In continuous mode the average output current flowing through inductor  $L$  is "chopped" between the main switch and the synchronous switch. Thus, the series resistance looking into the SW pin is a function of both top and bottom MOSFET  $R_{DS(ON)}$  and the duty cycle (DC) as follows:  $R_{SW} = R_{DS(ON)TOP} \times DC + R_{DS(ON)BOT} \times (1-DC)$  The  $R_{DS(ON)}$  for both the top and bottom MOSFETs can be obtained from the Typical Performance Characteristics curves. Thus, to obtain  $I^2R$  losses, simply add  $R_{SW}$  to  $R_L$  and multiply the result by the square of the average output current. Other losses including  $C_{IN}$  and  $C_{OUT}$  ESR dissipative losses and inductor core losses generally account for less than 2% of the total loss.

### Board Layout Suggestions

When laying out the printed circuit board, the following checklist should be used to ensure proper operation of the IN1630-AGC. Check the following in your layout.

The power traces, consisting of the GND trace, the SW trace and the  $V_{IN}$  trace should be kept short, direct and wide.


Put the input capacitor as close as possible to the device pins ( $V_{IN}$  and GND).

SW node is with high frequency voltage swing and should be kept small area. Keep analog components away from SW node to prevent stray capacitive noise pick-up.

Connect all analog grounds to a command node and then connect the command node to the power ground behind the output capacitors.

Packing Information

SOP-14L Package Outline Dimension:

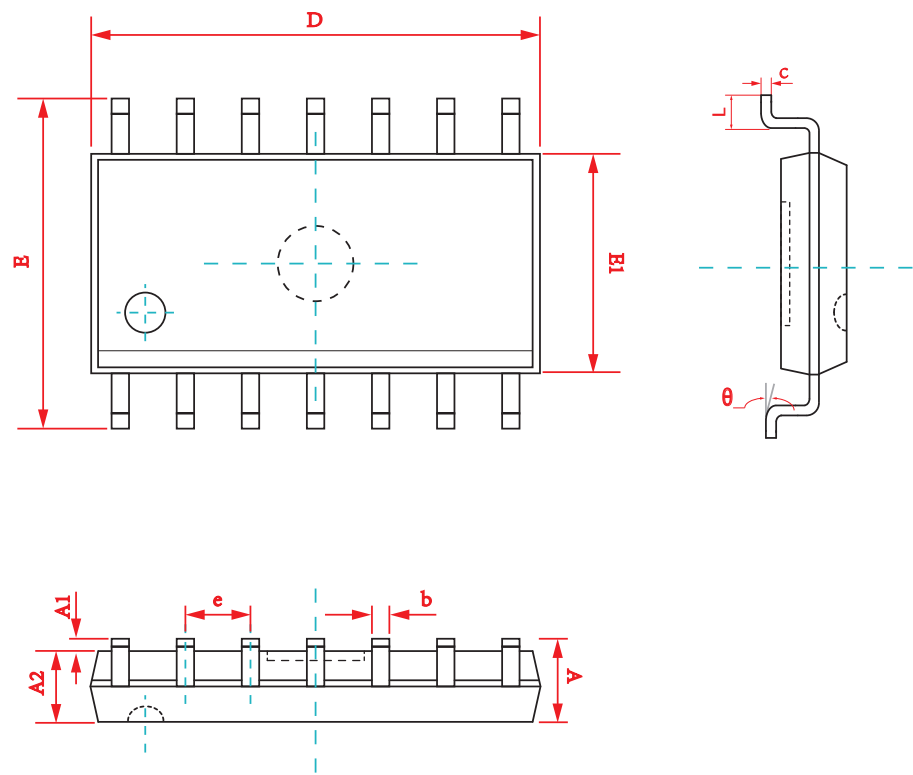

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	—	1.750	—	0.069
A1	0.100	0.250	0.004	0.010
A2	1.250	—	0.049	—
B	0.310	0.510	0.012	0.020
C	0.100	0.250	0.004	0.010
D	8.450	8.850	0.333	0.348
E	5.800	6.200	0.228	0.244
E1	3.800	4.000	0.150	0.157
e	1.270(BSC)		0.050(BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

## IMPORTANT NOTICE AND DISCLAIMER

INOVICES PROVIDES RELIABILITY DATA (INCLUDING DATA SHEETS), APPLICATION OR OTHER DESIGN ADVICE, SAFETY INFORMATION, AND OTHER RESOURCES "AS IF" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

### RIGHT TO MAKE CHANGES

Inovices reserves the right to make corrections, modifications, enhancements, improvements and other changes to its products and services at any time and to discontinue any product or service without notice.

### WARRANTY INFORMATION

Inovices warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with its standard warranty. Testing and other quality control techniques are used to the extent it deems necessary to support this warranty. Hexin assumes no liability for application assistance or customer product design. To minimize the risk associated with customer products and applications, customer should provide adequate and operating safeguards.

### LIFE SUPPORT

Inovices's products are not designed to be used as components in devices intended to be used as components in devices intended to support or sustain human life. Inovices will not be held liable for any damages or claim resulting from the use of its products in medical applications.

### MILITARY

Inovices's products are not designed for use in military applications. Inovices will not be held liable for any damages or claims resulting from the use of its products in military applications.