
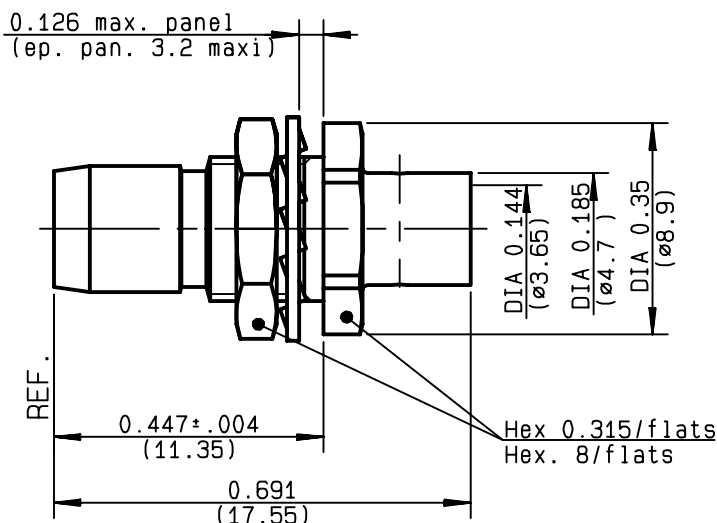


STRAIGHT BULKHEAD PLUG SOLDER TYPE
CABLE .141 - PACK.100
R128.055.827
SERIES BMA COM


PERCAGE PANNEAU

MOUNTING HOLE



	MM		INCH	
	maxi	mini	maxi	mini
A	6.175	6.15	0.243	0.242

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-22	GHz
TEMPERATURE RATING	-65/+125	$^{\circ}\text{C}$
V.S.W.R	1.05 + .01 x F(GHz)Maxi	
RF INSERTION LOSS	0.03	$\sqrt{F}(\text{GHz})$ dB Maxi
VOLTAGE RATING	350	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	1000	Veff Mini
INSULATION RESISTANCE	5000	M Ω Mini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT	2.65	gr
SPECIFICATION		

 CABLES : **KS 2**
RG 402

OTHERS CHARACTERISTICS

CABLE RETENTION	272	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	18	N Mini
Axial force - opposite end	18	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	150	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS	MATERIALS	FINISH	(all values are given) in micrometers
BODY	BRASS	BBR 2	
OUTER CONTACT			
CENTER CONTACT	BRONZE	GOLD 1.3 OVER COPPER 2	
INSULATOR	PTFE	-	
GASKET		-	
OTHERS PIECES	BRASS	BBR 2	

BAFFERT

 ISSUE
9926A01

 CREATION DATE
30/09/1996

 FILE PART-NUMBER
EPC96-06

RADIALL®

 The information given here is subject to change without notice.
 Design changes may be in order to improve the product .

Connect to the future


**R128.055.827**

ISSUE 9926A01

SERIES

BMA COM

CONNECTOR BODY



We recommend a thermal preconditioning cable .

①


Strip the cable .

Stripping tool R282 053 000

Positioner R282 066 000

-

-



Stripping	a	b	c	d	e
inch	0.085	0	0	0	0
mm	2.16				


②

Trim cable center conductor .

Trimmer R282 066 000

-

-

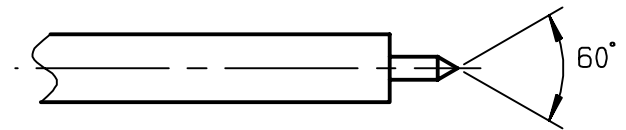

③

Slide cable into connector body until it contacts the body shoulder.

Place sub assembly into the assembly jig R282 740 000 (or equivalent) with positioner R282 860 100 and tighten it .

Solder body onto cable .

Let the assembly cool down before removing it from the jig .

Clean the solder area.

