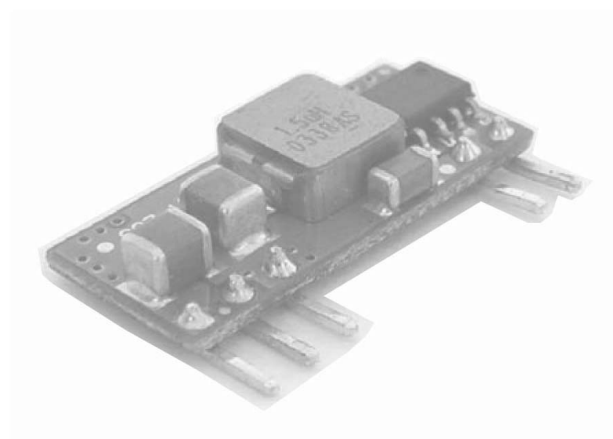


**SERIES:** VPOL5A-5-SIP | **DESCRIPTION:** POINT OF LOAD CONVERTER


**FEATURES**

- high efficiency topology, typically 94% at 3.3 Vdc
- industry standard footprint
- operating temperature range (-40~85°C)
- cost efficient open frame design
- programmable output voltage via external resistor from 0.75 to 3.63 Vdc
- no minimum load requirement (stable at all loads)
- remote on/off
- remote sense compensation
- fixed switching frequency
- continuous short-circuit protection and over current protection
- over-temperature protection (OTP)
- monotonic startup with pre-bias at the output
- UL/IEC/ EN 60950-1 (E222736) certified


**MODEL**

| MODEL        | input voltage |                | output voltage<br>(Vdc) | output current<br>max<br>(A) | output power<br>max<br>(W) | ripple and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br><br>typ (%) |
|--------------|---------------|----------------|-------------------------|------------------------------|----------------------------|-------------------------------------------------|---------------------------|
|              | typ<br>(Vdc)  | range<br>(Vdc) |                         |                              |                            |                                                 |                           |
| VPOL5A-5-SIP | 5             | 3.0~5.5        | 0.75                    | 5                            | 3.75                       | 50                                              | 79                        |
|              |               | 3.0~5.5        | 1.2                     |                              | 6.0                        |                                                 | 85                        |
|              |               | 3.0~5.5        | 1.5                     |                              | 7.5                        |                                                 | 87                        |
|              |               | 3.0~5.5        | 1.8                     |                              | 9.0                        |                                                 | 89                        |
|              |               | 3.0~5.5        | 2.0                     |                              | 10.0                       |                                                 | 90                        |
|              |               | 3.0~5.5        | 2.5                     |                              | 12.5                       |                                                 | 92                        |
|              |               | 4.5~5.5        | 3.3                     |                              | 16.5                       |                                                 | 94                        |

Notes: 1. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1  $\mu$ F ceramic and 10  $\mu$ F electrolytic capacitors on the output.

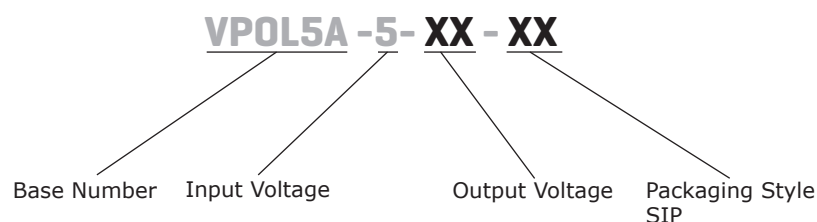**PART NUMBER KEY**


## INPUT

| parameter                      | conditions/description              | min | typ | max | units            |
|--------------------------------|-------------------------------------|-----|-----|-----|------------------|
| operating input voltage        | $V_{out} < V_{in} - 0.5 V_{dc}$     |     |     | 5.8 | Vdc              |
| input under-voltage lockout    | turn-on voltage treshold            |     | 2.0 |     | Vdc              |
|                                | turn-off voltage treshold           |     | 1.9 |     | Vdc              |
|                                | lockout hysteresis voltage          |     | 0.1 |     | Vdc              |
| input current                  | 0~0.5 Vdc                           |     |     | 5   | A                |
| no load input current          | 0.75 output                         |     | 25  |     | mA               |
|                                | 1.2 output                          |     | 30  |     | mA               |
|                                | 1.5 output                          |     | 30  |     | mA               |
|                                | 1.8 output                          |     | 35  |     | mA               |
|                                | 2.0 output                          |     | 35  |     | mA               |
|                                | 2.5 output                          |     | 35  |     | mA               |
|                                | 3.3 output                          |     | 35  |     | mA               |
| off converter input current    | shutdown input idle current         |     |     | 10  | mA               |
| inrush current                 |                                     |     |     | 0.1 | A <sup>2</sup> s |
| input reflected-ripple current | P-P thru 1μH inductor, 5Hz to 20MHz |     | 150 |     | mA               |

## OUTPUT

| parameter                    | conditions/description                                           | min  | typ   | max   | units |
|------------------------------|------------------------------------------------------------------|------|-------|-------|-------|
| capacitive load              | low ESR                                                          |      |       | 3,000 | μF    |
| output voltage set point     | at nominal input                                                 |      | ±1.5  |       | %     |
| trim adjustment range        | selected by an external resistor                                 | 0.75 |       | 3.63  | Vdc   |
| line regulation              | input voltage range                                              |      | ±0.4  |       | %     |
| load regulation              | 10~100% load                                                     |      | ±0.5  |       | %     |
| operating current range      |                                                                  | 0    |       | 5     | A     |
| transient response deviation | 25% load step change                                             |      |       | 200   | mV    |
| switching frequency          |                                                                  |      | 300   |       | kHz   |
| remote on/off                | logic low (module off) or open circuit<br>logic high (module on) | 0    |       | 0.4   | Vdc   |
| leakage current              |                                                                  |      |       | 1     | mA    |
| start-up time                |                                                                  |      |       | 2     | ms    |
| rise time                    |                                                                  |      |       | 4.5   | ms    |
| temperature coefficient      | -40~85°C                                                         |      | ±0.03 |       | %/°C  |

## PROTECTIONS

| parameter                   | conditions/description            | min | typ | max | units |
|-----------------------------|-----------------------------------|-----|-----|-----|-------|
| short circuit protection    | auto recovery, continuous, hiccup |     |     |     |       |
| over temperature protection |                                   |     | 120 |     | °C    |


## SAFETY AND COMPLIANCE

| parameter        | conditions/description      | min       | typ | max | units |
|------------------|-----------------------------|-----------|-----|-----|-------|
| safety approvals | 60950-1: UL/IEC/EN          |           |     |     |       |
| MTBF             | as per MIL-HDBK-217F @ 25°C | 1,500,000 |     |     | hours |
| RoHS             | yes                         |           |     |     |       |

## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | -40 |     | 85  | °C    |
| storage temperature   |                        | -55 |     | 125 | °C    |

## DERATING CURVE

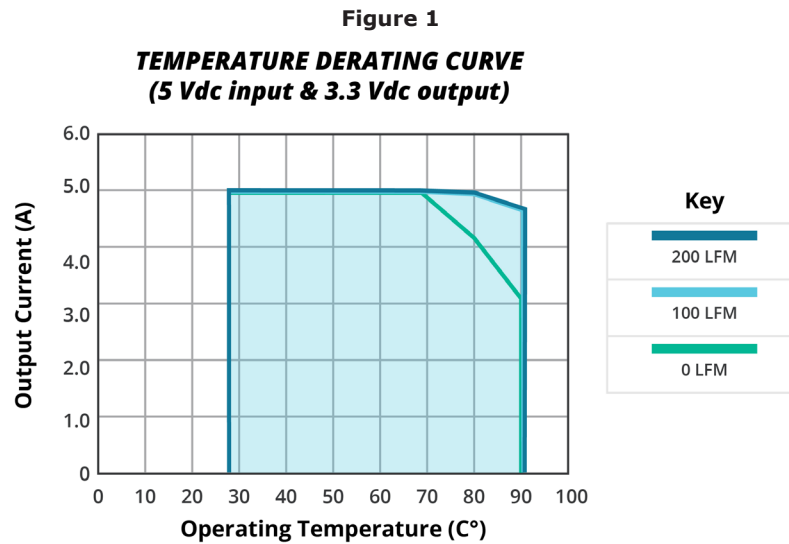


MECHANICAL

| parameter  | conditions/description                      | min | typ | max | units |
|------------|---------------------------------------------|-----|-----|-----|-------|
| dimensions | 22.9 x 10.16 x 5.6 (0.9 x 0.4 x 0.220 inch) |     |     |     | mm    |
| weight     |                                             |     | 2.3 |     | g     |

MECHANICAL DRAWING


units: inches [mm]  
tolerance: x.xx ±0.02 [±0.5], x.xxx ±0.010 [0.25]

| PIN CONNECTIONS |          |
|-----------------|----------|
| Pin             | Function |
| 1               | +Vo      |
| 2               | Trim     |
| 3               | Common   |
| 4               | +Vin     |
| 5               | REM      |

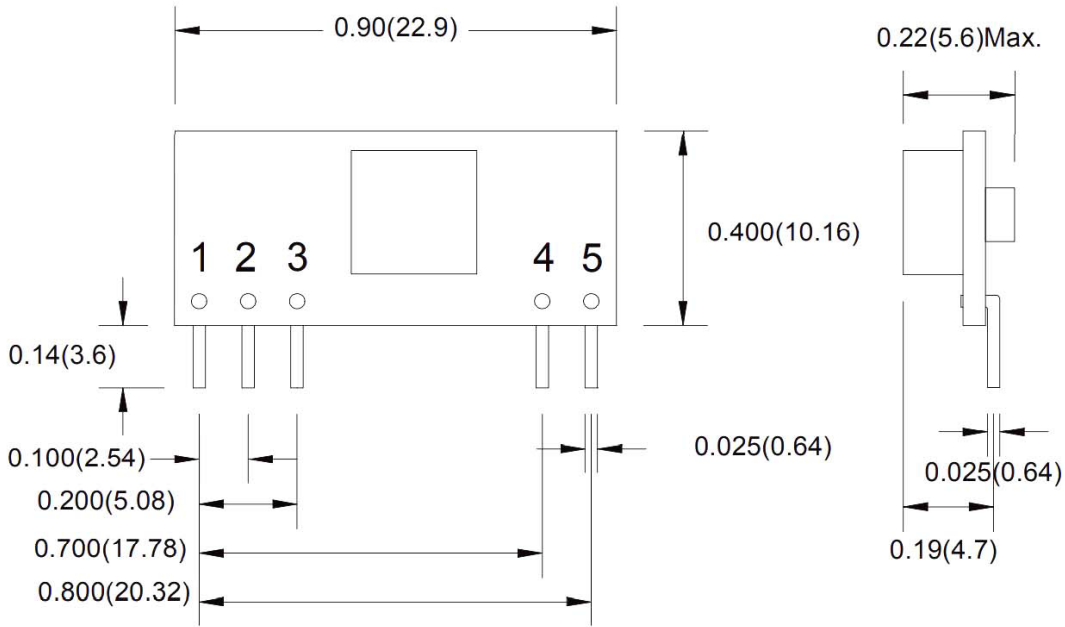


## EFFICIENCY CURVES


**EFFICIENCY VS OUTPUT CURRENT**  
**VPOL5A-5-SIP**  
**( $V_o = 3.3$  Vdc)**

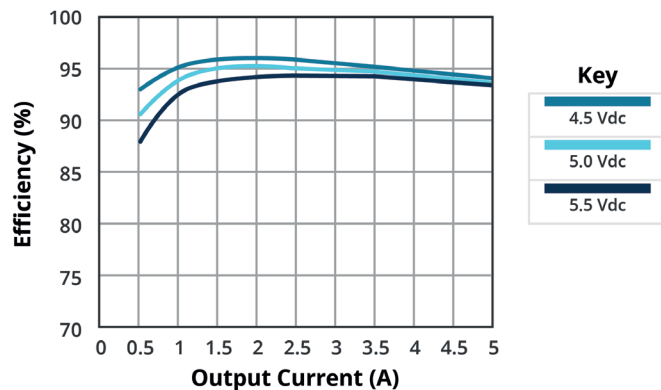


**EFFICIENCY VS OUTPUT CURRENT**  
**VPOL5A-5-SIP**  
**( $V_o = 2.5$  Vdc)**

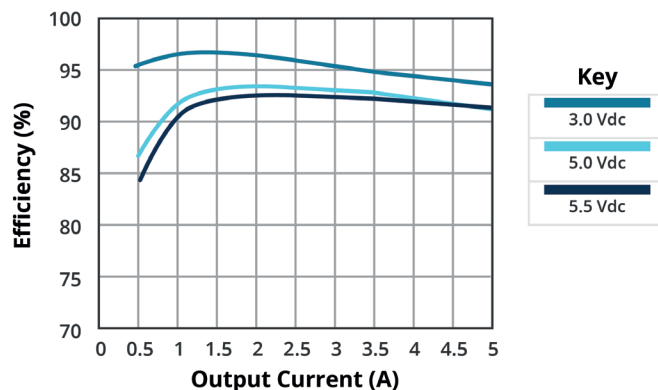


**EFFICIENCY VS OUTPUT CURRENT**  
**VPOL5A-5-SIP**  
**( $V_o = 1.8$  Vdc)**

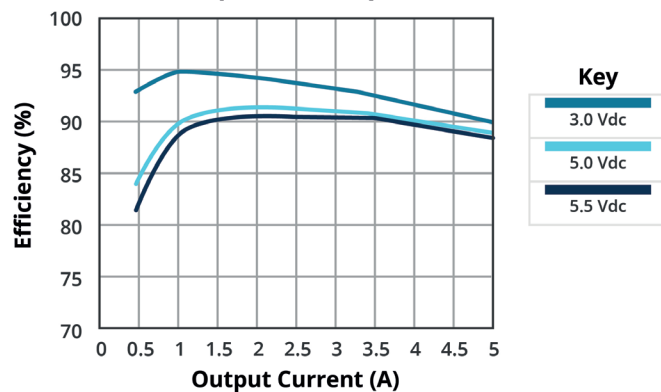


**EFFICIENCY VS OUTPUT CURRENT**  
**VPOL5A-5-SIP**  
**( $V_o = 1.5$  Vdc)**

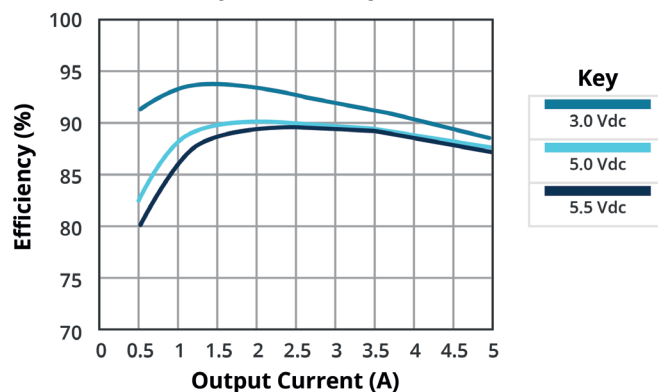

**EFFICIENCY VS OUTPUT CURRENT**  
**VPOL5A-5-SIP**  
**( $V_o = 1.2$  Vdc)**

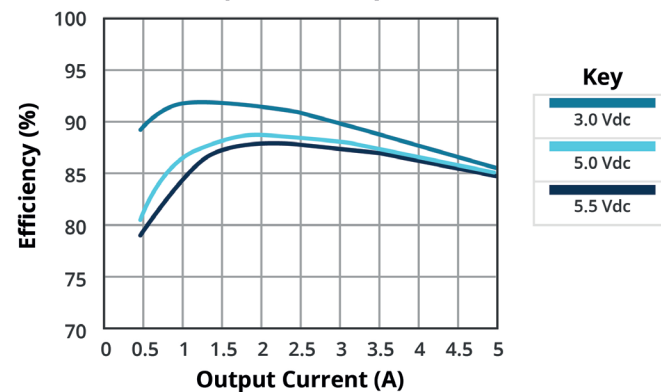


**EFFICIENCY VS OUTPUT CURRENT**  
**VPOL5A-5-SIP**  
**( $V_o = 0.75$  Vdc)**

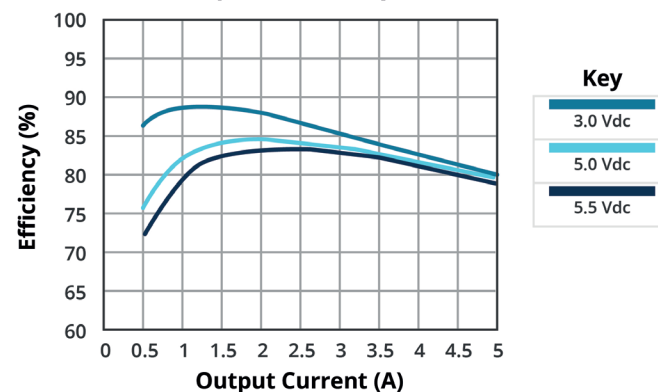

## THEORY OF OPERATION


A block diagram of the VPOL5A-5-SIP Series converter is shown in Figure 2. Extremely high efficiency power conversion is achieved through the use of synchronous rectification and drive techniques. Essentially, the powerful VPOL5A-5-SIP series topology is based on a non-isolated synchronous buck converter. The control loop is optimized for unconditional stability, fast transient response and a very tight line and load regulation. In a typical pre-bias application the VPOL5A-5-SIP series converters do not draw any reverse current at start-up. The output voltage can be adjusted from 0.75 to 3.63Vdc, using the TRIM pin with a external resistor. The converter can be shut down via a remote on/off input that is referenced to ground. This input is compatible with popular logic devices; a 'positive' logic input is supplied as standard. Positive logic implies that the converter is enabled if the remote on/off input is high (or floating), and disabled if it is low. The converter is also protected against over-temperature conditions. If the converter is overloaded or the ambient temperature gets too high, the converter will shut down to protect the unit.

Figure 2

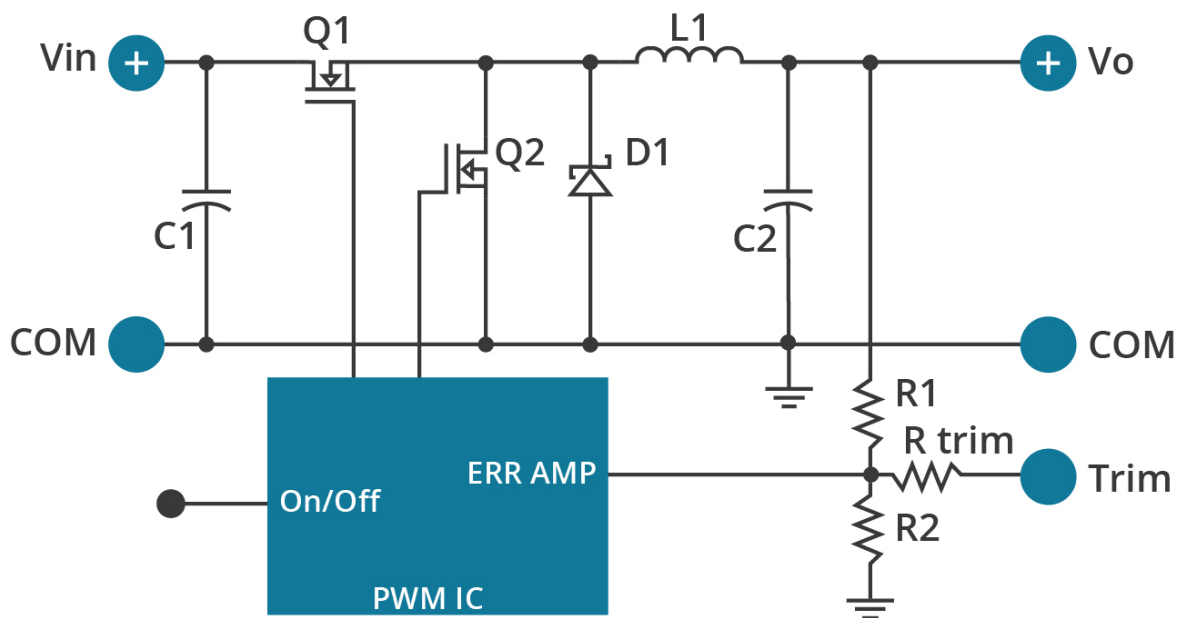

## TYPICAL APPLICATION CIRCUITS

The SIP converters must be connected to a low ac source impedance. To avoid problems with loop stability source inductance should be low. Also, the input capacitors should be placed close to the converter input pins to de-couple distribution inductance. However, the external input capacitors are chosen for suitable ripple handling capability. Low ESR polymers are a good choice. They have high capacitance, high ripple rating and low ESR (typical <100mΩ). Electrolytic capacitors should be avoided. Circuit as shown in Figure 3 represents typical measurement methods for ripple current. Input reflected-ripple current is measured with a simulated source Inductance of 1μH. Current is measured at the input of the module.

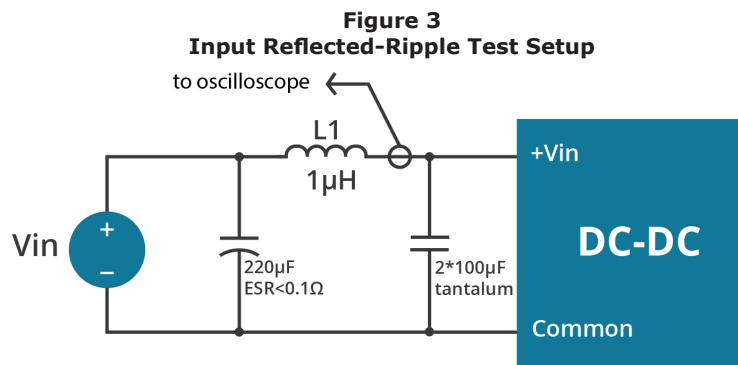

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 4. Things to note are that this converter is non-isolated, as such the input and output share a common ground. These grounds should be connected together via low impedance ground plane in the application circuit. When testing a converter on a bench set-up, ensure that -Vin and -Vo are connected together via a low impedance short to ensure proper efficiency and load regulation measurements are being made. When testing the VPOL5A-5-SIP series under any transient conditions please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the Efficiency, Load regulation and Line regulation.

The value of efficiency is defined as:

$$\text{Efficiency} = \frac{V_o \times I_o}{V_{in} \times I_{in}} \times 100\%$$

Note:  $V_o$  is output voltage,  $I_o$  is output current,  $V_{in}$  is input voltage,  $I_{in}$  is input current.

The value of load regulation is defined as:


$$\text{Load.reg} = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Note:  $V_{NL}$  is the output voltage at no load

The value of line regulation is defined as:

$$\text{Line.reg} = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$


Note:  $V_{HL}$  is the output voltage of maximum input voltage at full load.  
 $V_{LL}$  is the output voltage of minimum input voltage at full load

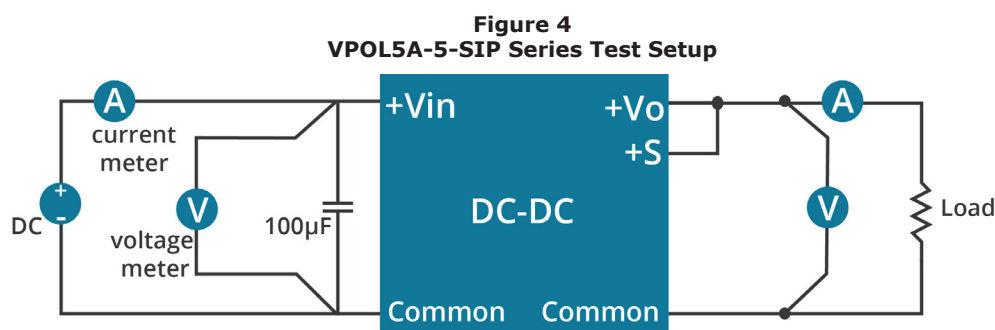

## TYPICAL APPLICATION CIRCUITS (CONTINUED)

The output Voltage of the VPOL5A-5-SIPS33A can be adjusted in the range 0.75V to 3.63V by connecting a single resistor on the motherboard (shown as Rtrim) in Figure 5. When Trim resistor is not connected the output voltage defaults to 0.75V.

**Figure 5**  
**Trim-up Voltage Setup**

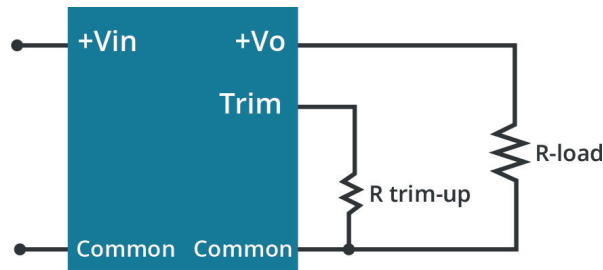

The value of Rtrim-up defined as:

$$R_{trim} = \left( \frac{21070}{V_o - 0.75} - 5110 \right)$$

Note: Rtrim-up is the external resistor in  $\Omega$ ,  $V_o$  is the desired output voltage

To give an example of the above calculation, to set a voltage of 3.3 Vdc.  
Rtrim is given by:

$$R_{trim} = \left( \frac{21070}{V_o - 0.75} - 5110 \right)$$

Note: Rtrim = 3153  $\Omega$

For various output values various resistors are calculated and provided in Table 1 for convenience:

**Table 1**  
**Trim Resistor Values**

| Vo, set (V) | Rtrim (k $\Omega$ ) |
|-------------|---------------------|
| 0.75        | open                |
| 1.20        | 41.71               |
| 1.50        | 22.98               |
| 1.80        | 14.96               |
| 2.00        | 11.75               |
| 2.50        | 6.93                |
| 3.30        | 3.15                |
| 3.63        | 2.20                |




## TYPICAL APPLICATION CIRCUITS (CONTINUED)


### Remote on/off

The remote on/off input feature of the converter allows external circuitry to turn the converter on or off. Active-high remote on/off is available as standard. The VPOL5A-5-SIP series converters are turned on if the remote on/off pin is high, or left open or floating. Setting the pin low will turn the converter off. The signal level of the remote on/off input is defined with respect to ground. If not using the remote on/off pin, leave the pin open (module will be on). The part number suffix "N" is Negative remote on/off version. The unit is guaranteed off over the full temperature range if this voltage level exceeds 2.8 Vdc. The converters are turned on if the on/off pin input is low or left open. The recommended SIP remote on/off drive circuit as shown in Figures 6 & 7.

**Figure 6**  
**Positive Remote on/off Input Drive Circuit**

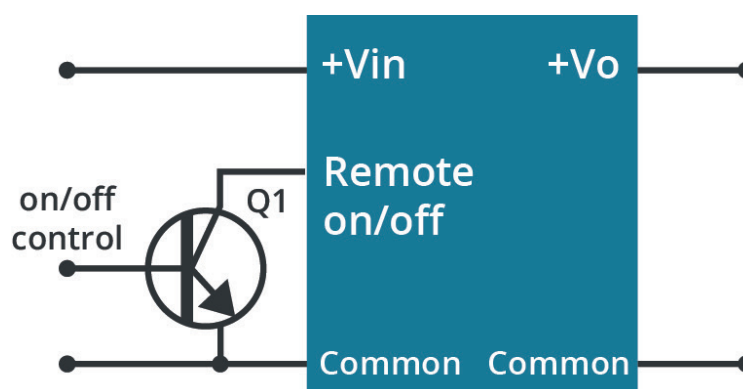


**Figure 7**  
**Negative Remote On/Off Input Drive Circuit**

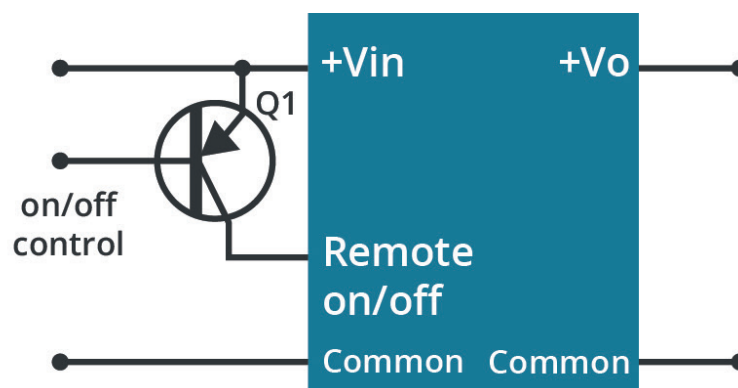

## OUTPUT RIPPLE AND NOISE MEASUREMENT

The test set-up for noise and ripple measurements is shown in Figure 8 a coaxial cable with a  $50\Omega$  termination was used to prevent impedance mismatch reflections disturbing the noise readings at higher frequencies.

**Figure 8**  
**Output Voltage Ripple and Noise Measurement Set-up**

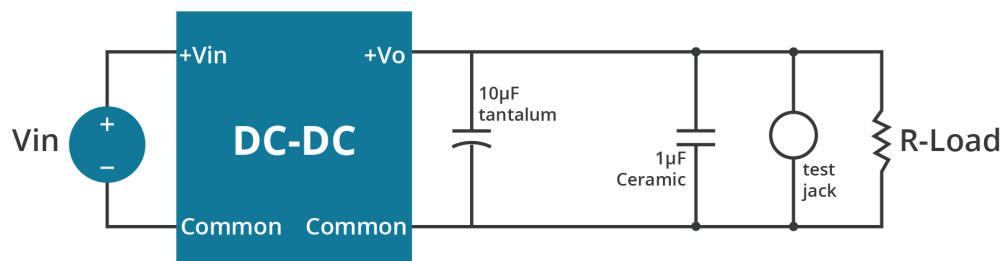

### Output Capacitance

VPOL5A-5-SIP series converters provide unconditional stability with or without external capacitors. For good transient response low ESR output capacitors should be located close to the point of load. For high current applications point has already been made in layout considerations for low resistance and low inductance tracks. Output capacitors with its associated ESR values have an impact on loop stability and bandwidth. converters are designed to work with load capacitance up-to  $3,000\mu F$ . It is recommended that any additional capacitance, Maximum  $3,000\mu F$  and low ESR, beconnected close to the point of load and outside the remote compensation point.

## REVISION HISTORY

| rev. | description                         | date       |
|------|-------------------------------------|------------|
| 1.0  | initial release                     | 08/01/2007 |
| 1.01 | datasheet updated to a new template | 10/14/2021 |

The revision history provided is for informational purposes only and is believed to be accurate.



**CUI INC**  
a bel group

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.