

# MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

## **AP3429AKTTR-G2-MS**

**Product specification**

## DESCRIPTION

The AP3429AKTTR-G2-MS is a high-efficiency, DC-to-DC step-down switching regulators, capable of delivering up to 2A of output current. The device operates from an input voltage range of 2.6V to 5.5V and provides an output voltage from 0.6V to VIN.

Working at a fixed frequency of 2MHz allows the use of small external components, such as ceramic input and output caps, as well as small inductors, while still providing low output ripples. This low noise output along with its excellent efficiency achieved by the internal synchronous rectifier, making AP3429AKTTR-G2-MS an ideal replacement for large power consuming linear regulators. Internal soft-start control circuitry reduces inrush current. Short-circuit and thermal shutdown protection improves design reliability.

The AP3429AKTTR-G2-MS is available in SOT23-5 package.




## Features

- High efficiency: up to 97%
- Up to 2A Max output current
- 2MHz switching frequency
- Low dropout 100% duty operation
- Internal compensation and soft-start
- Current mode control
- Reference 0.6V
- Logic control shutdown ( $I_Q < 1\mu A$ )
- Thermal shutdown, UVLO
- Available in SOT23-5

## Applications

- Cellular phones
- Digital cameras
- MP3 and MP4 players
- Set top boxes
- Wireless and DSL modems
- USB supplied devices in notebooks
- Portable devices


## Pin Description AND MARKING

SOT-23-5	Pin Configuration	Marking
		 <p><i>GU: Product code</i> <i>YW: Date code (Year &amp; Week)</i></p>

Order Information

Model	Package	MOQ
AP3429AKTTR-G2-MS	SOT23-5	3000

TYPICAL APPLICATION

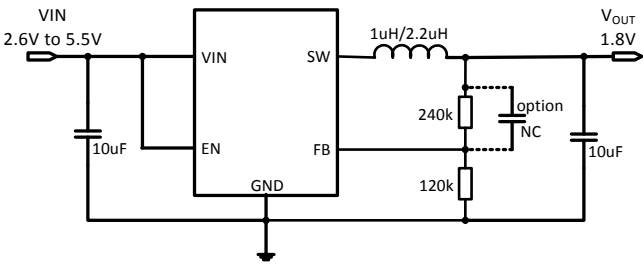

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max input voltage		8V
Max operating junction temperature(T <sub>J</sub> )		125℃
Ambient temperature(T <sub>A</sub> )		-40℃- 85℃
Maximum power dissipation	SOT23-5	400mW
Package thermal resistance(θ <sub>JA</sub> )		200℃/W
Storage temperature(T <sub>S</sub> )		-40℃ - 150℃
Lead temperature & time		260℃, 10S
ESD (HBM)		>2000V

**Note:** Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

## ELECTRICAL CHARACTERISTICS


( $V_{IN}=5V$ ,  $T_A=25$ 。C, unless otherwise specified.)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{IN}$	Input voltage range		2.6		5.5	V
$V_{OVP}$	Input overvoltage threshold			6.1		V
$V_{REF}$	Feedback voltage	$V_{in}=5V$	0.588	0.6	0.612	V
$I_{FB}$	Feedback leakage current			0.1	1	uA
$I_Q$	Quiescent current	Active, $V_{FB}=0.65$ , No Switching		80		uA
$I_{SHUTDOWN}$	Shutdown input current	$EN=0V$			1	uA
LNR	Line regulation	$V_{in}=2.6V$ to $5.5V$		0.1	0.2	%/V
LDR	Load regulation	$I_{out}=0.01$ to $1A$		0.1	0.2	%/A
$F_{SOC}$	Switching frequency		1.6	2	2.4	MHz
$R_{DSON\_P}$	PMOS $R_{dson}$			180	250	mohm
$R_{DSON\_N}$	NMOS $R_{dson}$			130	200	mohm
$V_{UVLO}$	Under voltage lockout		1.9	2.1	2.3	V
$V_{UVLO\_HY}$	UVLO hysteresis			100		mV
$I_{LIMIT}$	Peak current limit			2.7	3.3	A
$I_{NOLOAD}$		$V_{in}=5V$ , $V_{out}=3.3V$ , $I_{out}=0A$		80		uA
$I_{SWLK}$	SW leakage current	$V_{in}=6V$ , $V_{SW}=0$ or $6V$ , $EN=0V$			1	uA
$I_{ENLK}$	EN leakage current				1	uA
$V_{H\_EN}$	EN input high voltage		1.2			V
$V_{L\_EN}$	EN input low voltage				0.5	V
$T_{SD}$	Thermal shutdown temp			160		°C
$T_{SH}$	Thermal shutdown hysteresis			15		°C


## ELECTRICAL PERFORMANCE

Tested under  $T_A=25^{\circ}\text{C}$ , unless otherwise specified


**Efficiency vs. Output Current**  
( $V_{\text{out}}=1.8\text{V}$ )

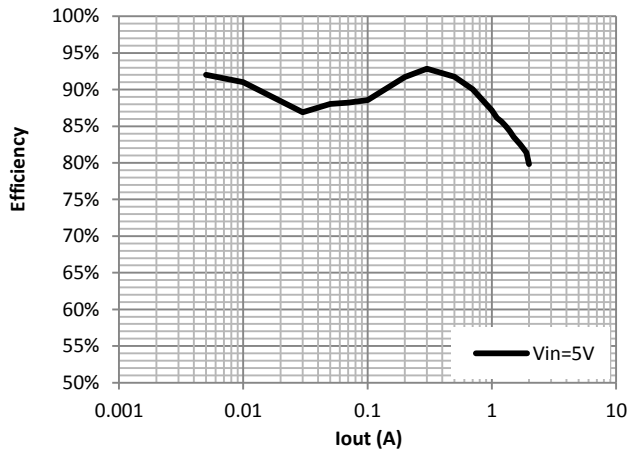


**Efficiency vs. Output Current**  
( $V_{\text{out}}=3.3\text{V}$ )

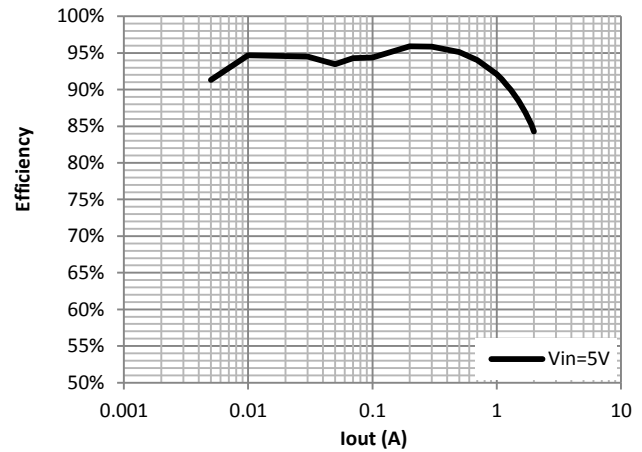

**Load Regulation**  
( $V_{\text{out}}=1.8\text{V}$ )

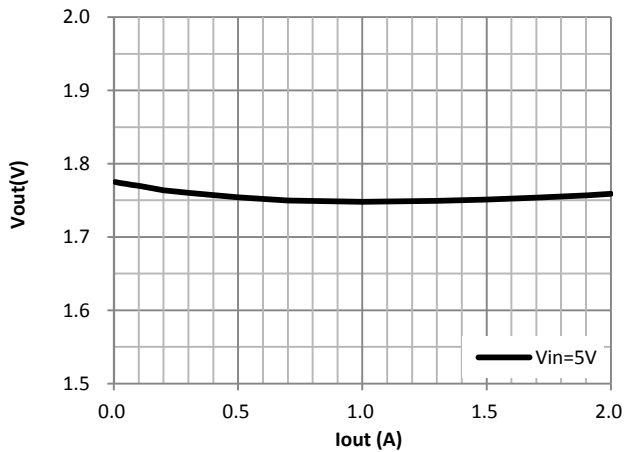


**Load Regulation**  
( $V_{\text{out}}=3.3\text{V}$ )

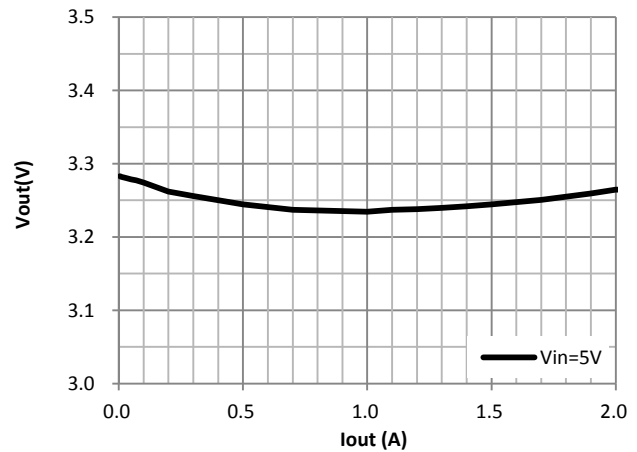


**Output Ripple and SW at 1A load**  
 $V_{\text{in}}=5\text{V} / V_{\text{out}}=1.8\text{V}$

Ch2— $V_{\text{out}}$  ripple, Ch3— $V_{\text{sw}}$ , Ch4— $I_{\text{sw}}$

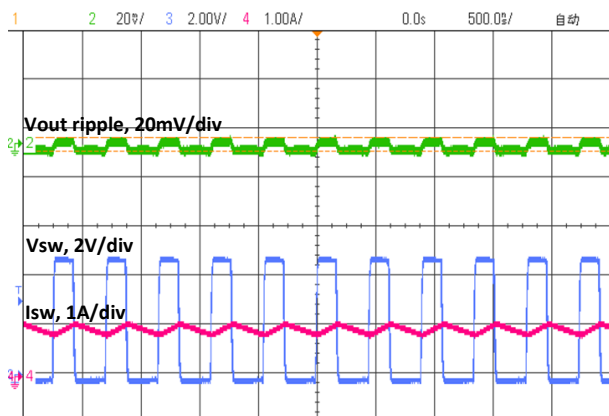


**Output Ripple and SW at 1A load**  
 $V_{\text{in}}=5\text{V} / V_{\text{out}}=3.3\text{V}$

Ch2— $V_{\text{out}}$  ripple, Ch3— $V_{\text{sw}}$ , Ch4— $I_{\text{sw}}$

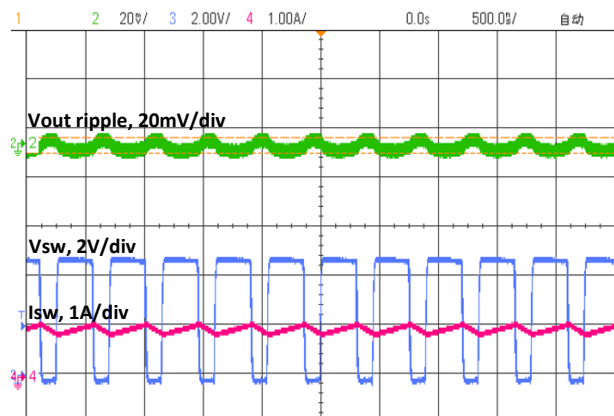


**Load Transient**

Vin=5V / Vout=1.2V / Iout=0.01~1.5A  
Ch2—Vout ripple, Ch4—Iout

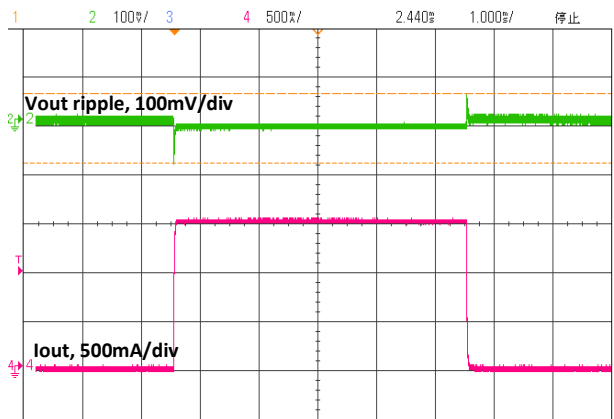

**Load Transient**


Vin=5V / Vout=3.3V / Iout=0.01~1.5A  
Ch2—Vout ripple, Ch4—Iout

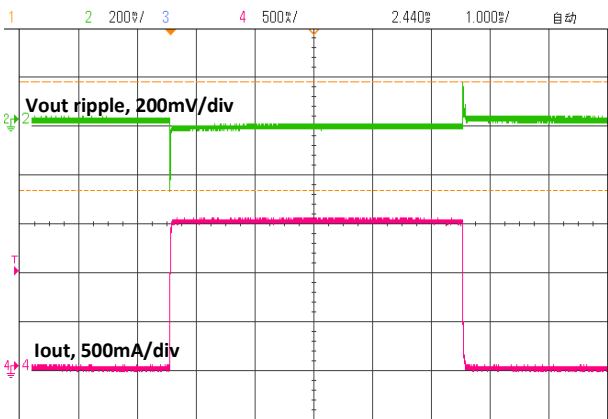

**PIN DESCRIPTION**

PIN #	NAME	DESCRIPTION
1	EN	Enable pin for the IC. Drive the pin to high to enable the part, and low to disable
2	GND	Ground
3	SW	Inductor connection. Connect an inductor between SW and the regulator output.
4	VIN	Supply voltage.
5	FB	Feedback input. Connect an external resistor divider from the output to FB and GND to set the output to a voltage between 0.6V and Vin

**BLOCK DIAGRAM**

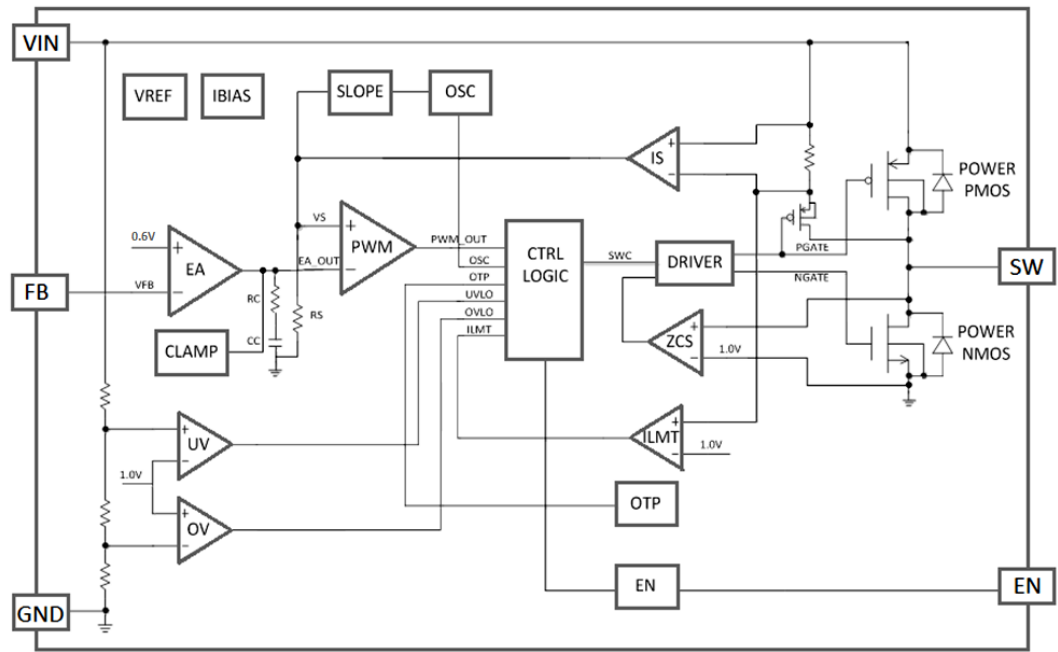

## DETAILED DESCRIPTION

The AP3429AKTTR-G2-MS high-efficiency switching regulator is a small, simple, DC-to-DC step-down converter capable of delivering up to 2A of output current. The device operates in pulse-width modulation (PWM) at 2MHz from a 2.6V to 5.5V input voltage and provides an output voltage from 0.6V to VIN, making the AP3429AKTTR-G2-MS ideal for on-board post-regulation applications. An internal synchronous rectifier improves efficiency and eliminates the typical Schottky free-wheeling diode. Using the on resistance of the internal high-side MOSFET to sense switching currents eliminates current-sense resistors, further improving efficiency and cost.

### Loop operation

AP3429AKTTR-G2-MS uses a PWM current-mode control scheme. An open-loop comparator compares the integrated voltage-feedback signal against the sum of the amplified current-sense signal and the slope compensation ramp. At each rising edge of the internal clock, the internal high-side MOSFET turns on until the PWM comparator terminates the on cycle. During this on-time, current ramps up through the inductor, sourcing current to the output and storing energy in the inductor. The current mode feedback system regulates the peak inductor current as a function of the output voltage error signal. During the off cycle, the internal high-side P-channel MOSFET turns off, and the internal low-side N-channel MOSFET turns on. The inductor releases the stored energy as its current ramps down while still providing current to the output.

### Current sense

An internal current-sense amplifier senses the current through the high-side MOSFET during on time and produces a proportional current signal, which is used to sum with the slope compensation signal. The summed signal then is compared with

the error amplifier output by the PWM comparator to terminate the on cycle.

### Current limit

There is a cycle-by-cycle current limit on the high-side MOSFET of 2.7A (typ). When the current flowing out of SW exceeds this limit, the high-side MOSFET turns off and the synchronous rectifier turns on. AP3429AKTTR-G2-MS utilizes a frequency fold-back mode to prevent overheating during short-circuit output conditions. The device enters frequency fold-back mode when the FB voltage drops below 100mV, limiting the current to 2.7A (typ) and reducing power dissipation. Normal operation resumes upon removal of the short-circuit condition.

### Soft-start

AP3429AKTTR-G2-MS has an internal soft-start circuitry to reduce supply inrush current during startup conditions. When the device exits under-voltage lockout (UVLO), shutdown mode, or restarts following a thermal shutdown event, the soft-start circuitry slowly ramps up current available at SW.

### UVLO

If VIN drops below 2.1V, the UVLO circuit inhibits switching. Once VIN rises above 2.2V, the UVLO clears, and the soft-start sequence activates.

### Thermal shutdown

Thermal shutdown protection limits total power dissipation in the device. When the junction temperature exceeds TJ = +160°C, a thermal sensor forces the device into shutdown, allowing the die to cool. The thermal sensor turns the device on again after the junction temperature cools by 15°C, resulting in a pulsed output during continuous overload conditions. Following a thermal-shutdown condition, the soft-start sequence begins.

### Input capacitor selection

The input capacitor in a DC-to-DC converter reduces current peaks drawn from the battery or other input power source and reduces switching noise in the controller. The impedance of the input capacitor at the switching frequency should be less

## DESIGN PROCEDURE

### Setting output voltages

Output voltages are set by external resistors. The FB threshold is 0.6V.

$$R_{TOP} = R_{BOTTOM} \times \left( \frac{V_{OUT}}{0.6} - 1 \right)$$

than that of the input source so high-frequency switching currents do not pass through the input source. The output capacitor keeps output ripple small and ensures control-loop stability. The output capacitor must also have low impedance at the switching frequency. Ceramic, polymer, and tantalum capacitors are suitable, with ceramic exhibiting the lowest ESR and high-frequency impedance. Output ripple with a ceramic output capacitor is approximately as follows:


$$\Delta I_L = \frac{V_{OUT}}{L \times f_S} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right)$$

$$\Delta V_{OUT} = \frac{V_{OUT}}{8 \times f_S^2 \times L \times C_{OUT}} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right)$$

If the capacitor has significant ESR, the output ripple component due to capacitor ESR is as follows:

$$\Delta V_{OUT} = \frac{V_{OUT}}{f_S \times L} \times \left(1 - \frac{V_{OUT}}{V_{IN}}\right) \times R_{ESR}$$


## LAYOUT GUIDE

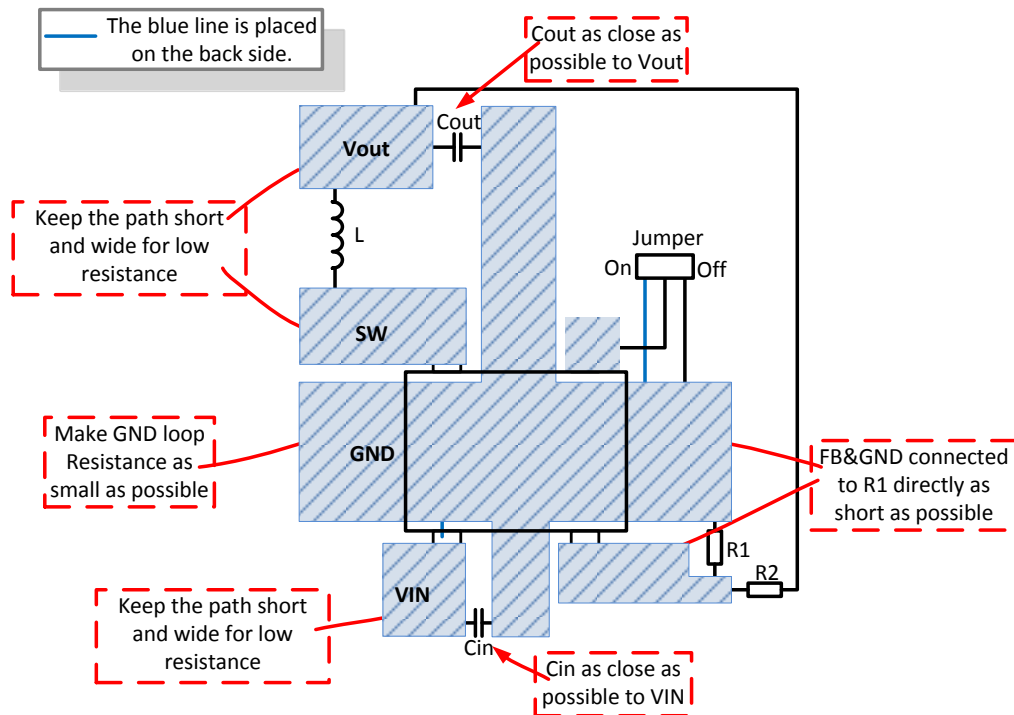



PACKAGE DESCRIPTION

SOT23-5

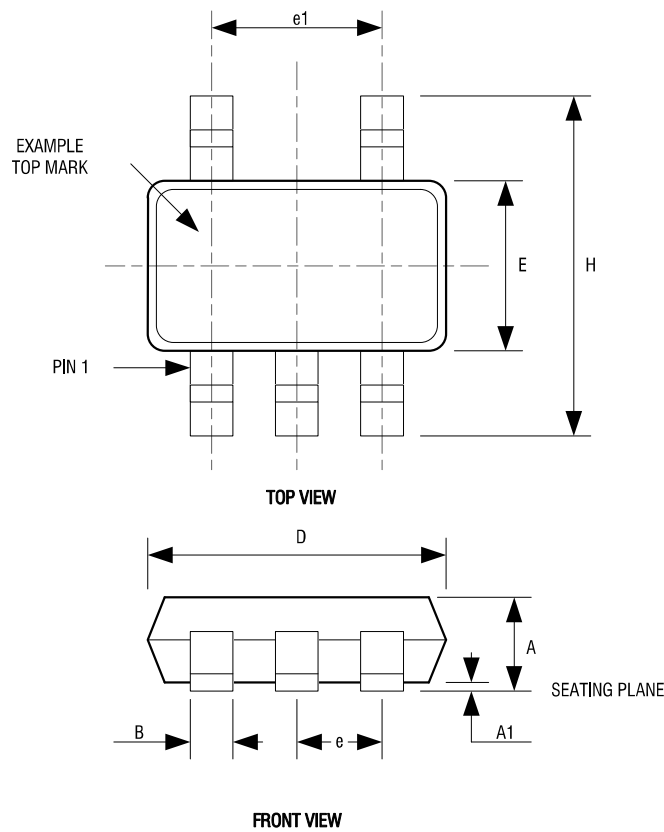

5LD SOT-23 PACKAGE OUTLINE DIMENSIONS

Dimension	Min.	Max.
A	1.05	1.35
A1	0.04	0.15
B	0.3	0.5
C	0.09	0.2
D	2.8	3.0
H	2.5	3.1
E	1.5	1.7
e	0.95 REF.	
e1	1.90 REF.	
L1	0.2	0.55
L	0.35	0.8
Q	0°	10°

NOTE:  
1.DIMENSIONS ARE IN MILLIMETERS  
2.DRAWING NOT TO SCALE  
3.DIMENSIONS ARE INCLUSIVE OF PLATING  
4.DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR

## Attention

■ Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.

■ MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specification of any and all MSKSEMI Semiconductor products described or contained herein.

■ Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.