

# MSKSEMI 美森科

SEMICONDUCTOR



ESD



TVS



TSS



MOV



GDT



PLED

## MSXRP7665IDBTR-F

Product specification

## GENERAL DESCRIPTION

The MSXRP7665IDBTR-F is a high frequency, synchronous, rectified, step-down, switch-mode converter with internal power MOSFETs. It offers a very compact solution to achieve a 4A peak output current over a wide input supply range, with excellent load and line regulation.

The MSXRP7665IDBTR-F requires a minimal number of readily available external components and is available in a space saving ESOP8 package.


## FEATURES

- Wide 4V to 18V Operating Input Range
- 3A Continuous Output Current
- 500kHz Switching Frequency
- Short Protection with Hiccup-Mode
- Built-in Over Current Limit
- Built-in Over Voltage Protection
- Internal Power-Save Mode (PFM/PWM)
- Internal Soft-Start
- 70mΩ/50mΩ Low RDS(ON) Internal Power MOSFETs
- Output Adjustable from 0.925V
- No Schottky Diode Required
- Integrated internal compensation
- Thermal Shutdown
- Available in ESOP8 Package
- -40°C to +85°C Temperature Range

## APPLICATIONS

- Digital Set-top Box (STB)
- Tablet Personal Computer (Pad)
- Flat-Panel Television and Monitor
- Wi-Fi Router / AP
- Digital Video Recorder (DVR)
- Portable Media Player (PMP)
- Cable Modem / XDSL
- General Purposes

## Reference News

| Type No          | ESOP8                                                                               | MARKING                                                                               |
|------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| MSXRP7665IDBTR-F |  |  |

## Typical Application Circuit

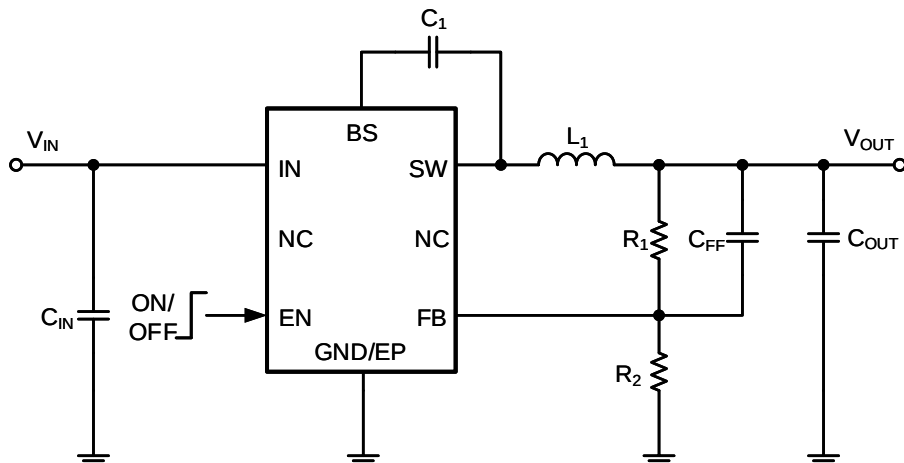


Figure 1. Basic Application Circuit


## Absolute Maximum Ratings

|                                         |                  |                                 |                                     |
|-----------------------------------------|------------------|---------------------------------|-------------------------------------|
| $V_{IN}$ , EN, Voltage .....            | -0.3V to 21V     | $V_{SW}$ Voltage .....          | -0.3V to ( $V_{IN}+0.5V$ )          |
| $V_{FB}$ Voltages .....                 | -0.3 to 6V       | $V_{BS}$ Voltage .....          | ( $V_{sw}-0.3$ ) to ( $V_{sw}+5V$ ) |
| Operating Temperature Range .....       | -40 °C to +85 °C | Storage Temperature Range ..... | -65 °C to 150 °C                    |
| Lead Temperature (Soldering, 10s) ..... | +300 °C          | Junction Temperature.....       | +150 °C                             |
| ESD (Human Body Made) HMB.....          | 2KV              | ESD (Machine Made) MM.....      | 200V                                |

Note1: Exceeding these ratings may damage the device.

Note2: The device is not guaranteed to function outside of its operating conditions.

## Pin Description

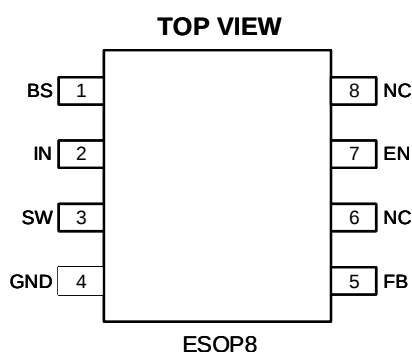

| Pin | Name | Function                                                                                                                          |
|-----|------|-----------------------------------------------------------------------------------------------------------------------------------|
| 1   | BS   | Bootstrap. A capacitor connected between SW and BS pins is required to form a floating supply across the high-side switch driver. |
| 2   | IN   | Power Supply Pin                                                                                                                  |
| 3   | SW   | Switching Pin                                                                                                                     |
| 4   | GND  | Ground Pin                                                                                                                        |
| 5   | FB   | Adjustable Version Feedback input. Connect FB to the center point of the external resistor divider                                |
| 6   | NC   |                                                                                                                                   |
| 7   | EN   | Drive this pin to a logic-high to enable the IC. Drive to a logic-low to disable the IC and enter micro-power shutdown mode.      |
| 8   | NC   |                                                                                                                                   |
| 9   | EPAD | Ground Pin                                                                                                                        |

## Electrical Characteristics

| Parameter                        | Conditions                                     | Min   | Typ.  | Max  | Unit       |
|----------------------------------|------------------------------------------------|-------|-------|------|------------|
| Input Voltage Range              |                                                | 4     |       | 18   | V          |
| Supply Current in Operation      | $V_{EN}=3.0V$ , $V_{FB}=1.1V$                  |       | 0.4   | 0.6  | mA         |
| Supply Current in Shutdown       | $V_{EN}=0$ or $EN = GND$                       |       |       | 4    | $\mu A$    |
| Regulated Feedback Voltage       | $T_A = 25^\circ C$ , $4V \leq V_{IN} \leq 18V$ | 0.904 | 0.925 | 0.94 | V          |
| High-Side Switch On-Resistance   |                                                |       | 70    |      | $m\Omega$  |
| Low-Side Switch On-Resistance    |                                                |       | 50    |      | $m\Omega$  |
| High-Side Switch Leakage Current | $V_{EN}=0V$ , $V_{SW}=0V$                      |       | 0     | 10   | $\mu A$    |
| Upper Switch Current Limit       | Minimum Duty Cycle                             |       | 4     |      | A          |
| Oscillation Frequency            |                                                |       | 500   |      | KHz        |
| Maximum Duty Cycle               | $V_{FB}=0.925V$                                |       | 92    |      | %          |
| Minimum On-Time                  |                                                |       | 60    |      | nS         |
| Minimum Off-Time                 |                                                |       | 90    |      | nS         |
| EN up Threshold                  | $V_{EN}$ -Rising                               | 1.05  | 1.15  | 1.25 | V          |
| EN Threshold Hysteresis          |                                                |       | 140   |      | mV         |
| Soft Start                       |                                                |       |       | 1.2  | mS         |
| Thermal Shutdown                 |                                                |       | 160   |      | $^\circ C$ |
| Thermal Hysteresis               |                                                |       | 20    |      | $^\circ C$ |

## Functional Block Diagram

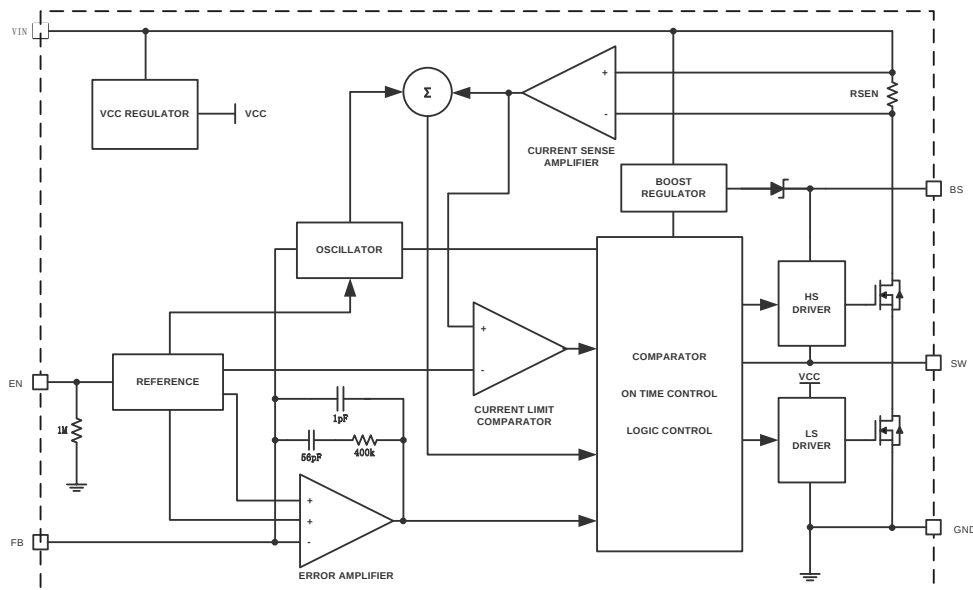


Figure 2. MSXRP7665IDBTR-F Block Diagram

## Functions Description

### Internal Regulator

The MSXRP7665IDBTR-F is a current mode step down DC/DC converter that provides excellent transient response with no extra external compensation components. This device contains an internal, low resistance, high voltage power MOSFET, and operates at a high 500KHz operating frequency to ensure a compact, high efficiency design with excellent AC and DC performance.

### Error Amplifier

The error amplifier compares the FB pin voltage with the internal FB reference (VFB) and outputs a current proportional to the difference between the two. This output current is then used to charge or discharge the internal compensation network, which is used to control the power MOSFET current. The optimized internal compensation network minimizes the external component counts and simplifies the control loop design.

### Internal Soft-Start

The soft-start is implemented to prevent the converter output voltage from overshooting during startup. When the chip starts, the internal circuitry generates a soft-start voltage (SS) ramping up from 0V to 0.925V. When it is lower than the internal reference (REF), SS overrides REF so the error amplifier uses SS as the reference. When SS is higher than REF, REF regains control. The SS time is internally max to 1.2ms.

### Over Current Protection & Hiccup

The MSXRP7665IDBTR-F has cycle-by-cycle over current limit when the inductor current peak value exceeds the set current limit threshold. Meanwhile, output voltage starts to drop until FB is below the Under-Voltage (UV) threshold, typically 25% below the reference. Once a UV is triggered, the MSXRP7665IDBTR-F enters hiccup mode to periodically

restart the part. This protection mode is especially useful when the output is dead-short to ground. The average short circuit current is greatly reduced to alleviate the thermal issue and to protect the regulator.

The MSXRP7665IDBTR-F exits the hiccup mode once the over current condition is removed.

### Startup and Shutdown

If both VIN and EN are higher than their appropriate thresholds, the chip starts. The reference block starts first, generating stable reference voltage and currents, and then the internal regulator is enabled. The regulator provides stable supply for the remaining circuitries. Three events can shut down the chip: EN low, VIN low and thermal shutdown. In the shutdown procedure, the signaling path is first blocked to avoid any fault triggering. The comp voltage and the internal supply rail are then pulled down. The floating driver is not subject to this shutdown command.

## Applications Information

### Setting the Output Voltage

MSXRP7665IDBTR-F require an input capacitor, an output capacitor and an inductor. These components are critical to the performance of the device. MSXRP7665IDBTR-F are internally compensated and do not require external components to achieve stable operation. The output voltage can be programmed by resistor divider.

$$V_{OUT} = V_{FB} \times \frac{R1 + R2}{R2}$$

| V <sub>OUT</sub> | R1      | R2   | L1 <sub>MIN</sub> | L1 <sub>TYP</sub> | L1 <sub>MAX</sub> | C <sub>IN</sub> | C <sub>OUT</sub> |
|------------------|---------|------|-------------------|-------------------|-------------------|-----------------|------------------|
| 1V               | 4.05KΩ  | 50KΩ | 2.2μH             | 2.2μH             | 4.7μH             | 20-47uF         | 20-68uF          |
| 1.05V            | 6.76KΩ  | 50KΩ | 2.2μH             | 2.2μH             | 4.7μH             | 20-47uF         | 20-68uF          |
| 1.2V             | 14.9KΩ  | 50KΩ | 2.2μH             | 2.2μH             | 4.7μH             | 20-47uF         | 20-68uF          |
| 1.5V             | 31.1KΩ  | 50KΩ | 2.2μH             | 2.2μH             | 4.7μH             | 20-47uF         | 20-68uF          |
| 3.3V             | 128.4KΩ | 50KΩ | 3.3μH             | 3.3μH             | 4.7μH             | 20-47uF         | 20-68uF          |
| 5.0V             | 220KΩ   | 50KΩ | 3.3μH             | 4.7μH             | 4.7μH             | 20-47uF         | 20-68uF          |

### Selecting the Inductor

The recommended inductor values are shown in the Application Diagram. It is important to guarantee the inductor core does not saturate during any foreseeable operational situation. The inductor should be rated to handle the peak load current plus the ripple current: Care should be taken when reviewing the different saturation current ratings that are specified by different manufacturers. Saturation current ratings are typically specified at 25 °C, so ratings at maximum ambient temperature of the application should be requested from the manufacturer.

$$L = \frac{V_{OUT} \times (V_{IN} - V_{OUT})}{V_{IN} \times \Delta I_L \times F_{OSC}}$$

Where ΔIL is the inductor ripple current. Choose inductor ripple current to be approximately 30% if the maximum load current. The maximum inductor peak current is:

$$I_{L(MAX)} = I_{LOAD} + \frac{\Delta I_L}{2}$$

Under light load conditions below 100mA, larger inductance is recommended for improved efficiency.

## Selecting the Output Capacitor

Special attention should be paid when selecting these components. The DC bias of these capacitors can result in a capacitance value that falls below the minimum value given in the recommended capacitor specifications table.

The ceramic capacitor's actual capacitance can vary with temperature. The capacitor type X7R, which operates over a temperature range of  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , will only vary the capacitance to within  $\pm 15\%$ . The capacitor type X5R has a similar tolerance over a reduced temperature range of  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ . Many large value ceramic capacitors, larger than  $1\mu\text{F}$  are manufactured with Z5U or Y5V temperature characteristics. Their capacitance can drop by more than 50% as the temperature varies from  $25^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . Therefore X5R or X7R is recommended over Z5U and Y5V in applications where the ambient temperature will change significantly above or below  $25^{\circ}\text{C}$ .

Tantalum capacitors are less desirable than ceramic for use as output capacitors because they are more expensive when comparing equivalent capacitance and voltage ratings in the  $0.47\mu\text{F}$  to  $44\mu\text{F}$  range. Another important consideration is that tantalum capacitors have higher ESR values than equivalent size ceramics. This means that while it may be possible to find a tantalum capacitor with an ESR value within the stable range, it would have to be larger in capacitance (which means bigger and more costly) than a ceramic capacitor with the same ESR value. It should also be noted that the ESR of a typical tantalum will increase about 2:1 as the temperature goes from  $25^{\circ}\text{C}$  down to  $-40^{\circ}\text{C}$ , so some guard band must be allowed.


## PC Board Layout Consideration

PCB layout is very important to achieve stable operation. It is highly recommended to duplicate EVB layout for optimum performance. If change is necessary, please follow these guidelines for reference.


1. Keep the path of switching current short and minimize the loop area formed by Input capacitor, high-side MOSFET and low-side MOSFET.
2. Bypass ceramic capacitors are suggested to be put close to the Vin Pin.
3. Ensure all feedback connections are short and direct. Place the feedback resistors and compensation components as close to the chip as possible.
4. VOUT, SW away from sensitive analog areas such as FB.
5. Connect IN, SW, and especially GND respectively to a large copper area to cool the chip to improve thermal performance and long-term reliability.

## Package Description


### ESOP8 (EXPOSED PAD)

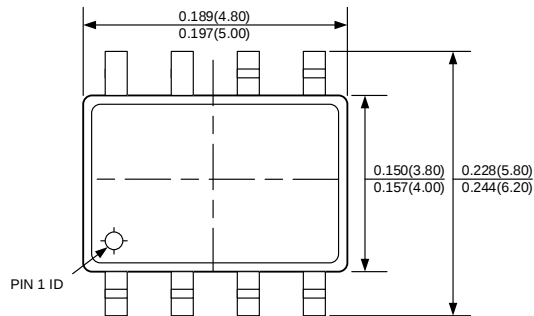


**TOP VIEW**

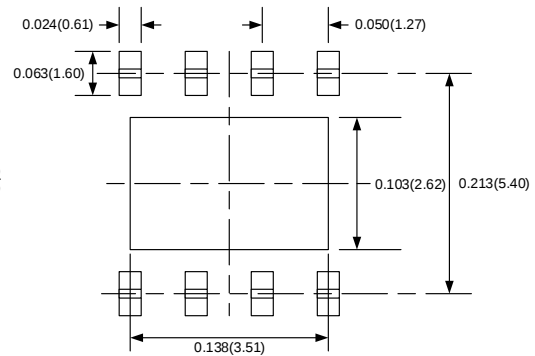


**RECOMMENDED PAD LAYOUT**

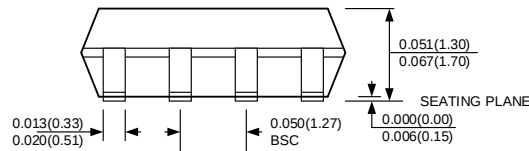

**FRONT VIEW**

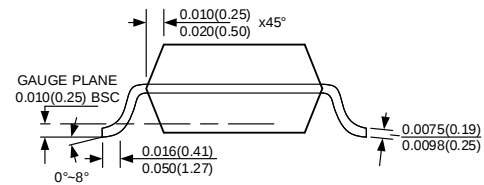

**SIDE VIEW**

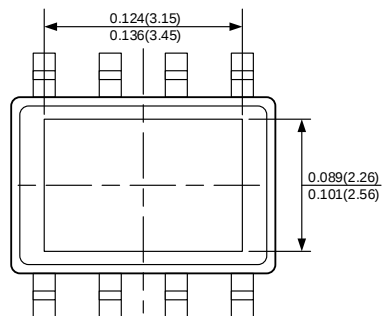

**BOTTOM VIEW**

**NOTE:**

1. CONTROL DIMENSION IS IN INCHES. DIMENSION IN BRACKET IS IN MILLIMETERS.
2. PACKAGE LENGTH DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
3. PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
4. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.004" INCHES MAX.
5. DRAWING CONFORMS TO JEDEC MS-012, VARIATION BA.
6. DRAWING IS NOT TO SCALE.

## Order Information

| Part No.         | Description                                           | Package | MOQ     |
|------------------|-------------------------------------------------------|---------|---------|
| MSXRP7665IDBTR-F | MP1484 Buck, 4-18V, 3.5A, 500KHz,VFB<br>0.925V, ESOP8 | ESOP8   | 3000PCS |

## **Attention**

■ Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.

■ MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specification of any and all MSKSEMI Semiconductor products described or contained herein.

■ Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ MSKSEMI Semiconductor strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

■ No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.

■ Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringement of intellectual property rights or other rights of third parties.

■ Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the MSKSEMI Semiconductor product that you intend to use.