

Features

- AEC-Q100 Qualified for Automotive Applications
 - Grade 1: -40°C to 125°C T_A
- Voltage Offset: $\pm 100\ \mu\text{V}$ (Max) at $V_{CM} = 2.75\ \text{V}$ for TPA191A2Q, A3Q, A4Q, A5Q, A6Q, A7Q
- Wide Common-Mode Voltage: $-0.3\ \text{V}$ to $+36\ \text{V}$
- Supply Voltage: $2.7\ \text{V}$ to $36\ \text{V}$
- Accuracy and Zero-Drift Performance
 - $\pm 1\%$ Gain Error (Max over temperature)
 - $0.2\ \mu\text{V}/^{\circ}\text{C}$ Offset Drift (Typ)
 - $10\ \text{ppm}/^{\circ}\text{C}$ Gain Drift (Max)
- Multiple Gain Options for Voltage Output
 - TPA191A1Q: $20\ \text{V/V}$
 - TPA191A2Q: $50\ \text{V/V}$
 - TPA191A3Q: $75\ \text{V/V}$
 - TPA191A4Q: $100\ \text{V/V}$
 - TPA191A5Q: $200\ \text{V/V}$
 - TPA191A6Q: $500\ \text{V/V}$
 - TPA191A7Q: $1000\ \text{V/V}$
- Low Supply Current: $80\ \mu\text{A}$ (Typ)
- Package: SOT363

Applications

- Current Sensing (High-Side/Low-Side)
- Battery Charger
- Power Management
- Cell Phone Charger
- Electrical Cigarette
- Wireless Charger
- Telecom Equipment

Description

The TPA191Q series of zero-drift, bi-directional current sense amplifiers can sense voltage drops across shunts at common-mode voltages from $-0.3\ \text{V}$ to $36\ \text{V}$, independent of the supply voltage. Multiple fixed gains are available: $20\ \text{V/V}$, $50\ \text{V/V}$, $75\ \text{V/V}$, $100\ \text{V/V}$, $200\ \text{V/V}$, $500\ \text{V/V}$, and $1000\ \text{V/V}$. The integrated gain resistor network is highly matched, which minimizes gain errors and reduces the temperature drift. The low offset of the zero-drift architecture extends the range of current sensing, it allows for smaller sense resistors with lower power loss, while still ensuring accurate current measurements.

The TPA191Q devices operate from a single 2.7-V to 36-V power supply, drawing a typical $80\text{-}\mu\text{A}$ supply current. All versions are specified from -40°C to 125°C , and offered in the SOT363 package.

Typical Application Circuit

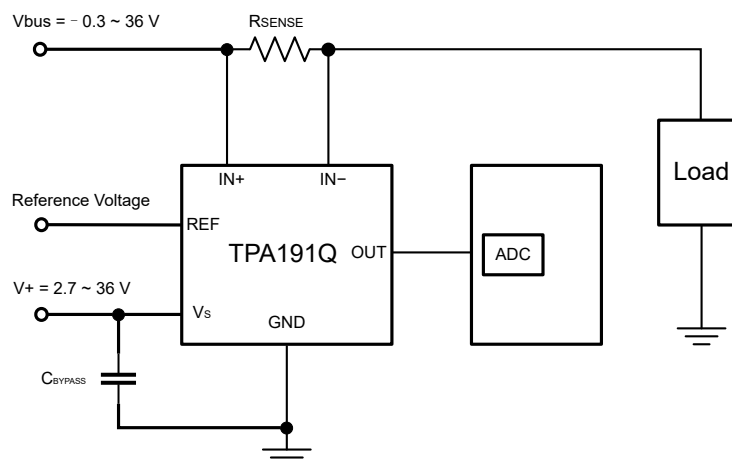


Table of Contents

Features	1
Applications	1
Description	1
Typical Application Circuit	1
Revision History	3
Pin Configuration and Functions	4
Specifications	5
Absolute Maximum Ratings ⁽¹⁾	5
ESD, Electrostatic Discharge Protection.....	5
Recommended Operating Conditions.....	5
Thermal Information.....	5
Electrical Characteristics.....	6
Typical Performance Characteristics.....	8
Detailed Description	11
Overview.....	11
Functional Block Diagram.....	11
Feature Description.....	11
Application and Implementation	12
Application Information	12
Typical Application.....	12
Layout	14
Layout Guideline.....	14
Layout Example.....	14
Tape and Reel Information	15
Package Outline Dimensions	16
SOT363.....	16
Order Information	17
IMPORTANT NOTICE AND DISCLAIMER	18

Revision History

Date	Revision	Notes
2024-10-17	Rev.A.0	Initial version.
2024-12-12	Rev.A.1	<ul style="list-style-type: none">Added new orderable part number TPA191A1Q and TPA191A5Q , and updated specification of TPA191A1Q and TPA191A5Q accordingly.Modified maximum value of VOH from 0.11-V to 0.12-V.Corrected handwriting errors.Updated the Tape and Reel Information.

Pin Configuration and Functions

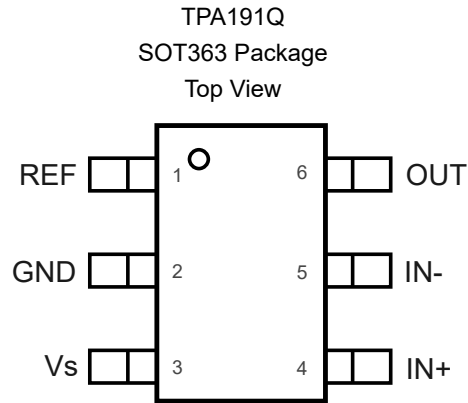


Table 1. Pin Functions: TPA191Q

Pin No.	Pin Name	I/O	Description
1	REF	I	Reference voltage, 0 V to V_s
2	GND	—	Ground
3	V_s	I	Power supply, 2.7 V to 36 V
4	IN+	I	Noninverting input
5	IN-	I	Inverting input
6	OUT	O	Output

Zero-Drift, Bi-Directional Current Sense Amplifier

Specifications

Absolute Maximum Ratings ⁽¹⁾

Parameter		Min	Max	Unit
Supply Voltage			42	V
Analog Input, IN+, IN-	Differential (IN+) – (IN-)	-42	42	V
	Common-Mode	GND – 0.3	42	V
REF Input		GND – 0.3	$V_S + 0.3$	V
Output		GND – 0.3	$V_S + 0.3$	V
Input Current into All Pins ⁽²⁾		-10	10	mA
Operating Temperature		-40	125	°C
Junction Temperature			150	°C
Storage Temperature, T _{stg}		-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

(2) Input voltage at any pin can exceed the voltage shown if the current at that pin is limited to 10 mA.

ESD, Electrostatic Discharge Protection

Parameter		Condition	Minimum Level	Unit
HBM	Human Body Model ESD	AEC Q100-002	2	kV
CDM	Charged Device Model ESD	AEC Q100-011	1.5	kV

Recommended Operating Conditions

Parameter		Min	Typ	Max	Unit
V _S	Operating Supply Voltage	2.7		36	V
V _{CM}	Common-Mode Input Voltage	-0.3		36	V
T _A	Operating Free-Air Temperature	-40		125	°C

Thermal Information

Package Type	θ _{JA}	θ _{JC}	Unit
SOT363	227	80	°C/W

Zero-Drift, Bi-Directional Current Sense Amplifier
Electrical Characteristics

All test conditions: $T_A = 27^\circ\text{C}$, $V_S = 5\text{ V to } 5.5\text{ V}$, $V_{IN+} = 12\text{ V}$, and $V_{SENSE} = V_{IN+} - V_{IN-}$, and $V_{REF} = V_S / 2$, unless otherwise noted.

Parameter		Conditions	Min	Typ	Max	Unit
Supply Voltage and Current						
V_S	Operating Voltage Range	$T_A = -40^\circ\text{C to } 125^\circ\text{C}$	2.7		36	V
I_Q	Quiescent Current	$V_{SENSE} = 0\text{ mV}$, $T_A = -40^\circ\text{C to } 125^\circ\text{C}$		80	115	μA
Input						
V_{OS}	Input Offset Voltage	$V_{SENSE} = 0\text{ mV}$, TPA191A1Q	-440	± 200	440	μV
		$V_{SENSE} = 0\text{ mV}$, TPA191A2Q	-255	± 100	255	
		$V_{SENSE} = 0\text{ mV}$, TPA191A3Q	-150	± 60	150	
		$V_{SENSE} = 0\text{ mV}$, TPA191A4Q, TPA191A5Q, TPA191A6Q, TPA191A7Q	-100	± 40	100	
		$V_{IN+} = 2.75\text{ V}$, $V_{SENSE} = 0\text{ mV}$, TPA191A1Q	-160	± 50	160	
		$V_{IN+} = 2.75\text{ V}$, $V_{SENSE} = 0\text{ mV}$, TPA191A2Q, TPA191A3Q, TPA191A4Q, TPA191A5Q, TPA191A6Q, TPA191A7Q	-100	± 50	100	
$V_{OS\text{ TC}}$	Input Offset Voltage Drift ⁽¹⁾	$T_A = -40^\circ\text{C to } 125^\circ\text{C}$		0.2		$\mu\text{V}/^\circ\text{C}$
V_{CM}	Common-Mode Input Range	$T_A = -40^\circ\text{C to } 125^\circ\text{C}$	-0.3		36	V
CMRR	Common Mode Rejection Ratio	$V_{IN+} = 0\text{ V to } 26\text{ V}$, $V_{SENSE} = 0\text{ mV}$, $T_A = -40^\circ\text{C to } 125^\circ\text{C}$, TPA191A1Q	90	120		dB
		$V_{IN+} = 0\text{ V to } 26\text{ V}$, $V_{SENSE} = 0\text{ mV}$, $T_A = -40^\circ\text{C to } 125^\circ\text{C}$, TPA191A2Q	93	120		dB
		$V_{IN+} = 0\text{ V to } 26\text{ V}$, $V_{SENSE} = 0\text{ mV}$, $T_A = -40^\circ\text{C to } 125^\circ\text{C}$, TPA191A3Q	95	120		dB
		$V_{IN+} = 0\text{ V to } 26\text{ V}$, $V_{SENSE} = 0\text{ mV}$, $T_A = -40^\circ\text{C to } 125^\circ\text{C}$, TPA191A4Q, TPA191A5Q, TPA191A6Q, TPA191A7Q	98	120		dB
I_B	Input Bias Current	$V_{SENSE} = 0\text{ mV}$		22		μA
I_{OS}	Input Offset Current	$V_{SENSE} = 0\text{ mV}$		± 0.05		μA
PSRR	Power Supply Rejection Ratio	$V_S = 2.7\text{ V to } 18\text{ V}$, $V_{IN+} = 18\text{ V}$, $V_{SENSE} = 0\text{ mV}$, $T_A = -40^\circ\text{C to } 125^\circ\text{C}$, TPA191A1Q	91	128		dB
		$V_S = 2.7\text{ V to } 18\text{ V}$, $V_{IN+} = 18\text{ V}$, $V_{SENSE} = 0\text{ mV}$, $T_A = -40^\circ\text{C to } 125^\circ\text{C}$, TPA191A2Q, TPA191A3Q,	100	128		dB

Zero-Drift, Bi-Directional Current Sense Amplifier

Parameter			Conditions	Min	Typ	Max	Unit
			TPA191A4Q, TPA191A5Q, TPA191A6Q, TPA191A7Q				
Output							
G	Gain	TPA191A1Q			20		V/V
		TPA191A2Q			50		
		TPA191A3Q			75		
		TPA191A4Q			100		
		TPA191A5Q			200		
		TPA191A6Q			500		
		TPA191A7Q			1000		
GE	Gain Error		V _{SENSE} = −5 mV to 5 mV, T _A = −40°C to 125°C		±0.05	±1	%
GE TC	Gain Error vs Temperature ⁽¹⁾		V _{SENSE} = −5 mV to 5 mV, T _A = −40°C to 125°C		3	10	ppm/°C
NE	Nonlinearity Error		V _{SENSE} = −5 mV to 5 mV		±0.05		%
C _{LOAD}	Maximum Capacitive Load		No sustained oscillation		1		nF
V _{OH}	Output Swing from V _S		R _L = 10 kΩ to REF, T _A = −40°C to 125°C		0.05	0.12	V
V _{OL}	Output Swing from GND		R _L = 10 kΩ to REF, T _A = −40°C to 125°C		0.01	0.05	V
Frequency Response							
BW	Bandwidth	TPA191A1Q	C _{LOAD} = 10 pF		150		kHz
		TPA191A2Q			80		
		TPA191A3Q			50		
		TPA191A4Q			30		
		TPA191A5Q			15		
		TPA191A6Q			6		
		TPA191A7Q			1		
SR	Slew Rate		T _A = −40°C to 125°C, V _{CM} = V _S / 2	1		3	V/μs
Noise, RTI							
e _n	Input Voltage Noise Density ⁽¹⁾				35		nV/√Hz

(1) Provided by bench test and design simulation.

Typical Performance Characteristics

All test conditions: $T_A = 25^\circ\text{C}$, $V_S = 5\text{ V}$, $V_{IN+} = 12\text{ V}$, and $V_{REF} = V_S / 2$, unless otherwise noted.

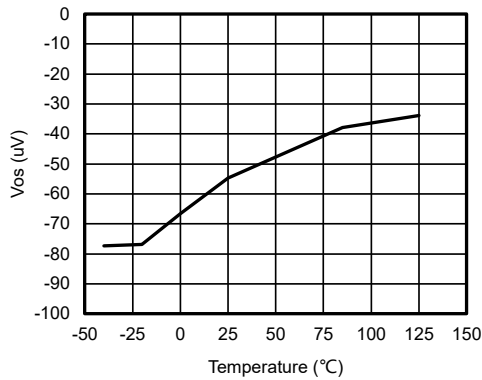


Figure 1. Offset Voltage vs Temperature

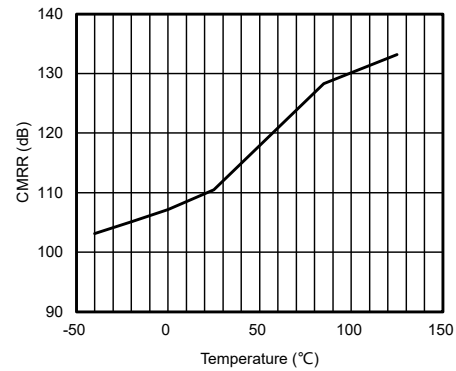


Figure 2. Common-Mode Rejection Ratio vs Temperature

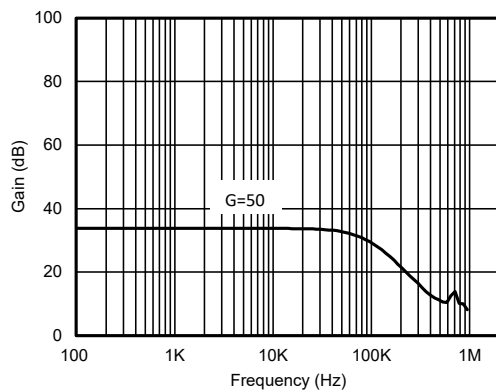


Figure 3. Gain vs Frequency

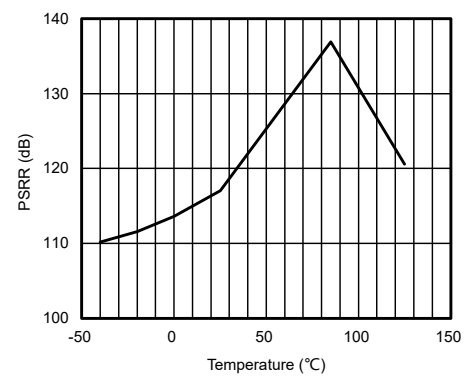


Figure 4. Power-Supply Rejection Ratio vs Temperature

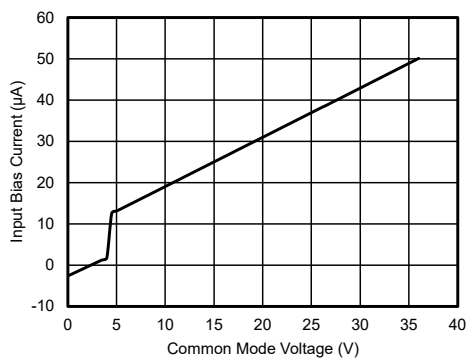


Figure 5. Input Bias Current vs Common-Mode Voltage

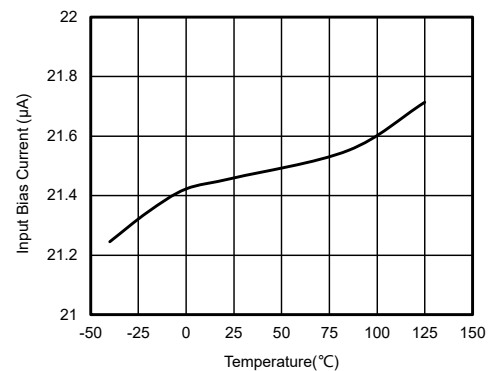


Figure 6. Input Bias Current vs Temperature

Zero-Drift, Bi-Directional Current Sense Amplifier

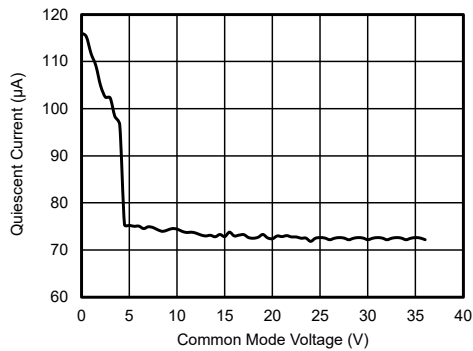


Figure 7. Quiescent Current vs Common-Mode Voltage

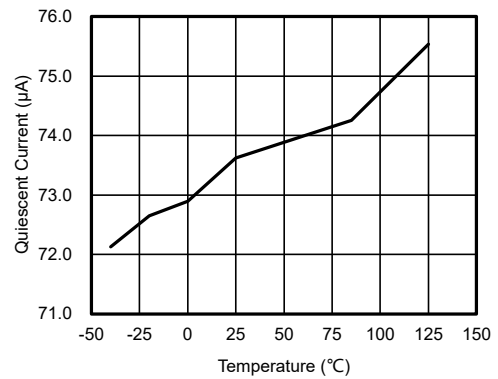


Figure 8. Quiescent Current vs Temperature

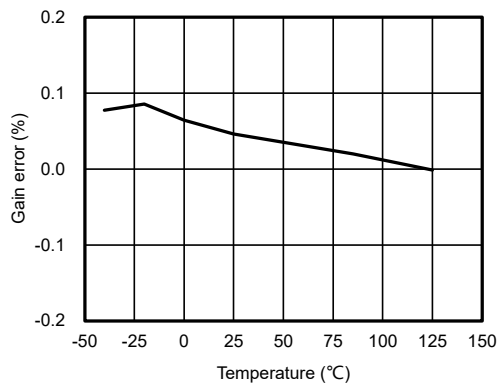


Figure 9. Gain error vs Temperature

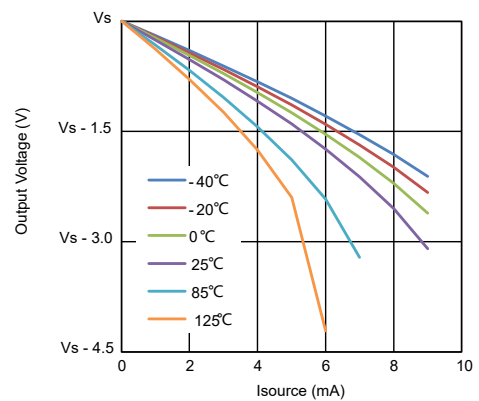


Figure 10. Output Voltage Swing vs I_{source}

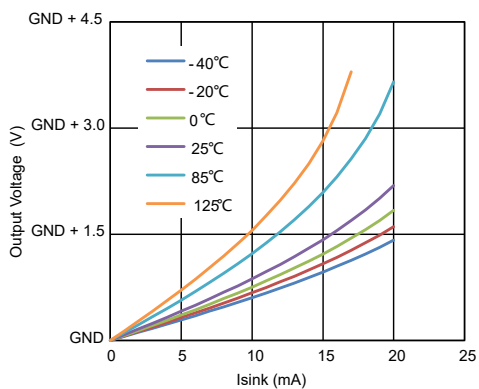


Figure 11. Output Voltage Swing vs I_{sink}

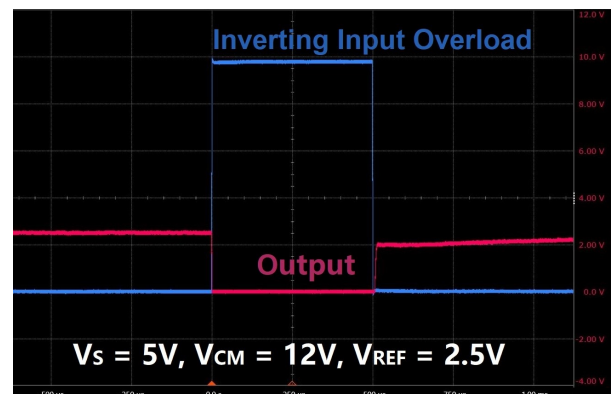


Figure 12. Inverting Differential Input Overload

Zero-Drift, Bi-Directional Current Sense Amplifier

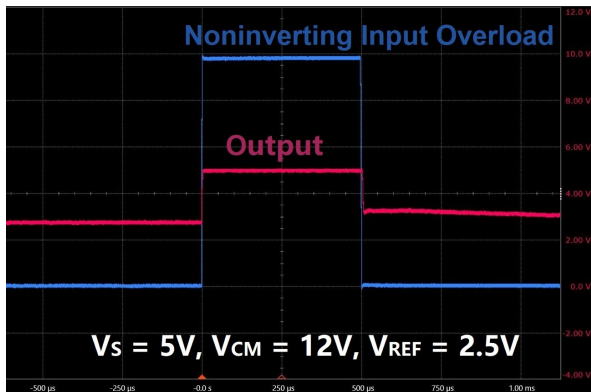


Figure 13. Noninverting Differential Input Overload

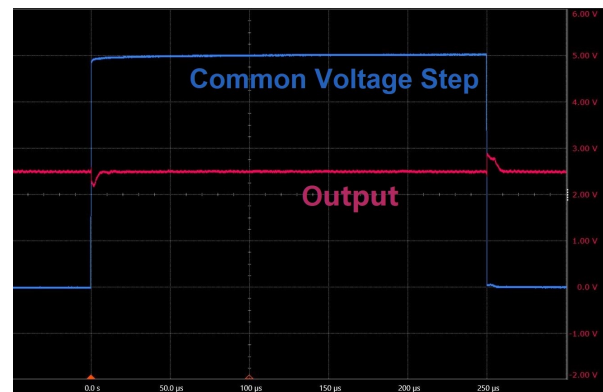


Figure 14. Common-Mode Voltage Transient Response

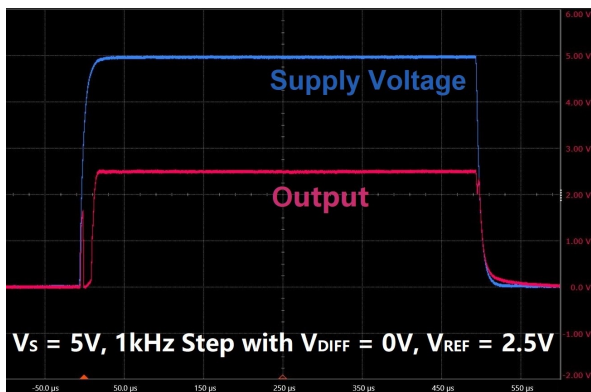


Figure 15. Start-Up Response

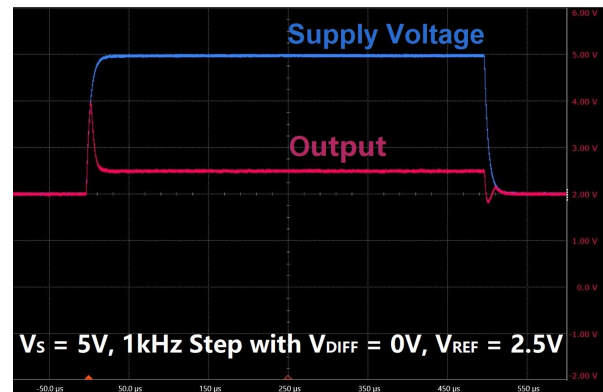


Figure 16. Brownout Recovery

Zero-Drift, Bi-Directional Current Sense Amplifier

Detailed Description

Overview

The TPA191Q series features a high-accuracy bidirectional, current-sense amplifier in various gain options, and a -0.3V to 36V input common-mode range that is independent of supply voltage (V_S). The low input offset voltage, tight gain error, and low-temperature drift characteristics allow the use of small-sense resistors for current measurements to improve power-supply conversion efficiency and accuracy of measurements. This feature allows monitoring of power-supply load current even if the rail is shorted to ground. High-side current monitoring does not interfere with the ground path of the load measured, making the IC particularly useful in a wide range of high-reliability systems. Because of its extended common-mode range below ground, the TPA191Q can also be used as a low-side current sensing element.

Functional Block Diagram

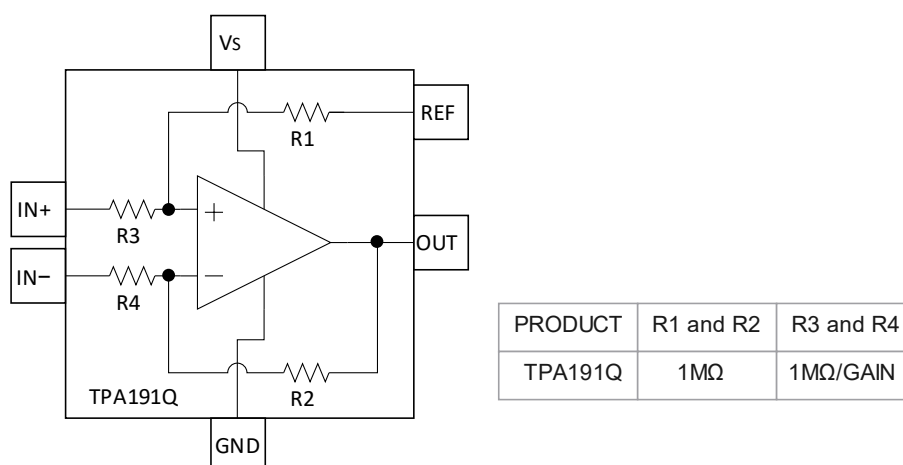


Figure 17. Functional Block Diagram

Feature Description

Wide Input Common-Mode Voltage Range

Because of the internal topology, the TPA191Q supports -0.3V to 36V input common-mode voltage that is independent of the supply voltage (V_S). The ability to operate with common-mode voltages greater or less than V_S allows the TPA191Q to be used in high-side, as well as low-side current-sensing applications.

Reference Input, REF

The TPA191Q supports both unidirectional and bidirectional current-sensing operations. Connecting the reference input (REF) to ground configures the TPA191Q for unidirectional current sensing. For unidirectional current sensing, the output is referenced to ground and the output voltage V_{OUT} is proportional to the positive voltage drop (V_{SENSE}) from $IN+$ to $IN-$. The TPA191Q operates as a bidirectional Current-Sense-Amplifier (CSA) by the application of a low source impedance reference voltage to REF above ground, typically $V_S/2$. In the bidirectional current-sensing mode of operation, the output voltage V_{OUT} is referenced to V_{REF} .

Application and Implementation

Note

Information in the following application sections is not part of the 3PEAK's component specification and 3PEAK does not warrant its accuracy or completeness. 3PEAK's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

Application Information

The TPA191Q monitors the current through a current-sense resistor and amplifies the voltage across the resistor. The 36-V input common-mode voltage range of the TPA191Q is independent of the supply voltage. It is a bidirectional, current-sense amplifier capable of measuring currents through a resistive shunt in two directions.

Typical Application

Figure 18 and Figure 19 show the typical application schematics of Unidirectional and Bidirectional applications.

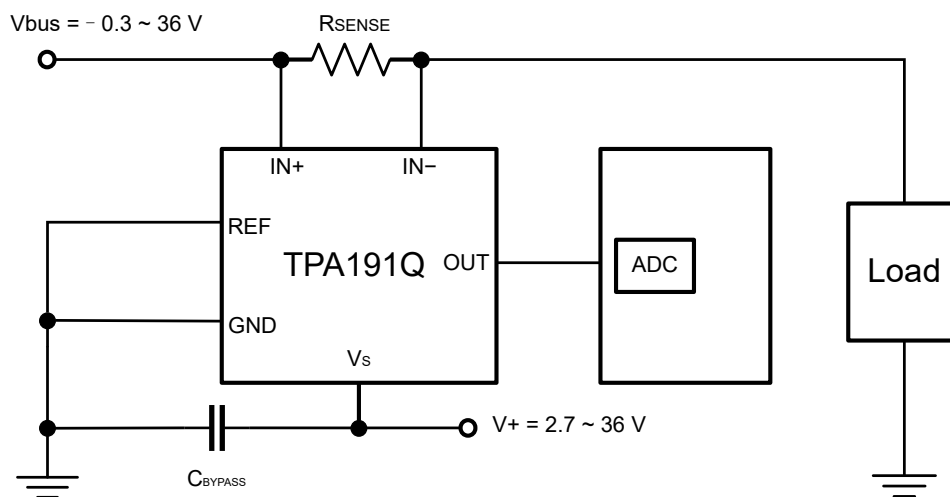


Figure 18. Unidirectional Application Schematic

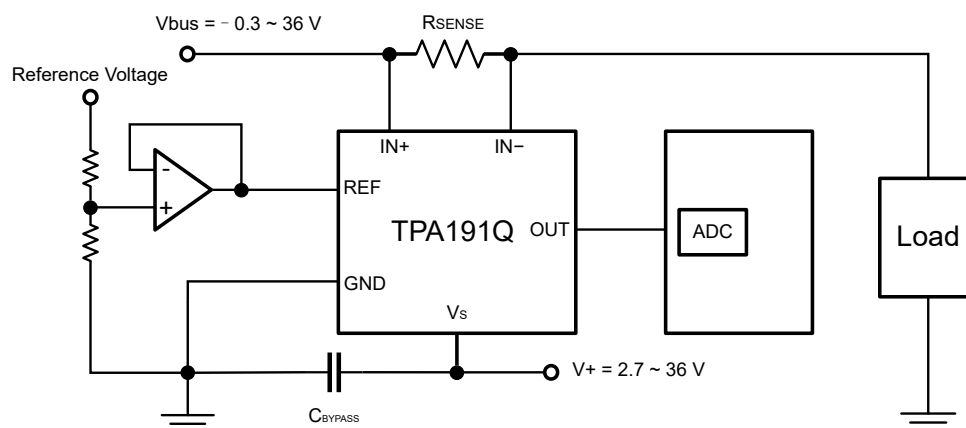


Figure 19. Bidirectional Application Schematic

Zero-Drift, Bi-Directional Current Sense Amplifier**Bidirectional and Unidirectional Operation**

The TPA191Q series of products are capable of both unidirectional and bidirectional operations. For unidirectional current-sense applications, connect the REF input to GND. For bidirectional, connect REF to a reference. This sets bidirectional current sense with $V_{OUT} = V_{REF}$ for $V_{SENSE} = 0$ mV. Positive V_{SENSE} causes OUT to swing toward the positive supply, while negative V_{SENSE} causes OUT to swing toward GND. This feature allows the output voltage to measure both charge and discharge currents. Use $V_{REF} = V_S/2$ for the maximum dynamic range.

Battery-powered systems require a precise bidirectional current-sense amplifier to accurately monitor the battery's charge and discharge currents. Measurements of OUT with respect to V_{REF} yield positive and negative voltages during charge and discharge cycles.

Choosing the Sense Resistor

A high R_{SENSE} value causes the power-source voltage to drop due to IR loss. For the minimal voltage loss, use the lowest R_{SENSE} value. At high current levels, the I^2R losses in R_{SENSE} can be significant. This should be taken into consideration when choosing the resistor value and its power dissipation (wattage) rating. The sense resistor's value will drift if it is allowed to heat up excessively. A high R_{SENSE} value allows lower currents to be measured more accurately because offsets are less significant when the sense voltage is larger. Note that the tolerance and temperature coefficient of the chosen resistors directly affect the precision of any measurement system. For best performance, select R_{SENSE} to provide approximately the maximum input differential sense voltage with full-scale output voltage for each application. Sense resistors of 5 mΩ to 100 mΩ are available with 1% accuracy or better.

Layout

Layout Guideline

- Because the high currents may flow through R_{SENSE} based on the application, take care to eliminate solder and parasitic trace resistance from causing errors in the sense voltage. Either use a four-terminal current sense resistor or use Kelvin (force and sense) PCB layout techniques.
- Make sure the sense resistor has as much copper trace area as possible to dissipate heat as the resistor value changes slightly with temperature. Also, see the resistor manufacturer datasheet or application notes for further layout guidelines.
- The power-supply bypass capacitor should be placed as closely as possible to the supply and ground. The recommended value of this bypass capacitor is 0.1 μF . Additional decoupling capacitance can be added to compensate for noisy or high-impedance power supplies.

Layout Example

Figure 20 shows the location of external components as they appear on the PCB diagram.


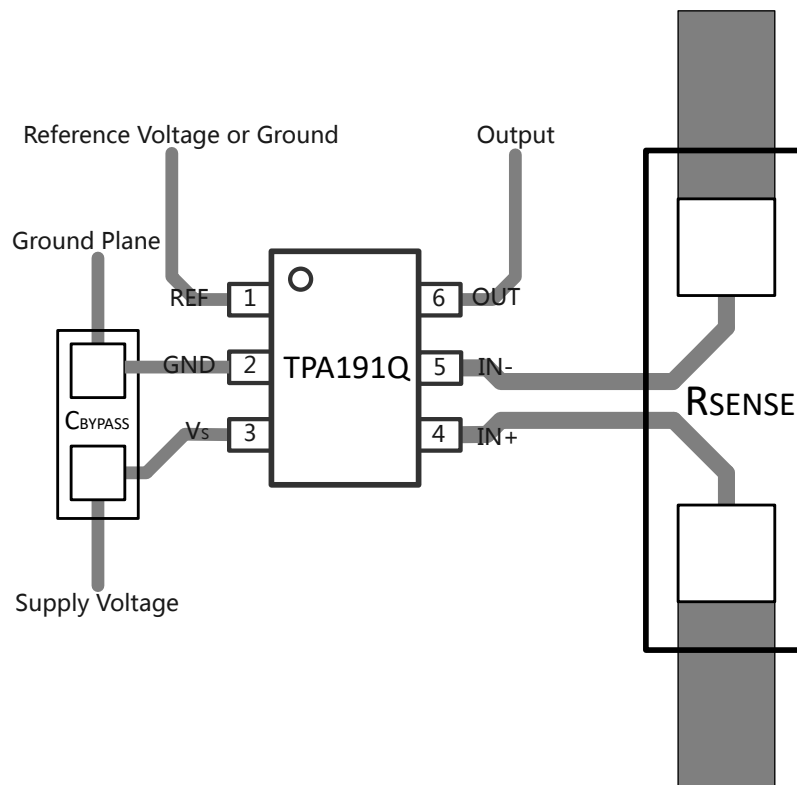


Figure 20. Recommended Layout

Tape and Reel Information

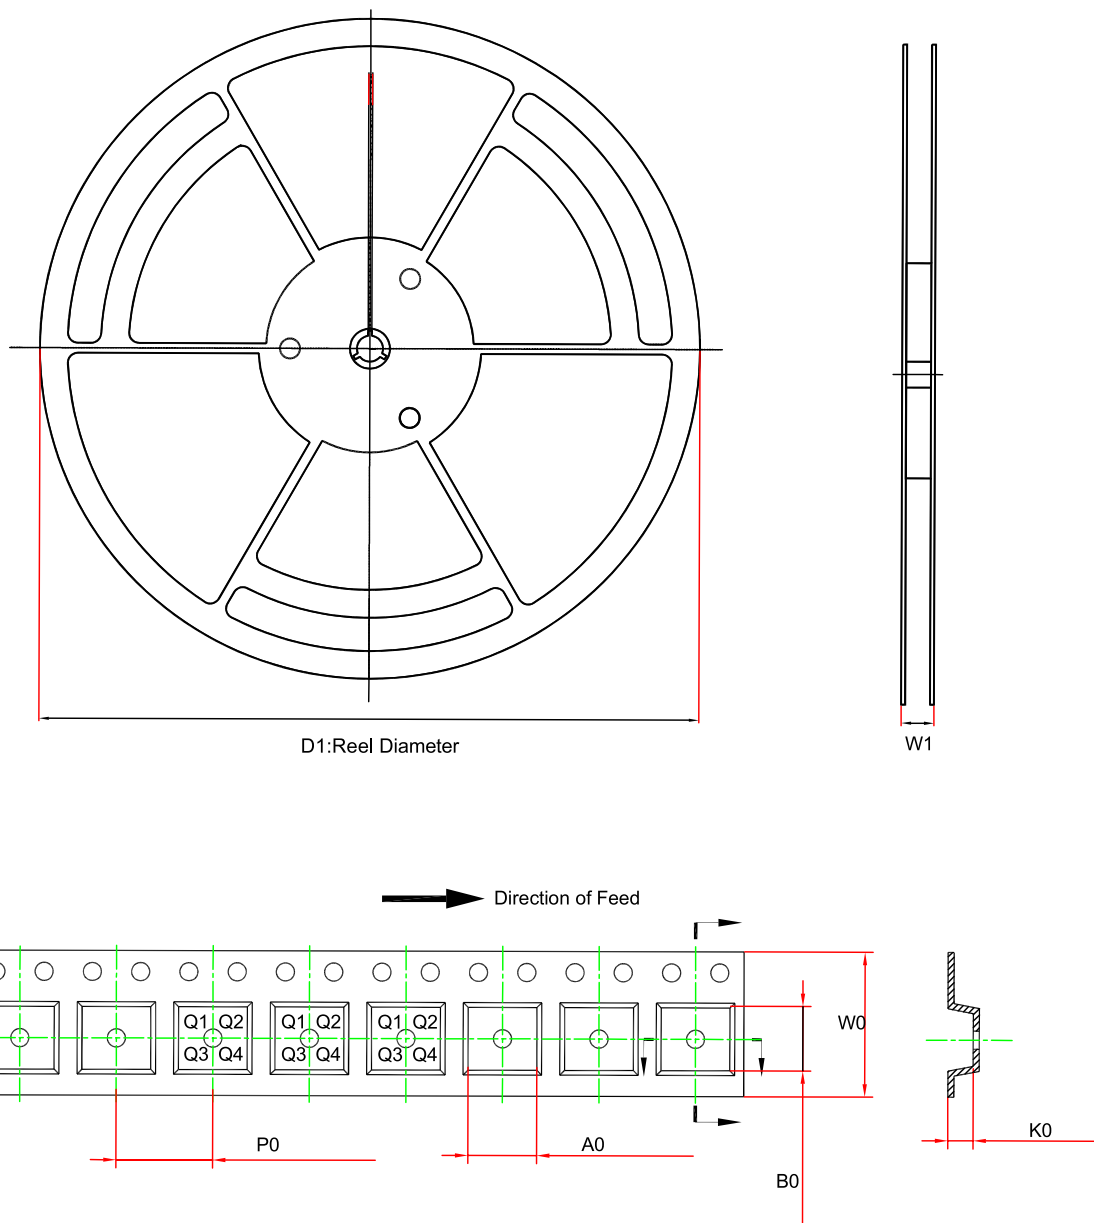

Order Number	Package	D1 (mm)	W1 (mm)	A0 (mm) ⁽¹⁾	B0 (mm) ⁽¹⁾	K0 (mm) ⁽¹⁾	P0 (mm)	W0 (mm)	Pin1 Quadrant
TPA191AxQ-SC6R-S	SOT363	178.0	12.1	2.4	2.5	1.2	4.0	8.0	Q3





(1) The value is for reference only. Contact the 3PEAK factory for more information.

Package Outline Dimensions

SOT363

Package Outline Dimensions

SC6(SOT363-6-A)

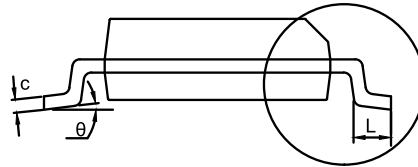

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.850	1.100	0.033	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.230	0.003	0.009
D	2.000	2.200	0.079	0.087
E	2.150	2.450	0.085	0.096
E1	1.150	1.350	0.045	0.053
e	0.650 BSC		0.026 BSC	
L	0.260	0.460	0.010	0.018
θ	0	8°	0	8°

NOTES

1. Do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

Order Information

Order Number	Gain Option	Operating Temperature Range	Package	Marking Information	MSL	Transport Media, Quantity	Eco Plan
TPA191A1Q-SC6R-S	20	-40 to 125°C	SOT363	1A1	MSL1	Tape and Reel, 3000	Green
TPA191A2Q-SC6R-S	50	-40 to 125°C	SOT363	1A2	MSL1	Tape and Reel, 3000	Green
TPA191A3Q-SC6R-S ⁽¹⁾	75	-40 to 125°C	SOT363	1A3	MSL1	Tape and Reel, 3000	Green
TPA191A4Q-SC6R-S	100	-40 to 125°C	SOT363	1A4	MSL1	Tape and Reel, 3000	Green
TPA191A5Q-SC6R-S	200	-40 to 125°C	SOT363	1A5	MSL1	Tape and Reel, 3000	Green
TPA191A6Q-SC6R-S ⁽¹⁾	500	-40 to 125°C	SOT363	1A6	MSL1	Tape and Reel, 3000	Green
TPA191A7Q-SC6R-S ⁽¹⁾	1000	-40 to 125°C	SOT363	1A7	MSL1	Tape and Reel, 3000	Green

(1) For future products, contact the 3PEAK factory for more information and samples.

Green: 3PEAK defines "Green" to mean RoHS compatible and free of halogen substances.

IMPORTANT NOTICE AND DISCLAIMER

Copyright© 3PEAK 2012-2024. All rights reserved.

Trademarks. Any of the 思瑞浦 or 3PEAK trade names, trademarks, graphic marks, and domain names contained in this document /material are the property of 3PEAK. You may NOT reproduce, modify, publish, transmit or distribute any Trademark without the prior written consent of 3PEAK.

Performance Information. Performance tests or performance range contained in this document/material are either results of design simulation or actual tests conducted under designated testing environment. Any variation in testing environment or simulation environment, including but not limited to testing method, testing process or testing temperature, may affect actual performance of the product.

Disclaimer. 3PEAK provides technical and reliability data (including data sheets), design resources (including reference designs), application or other design recommendations, networking tools, security information and other resources "As Is". 3PEAK makes no warranty as to the absence of defects, and makes no warranties of any kind, express or implied, including without limitation, implied warranties as to merchantability, fitness for a particular purpose or non-infringement of any third-party's intellectual property rights. Unless otherwise specified in writing, products supplied by 3PEAK are not designed to be used in any life-threatening scenarios, including critical medical applications, automotive safety-critical systems, aviation, aerospace, or any situations where failure could result in bodily harm, loss of life, or significant property damage. 3PEAK disclaims all liability for any such unauthorized use.