

Messrs. ONSTONE

# ALUMINUM ELECTROLYTIC CAPACITORS SPECIFICATION SHEET

---

CUSTOMER PART No.		
Rubycon PART No.	250 MXG 1500 M LCA LN 35X45	
DRAWING No.	REE - 046206	ISSUE No. 1
ISSUE DATE	17 June 2014	



RUBYCON CORPORATION  
ENGINEERING DIVISION


1938-1, NISHIMINOWA, INA-SHI, NAGANO-KEN, JAPAN  
TEL No. +81-265-72-7116  
FAX No. +81-265-73-3380

DESIGN	KAZUNORI OYABE
	<i>K. Oyabe</i>
CHECK	HIROKAZU HORIKAWA
	<i>H. Horikawa</i>
APPROVAL	YUZO SHIBA
	<i>Y. Shiba</i>

Fixed aluminum electrolytic capacitors for use in electronic equipment	Customer Part Number	
	Rubycon Part Number	250 MXG 1500 M LCA LN 35X45
	Style	CE692
	Operating Temperature Range	-40°C~+105°C
	The General Standard	JIS C 5141(1991)

## 1. Dimensions (unit:mm)

&lt; DIMENSIONS OF TERMINAL &gt;

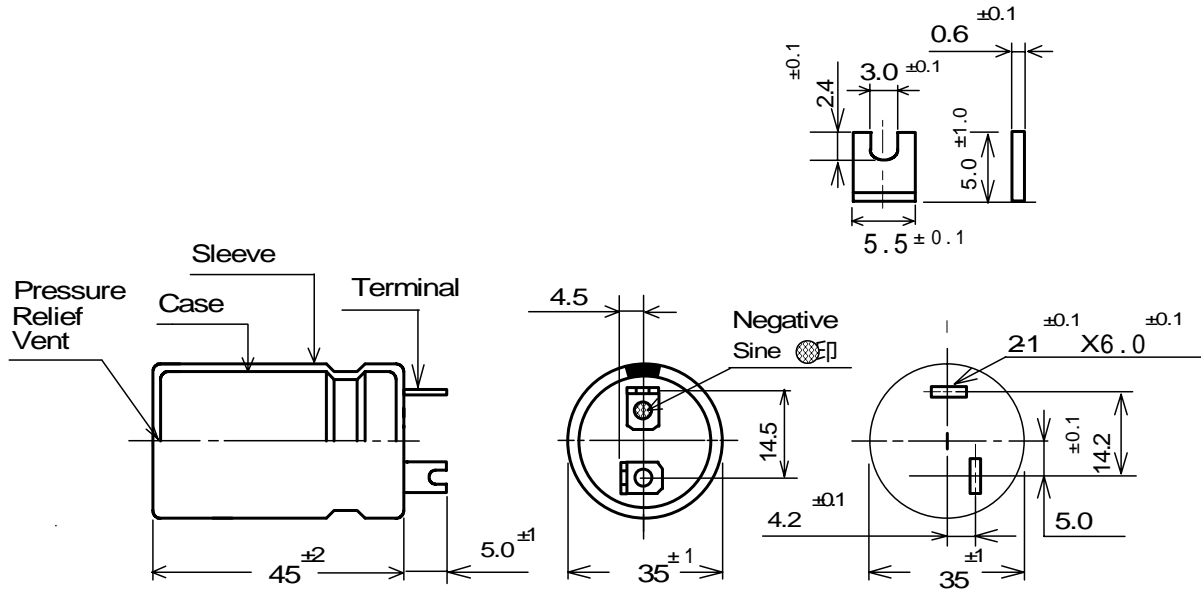

&lt; P.C. BOARD DIMENSIONS &gt;


Name	Sleeve	Case	Seal	Terminal
Material	P.E.T.	Al	Rubber-laminated bakelite	SPCC(Tin plating)
Appearance	Black			

## 2. Electrical Performance

Nominal Capacitance ( $\mu$ F)	Capacitance Tolerance (%)	Rated Voltage (V.DC)	Surge Voltage (V.DC)	Leakage Current Max./5min. ( $\mu$ A)	$\tan\delta$ Max.	Rated Ripple Current (A r.m.s.)
20°C/120Hz	20°C/120Hz			20°C	20°C/120Hz	105°C/120Hz
1500	-20 ~ +20	250	300	1837	0.20	3.28

3. Marking: Unless otherwise specified, capacitor shall be clearly marked on its body.

- (1) Brand
- (2) Mark Indicating Electrolytic Capacitor
- (3) Maximum Operating Temperature
- (4) Rated Voltage
- (5) Nominal Capacitance (Tolerance)
- (6) Series (Sleeve material)
- (7) Polarity
- (8) Lot No.

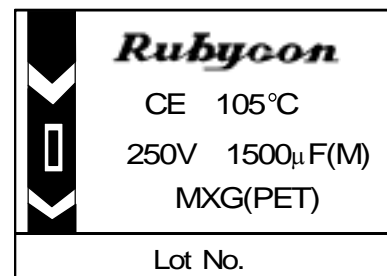

## 4. Temperature Characteristics (Impedance ratio at 120Hz)

- Z (-40°C)/Z (20°C): 15 MAX.  
 Z (-25°C)/Z (20°C): 4 MAX.

250 MXG 1500 M LCA LN 35X45	<b>Rubycon</b> RUBYCON CORPORATION	DRAWING No.	ISSUE No.
		REE - 046206	1

### 5. Load Life Test

After 3000 + 72/0 hours application of D.C. rated working voltage with full rated ripple current at  $105\pm 2^{\circ}\text{C}$ , the capacitor shall meet the following requirements.

Capacitance Change : Within  $\pm 20\%$  of the initial value  
 Dissipation Factor : Not more than 200% of the specified value  
 Leakage Current : Not more than the specified value

### 6. Notes (on the use of aluminum electrolytic capacitors)

#### (1) Charge and discharge

Do not use for a circuit where rapid charge and discharge is frequently repeated.

#### (2) Insulation

Aluminum electrolytic capacitors are covered with P.E.T. sleeve which purpose is mainly indication of necessary items.

The case of capacitor and the cathode terminal are not insulated.

#### (3) Polarity

Please confirm the polarity before use because this capacitor has polarity.

\*Guide to application except the above are described in our catalog and EIAJ RCR-2367C.

EIAJ RCR-2367C: "Safety Application Guide for fixed aluminum electrolytic capacitors for use in electronic equipment"

250 MXG 1500 M LCA LN 35X45	<b><i>Rubycon</i></b> RUBYCON CORPORATION	DRAWING No.	ISSUE No.
		REE - 046206	1