


LM29152/29302/29502/29752 High-Current Low-Dropout Regulators

Features

- High current capability
LM29150/29151/29152/29153——1.5A
LM29300/29301/29302/29303——3A
LM29500/29501/29502/29503——5A
LM29750/29751/29752——7.5A
- Low-dropout voltage
- Low ground current
- Accurate 1% guaranteed tolerance
- Extremely fast transient response
- Reverse-battery and “Load Dump” protection
- Zero-current shutdown mode (5-pin versions)
- Error flag signals output out-of-regulation (5-pin versions)
- Also characterized for smaller loads with industry- leading performance specifications
- Fixed voltage and adjustable versions

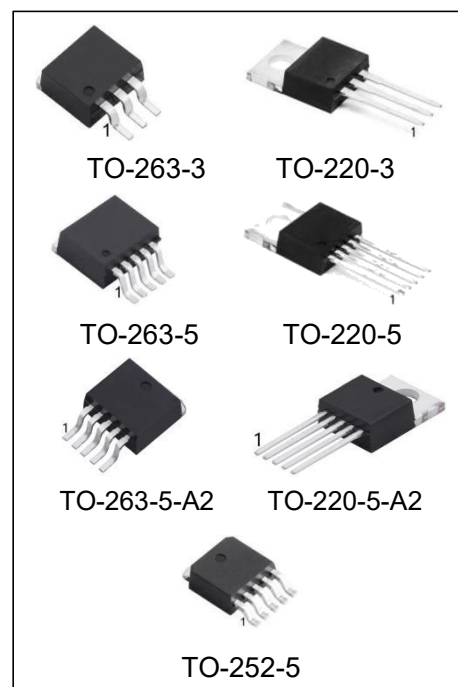

Applications

- Battery powered equipment
- High-efficiency “Green” computer systems
- Automotive electronics
- High-efficiency linear lower supplies
- High-efficiency lost-regulator for switching supply

General Description

The LM29150/29300/29500/29750 are high current, high accuracy, low-dropout voltage regulators. Using proprietary Super β PNP[®] process with a PNP pass element, these regulators feature 350mV to 425mV (full load) typical dropout voltages and very low ground current. Designed for high current loads, these devices also find applications in lower current, extremely low dropout-critical systems, where their tiny dropout voltage and ground current values are important attributes.

The LM29150/29300/29500/29750 are fully protected against overcurrent faults, reversed input polarity, reversed lead insertion, overtemperature operation, and positive and negative transient voltage spikes. Five pin fixed voltage versions feature logic level ON/OFF control and an error flag which signals whenever the output falls out of regulation. Flagged states include low input voltage (dropout), output current limit, overtemperature shutdown, and extremely high voltage spikes on the input.


On the 29xx1 and 29xx2, the ENABLE pin may be tied to VIN if it is not required for ON/OFF control. The LM29150/29300/29500 are available in 3-pin and 5-pin TO-220 and surface mount TO-263 (D2Pak) packages. The 29750 7.5A regulators are available in 3-pin and 5-pin. The 1.5A, adjustable output 29152 is available in a 5-pin power D-Pak (TO-252) package.

Ordering Information


DEVICE	Package Type	MARKING	Packing	Packing Qty
LM29150T-XX	TO-220-3	LM29150-XX	TUBE	1000pcs/box
LM29300T-XX	TO-220-3	LM29300-XX	TUBE	1000pcs/box
LM29500T-XX	TO-220-3	LM29500-XX	TUBE	1000pcs/box
LM29150S-XX/TR	TO-263-3	LM29150-XX	REEL	500pcs/reel
LM29300S-XX/TR	TO-263-3	LM29300-XX	REEL	500pcs/reel
LM29152DT/TR	TO-252-5	29152	REEL	2000pcs/reel
LM29151T-XX	TO-220-5/TO-220-5-A2	LM29151-XX	TUBE	1000pcs/box
LM29301T-XX	TO-220-5/TO-220-5-A2	LM29301-XX	TUBE	1000pcs/box
LM29501T-XX	TO-220-5/TO-220-5-A2	LM29501-XX	TUBE	1000pcs/box
LM29751T-XX	TO-220-5/TO-220-5-A2	LM29751-XX	TUBE	1000pcs/box
LM29151S-XX/TR	TO-263-5/TO-263-5-A2	LM29151-XX	REEL	500pcs/reel
LM29301S-XX/TR	TO-263-5/TO-263-5-A2	LM29301-XX	REEL	500pcs/reel
LM29501S-XX/TR	TO-263-5/TO-263-5-A2	LM29501-XX	REEL	500pcs/reel
LM29751S-XX/TR	TO-263-5/TO-263-5-A2	LM29751-XX	REEL	500pcs/reel
LM29152T	TO-220-5/TO-220-5-A2	LM29152	TUBE	1000pcs/box
LM29302AT	TO-220-5/TO-220-5-A2	LM29302A	TUBE	1000pcs/box
LM29502T	TO-220-5/TO-220-5-A2	LM29502	TUBE	1000pcs/box
LM29152S/TR	TO-263-5/TO-263-5-A2	LM29152	REEL	500pcs/reel
LM29302AS/TR	TO-263-5/TO-263-5-A2	LM29302A	REEL	500pcs/reel
LM29502S/TR	TO-263-5/TO-263-5-A2	LM29502	REEL	500pcs/reel
LM29153T	TO-220-5/TO-220-5-A2	LM29153	TUBE	1000pcs/box
LM29303T	TO-220-5/TO-220-5-A2	LM29303	TUBE	1000pcs/box
LM29503T	TO-220-5/TO-220-5-A2	LM29503	TUBE	1000pcs/box
LM29153S/TR	TO-263-5/TO-263-5-A2	LM29153	REEL	500pcs/reel
LM29303S/TR	TO-263-5/TO-263-5-A2	LM29303	REEL	500pcs/reel
LM29503S/TR	TO-263-5/TO-263-5-A2	LM29503	REEL	500pcs/reel

Notes: "xx" may be 1.5V, 1.8V, 2.5V, 3.3V, 5.0V.

Typical Application**

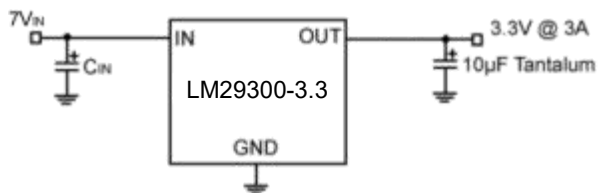


Fixed Output Voltage

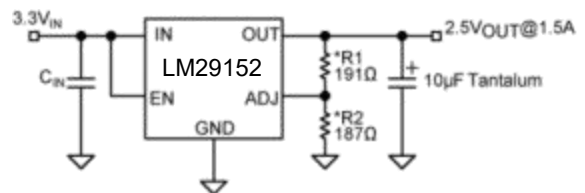


Adjustable Output Voltage
(*See Minimum Load Current Section)

Pin Configuration

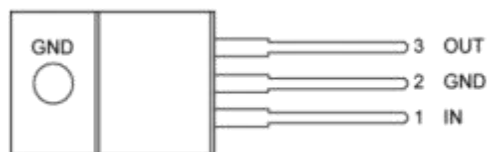

3-Pin TO-220
LM29150/29300/29500

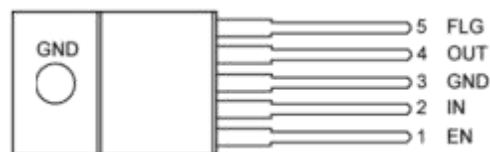


5-Pin TO-220 Fixed Voltage
LM29151/29301/29501/29751




5-Pin TO-220 Adjustable Voltage
LM29152/29302A/29502




5-Pin TO-220 Adjustable with Flag
LM29153/29303/29503

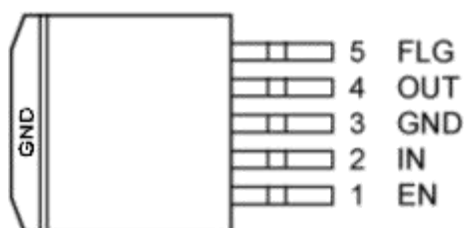


5-Pin TO-263 Fixed Voltage
LM29151/29301/29501

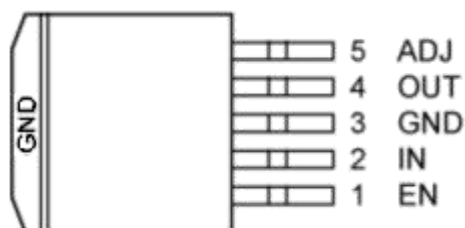


5-Pin TO-263 Adjustable Voltage
LM29302A/29502

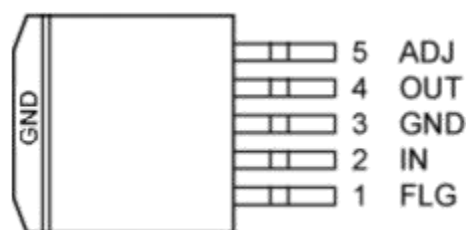

5-Pin TO-263 Adjustable with Flag
LM29153/29303/29503

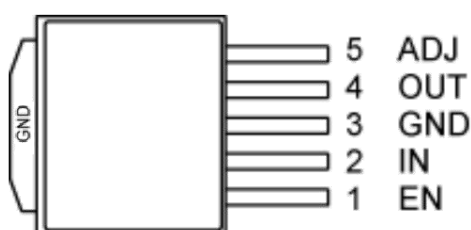

5-Pin TO-252 Adjustable Voltage
LM29152

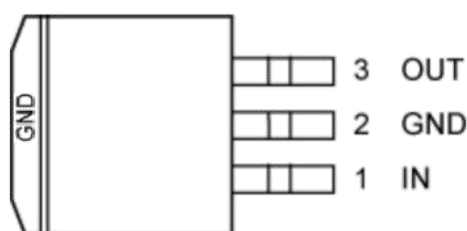

3-Pin TO-263
LM29150/29300

Pin Description

Pin Number TO-220 TO-263	Pin Name
1	INPUT: Supplies the current to the output power device
2	GND: TAB is also connected internally to the IC's ground on D-PAK.
3	OUTPUT: The regulator output voltage

Pin Description

Pin Number Fixed TO-220 TO-263	Pin Number Adjustable TO-220 TO-252 TO-263	Pin Number Adj. with Flag TO-220 TO-263	Pin Name
1	1	—	ENABLE: CMOS compatible control input. Logic high = enable, logic low = shutdown.
2	2	2	INPUT: Supplies the current to the output power device
3, TAB	3, TAB	3, TAB	GND: TAB is also connected internally to the IC's ground on D-PAK.
4	4	4	OUTPUT: The regulator output voltage
—	5	5	ADJUST: Adjustable regulator feedback input that connects to the resistorvoltage divider that is placed from OUTPUT to GND in order to set the output voltage.
5	—	1	FLAG: Active low error flag output signal that indicates an output fault condition

Absolute Maximum Ratings⁽¹⁾

Parameter	Value
Input Supply Voltage (V_{IN}) ⁽¹⁾	+26V
Enable Input Voltage (V_{EN})	-0.3V to V_{IN}
Lead Temperature (soldering, 10sec.)	TO-263/TO-220 245°C
	TO-252 260°C
Power Dissipation	Internally Limited
Storage Temperature Range	-65°C to +150°C
ESD Rating	Note 3

Operating Ratings⁽²⁾

Parameter	Value
Operating Junction Temperature	-40°C to +125°C
Maximum Operating Input Voltage	26 V
Package Thermal Resistance	
TO-220 (θ_{JC})	2°C/W
TO-263 (θ_{JC})	3°C/W
TO-252 (θ_{JC})	3°C/W
TO-263 (θ_{JA})	28°C/W
TO-252 (θ_{JA})	56°C/W

Electrical Characteristics

$V_{IN} = V_{OUT} + 1V$; $I_{OUT} = 10mA$; $T_J = 25^{\circ}C$, bold values indicate $-40^{\circ}C \leq T_J \leq +125^{\circ}C$, unless noted.

Parameter	Condition		Min	Typ	Max	Units
Output Voltage	I _{OUT} = 10mA		−1		1	%
	10mA ≤ I _{OUT} ≤ I _{FL} , (V _{OUT} + 1V) ≤ V _{IN} ≤26V ⁽⁵⁾		−2		2	%
Line Regulation	I _{OUT} = 10mA, (V _{OUT} + 1V) ≤ V _{IN} ≤26V			0.06	0.5	%
Load Regulation	V _{IN} = V _{OUT} + 5V, 10mA ≤ I _{OUT} ≤ 1.5A ^(5,9)			0.2	1	%
$\frac{\Delta V_o}{\Delta T}$	Output Voltage ⁽⁹⁾ Temperature Coefficient.			20	100	ppm/°C
Dropout Voltage	ΔV _{OUT} = -1%					
	LM29150	I _{OUT} = 100mA		80	200	mV
		I _{OUT} = 750mA		220		
		I _{OUT} = 1.5A		350	600	
	LM29300	I _{OUT} = 100mA		80	175	
		I _{OUT} = 1.5A		250		
		I _{OUT} = 3A		370	600	
	LM29500	I _{OUT} = 250mA		125	250	
		I _{OUT} = 2.5A		250		
		I _{OUT} = 5A		370	600	
	LM29750	I _{OUT} = 250mA		80	200	
		I _{OUT} = 4A		270		
		I _{OUT} = 7.5A		425	750	
Ground Current	LM29150	I _{OUT} = 750mA, V _{IN} = V _{OUT} + 1V		8	20	mA
		I _{OUT} = 1.5A		22		
	LM29300	I _{OUT} = 1.5A, V _{IN} = V _{OUT} + 1V		10	35	mA
		I _{OUT} = 3A		37		
	LM29500	I _{OUT} = 2.5A, V _{IN} = V _{OUT} + 1V		15	50	mA
		I _{OUT} = 5A		70		
	LM29750	I _{OUT} = 4A, V _{IN} = V _{OUT} + 1V		35	75	mA
	Note 8	I _{OUT} = 7.5A		120		
I _{GRNDDO} Ground Pin Current at Droupout	V _{IN} = 0.5V less than specified V _{OUT} × I _{OUT} = 10mA					
	LM29150			0.9		mA
	LM29300			1.7		mA
	LM29500			2.1		mA
	LM29750			3.1		mA
Current Limit	LM29150	V _{OUT} = 0V		2.1	3.5	A
	LM29300	V _{OUT} = 0V		4.5	5.0	A
	LM29500	V _{OUT} = 0V		7.5	10.0	A
	LM29750	V _{OUT} = 0V		9.5	15	A
Parameter	Condition		Min	Typ	Max	Units
e _n , Output Noise Voltage (10Hz to 100kHz) I _L = 100mA	C _L = 10μF			400		μV (rms)
	C _L = 33μF			260		
Ground Current in Shutdown	29150/1/2/3 only V _{EN} = 0.4V			2	10 30	μAμA
Reference	LM29xx2/29xx3					
Reference Voltage			1.228	1.240	1.252	V
			1.215		1.265	V
Reference Voltage			1.203		1.277	V
Adjust Pin Bias Current				40	80 120	nA


Reference Voltage Temperature Coefficient	(10)		20		ppm/°C
Adjust Pin Bias Current Temperature Coefficient			0.1		nA/°C
Flag Output (Error Comparator) LM29xx1/29xx3					
Output Leakage Current	$V_{OH} = 26V$		0.01	1.00 2.00	μA
Output Low Voltage	Device set for 5V, $V_{IN} = 4.5V$ $I_{OL} = 250\mu A$		220	300 400	mV
Upper Threshold Voltage	Device set for 5V ⁽¹¹⁾	40 25	60		mV
Lower Threshold Voltage	Device set for 5V ⁽¹¹⁾		75	95 140	mV
Hysteresis	Device set for 5V ⁽¹¹⁾		15		mV
ENABLE Input LM29xx1/29xx2					
Input Logic Voltage Low (OFF) High (ON)		2.4		0.8	V
Enable Pin Input Current	$V_{EN} = 26V$		100	600 750	μA
	$V_{EN} = 0.8V$	0.7		2 4	μA
Regulator Output Current in Shutdown	(12)		10	500	μA

Notes:


- Maximum positive supply voltage of 26V must be of limited duration (<100msec) and duty cycle ($\leq 1\%$). The maximum continuous supply voltage is 26V. Exceeding the absolute maximum rating may damage the device.
- The device is not guaranteed to function outside its operating rating. Operating Junction temperature range: $-40^{\circ}C$ to $+125^{\circ}C$. This product is designed for industrial grade applications. For automotive grade versions compliant with AEC-Q100, please conduct internal screening per the standard or contact our sales team for availability.
- Devices are ESD sensitive. Handling precautions recommended.
- Specification for packaged product only.
- Full load current (IFL) is defined as 1.5A for the LM29150, 3A for the LM29300, 5A for the LM29500, and 7.5A for the LM29750 families.
- Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its normal value with $V_{OUT} + 1V$ applied to V_{IN} .
- $V_{IN} = V_{OUT} (\text{nominal}) + 1V$. For example, use $V_{IN} = 4.3V$ for a 3.3V regulator or use 6V for a 5V regulator. Employ pulse-testing procedures to pin current.
- Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the load current plus the ground pin current.
- Output voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.
- Thermal regulation is defined as the change in output voltage at a time T after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a 200mA load pulse at $V_{IN} = 20V$ (a 4W pulse) for $T = 10ms$.
- Comparator thresholds are expressed in terms of a voltage differential at the Adjust terminal below the nominal reference voltage measured at 6V input. To express these thresholds in terms of output voltage change, multiply by the error amplifier gain = $V_{OUT}/V_{REF} = (R1 + R2)/R2$. For example, at a programmed output voltage of 5V, the Error output is guaranteed to go low when the output drops by $95mV \times 5V/1.240V = 384mV$. Thresholds remain constant as a percent of V_{OUT} as V_{OUT} is varied, with the dropout warning occurring at typically 5% below nominal, 7.7% guaranteed.
- $V_{EN} \leq 0.8V$ and $V_{IN} \leq 26V$, $V_{OUT} = 0$.
- When used in dual supply systems where the regulator load is returned to a negative supply, the output voltage must be diode clamped to ground.

Typical Characteristics LM2915x


2915x Dropout Voltage vs. Output Current

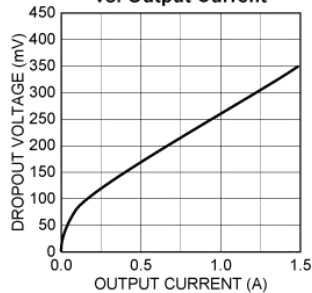


2915x Dropout Voltage vs. Temperature

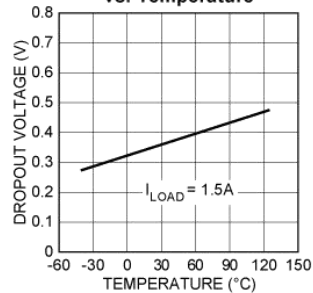


29150-5.0 Dropout Characteristics

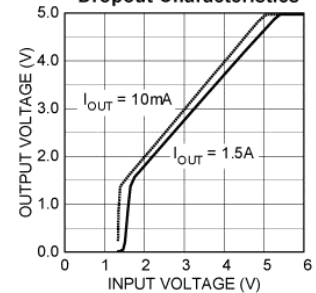


2915x Ground Current vs. Output Current

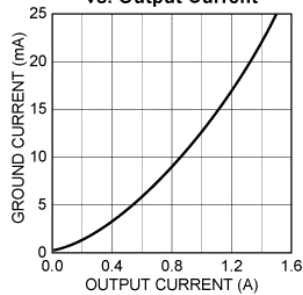


2915x Ground Current vs. Supply Voltage

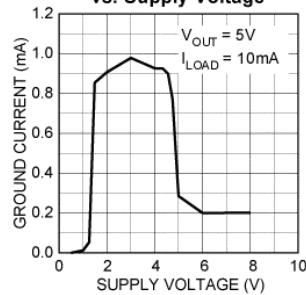


2915x Ground Current vs. Supply Voltage

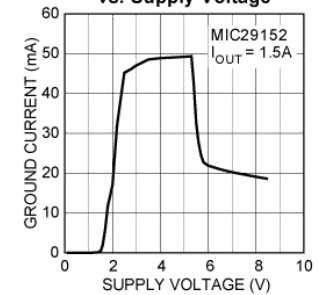


2915x Ground Current vs. Temperature

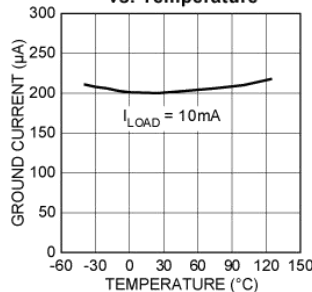


2915x Ground Current vs. Temperature

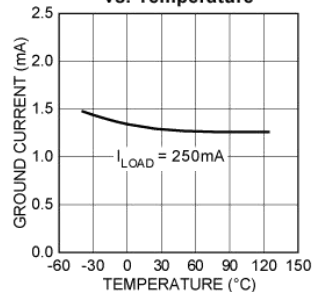


2915x Ground Current vs. Temperature

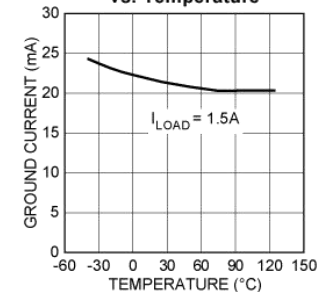


29150-3.3 Output Voltage vs. Temperature









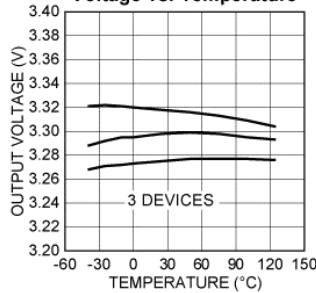


29150-3.3 Short Circuit Current vs. Temperature

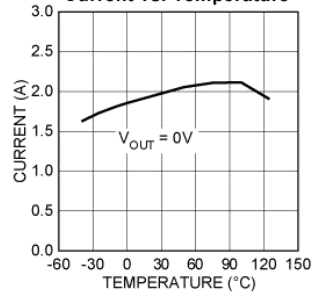


2915x Ground Current vs. Input Voltage

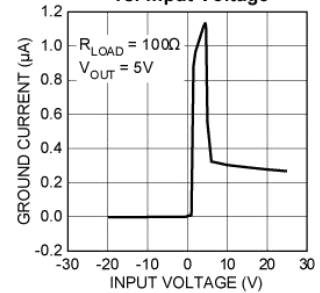

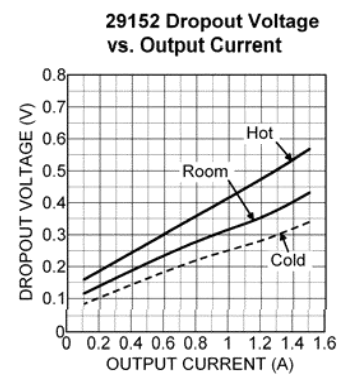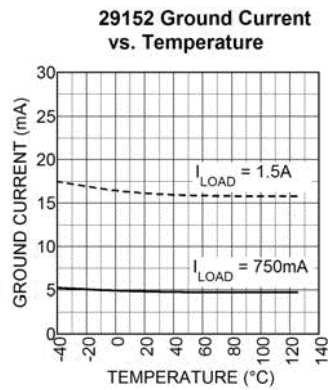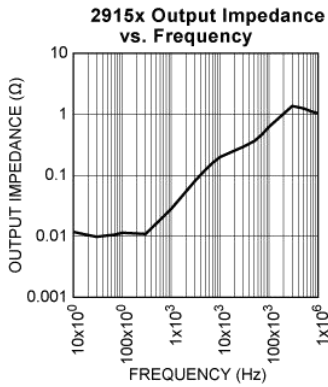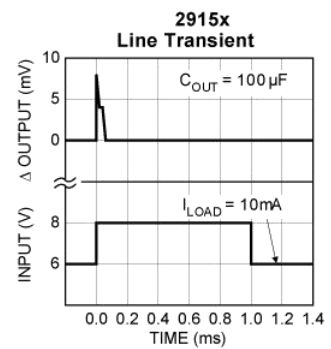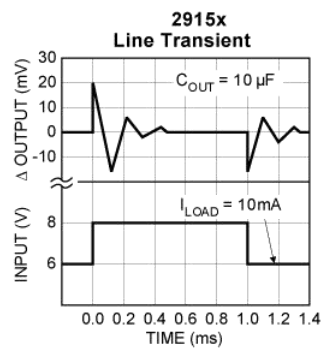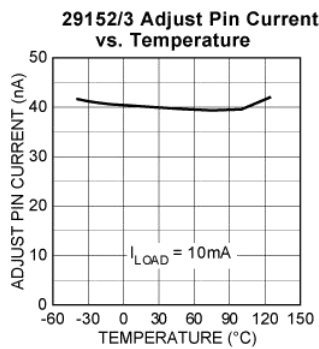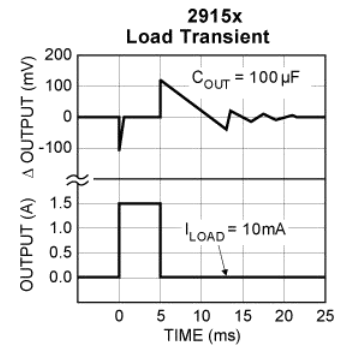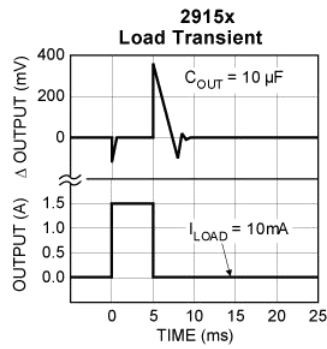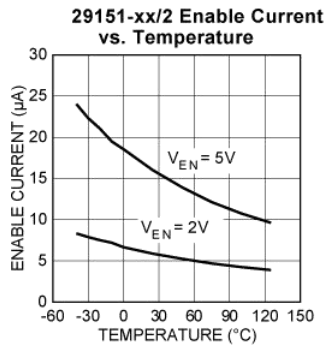


Typical Characteristics LM2930X


2930x Dropout Voltage vs. Output Current

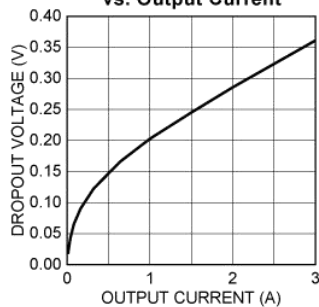


2930x Dropout Voltage vs. Temperature

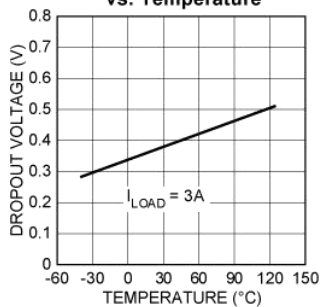


29300-3.3 Dropout Characteristics

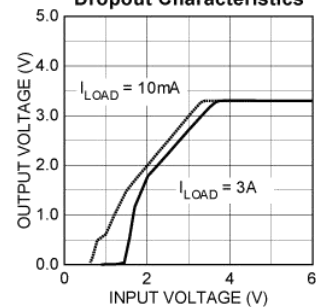


2930x Ground Current vs. Output Current

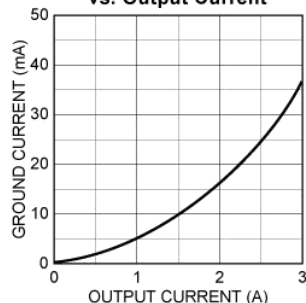


2930x Ground Current vs. Supply Voltage

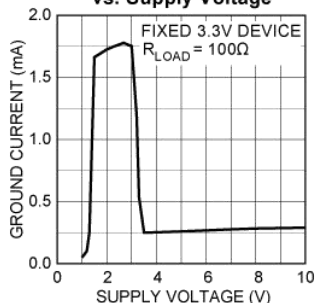


2930x Ground Current vs. Supply Voltage

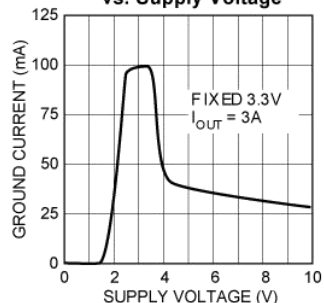


2930x Ground Current vs. Temperature

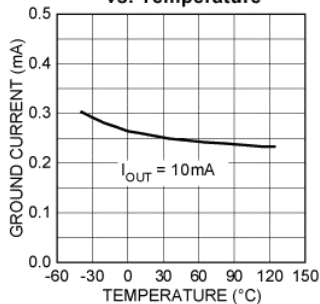


2930x Ground Current vs. Temperature

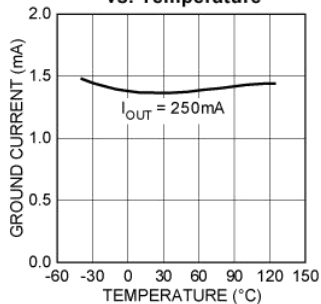


2930x Ground Current vs. Temperature

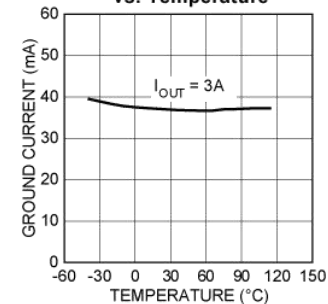


29300-3.3 Output Voltage vs. Temperature







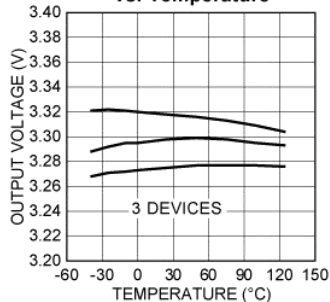


29300-5.0 Short Circuit Current vs. Temperature

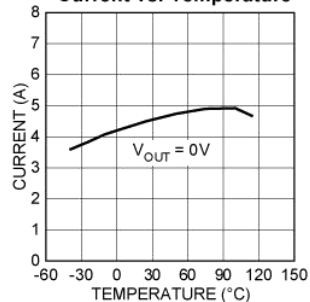


2930x Ground Current vs. Input Voltage

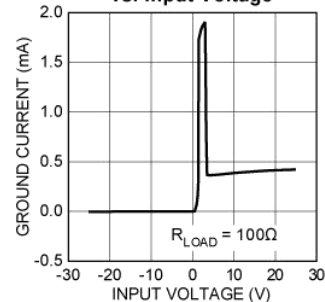

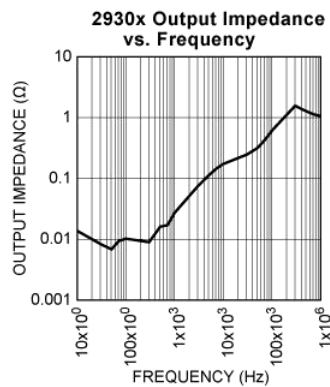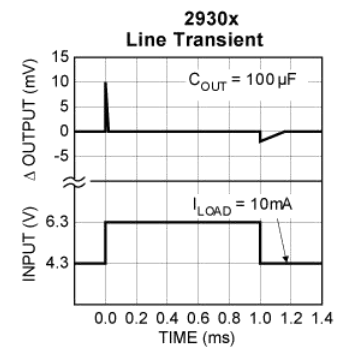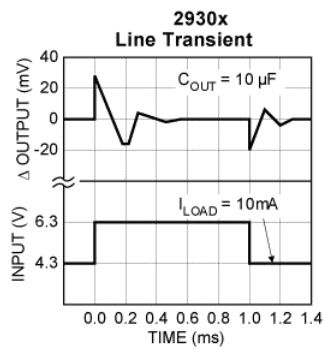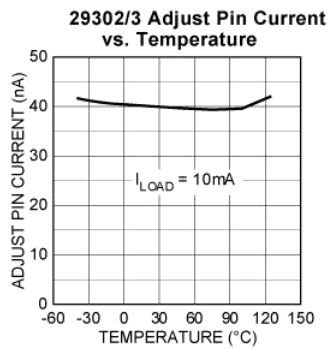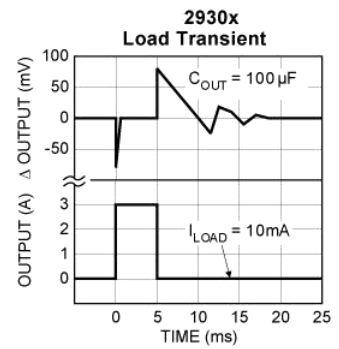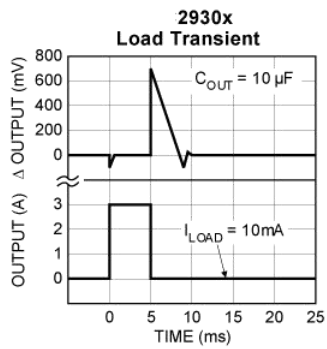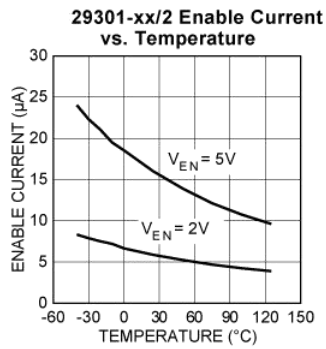


Typical Characteristics LM2950x


2950x Dropout Voltage vs. Output Current

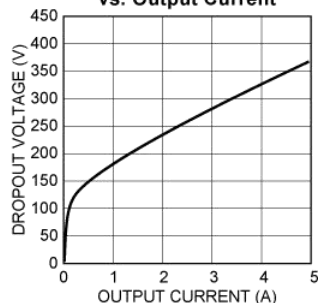


2950x Dropout Voltage vs. Temperature

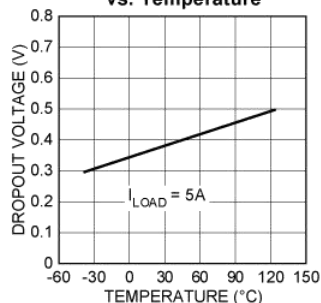


29500-3.3 Dropout Characteristics

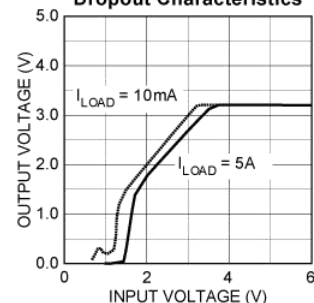


2950x Ground Current vs. Output Current

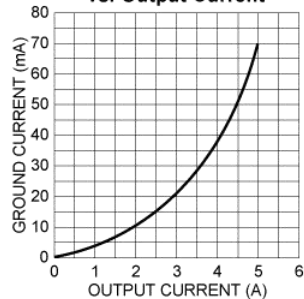


2950x Ground Current vs. Supply Voltage

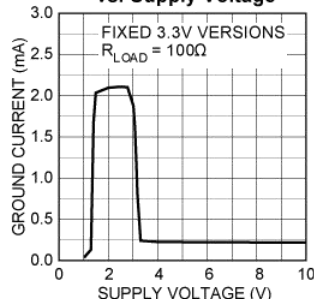


2950x Ground Current vs. Supply Voltage

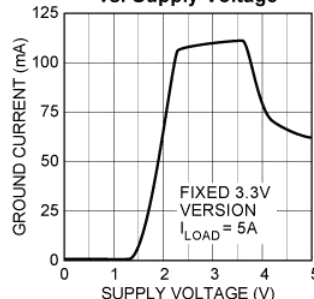


2950x Ground Current vs. Temperature

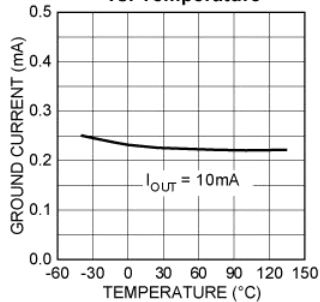


2950x Ground Current vs. Temperature

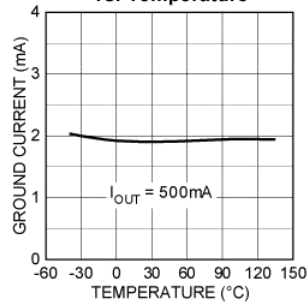


2950x Ground Current vs. Temperature

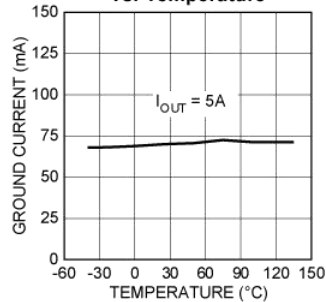


29500-3.3 Output Voltage vs. Temperature







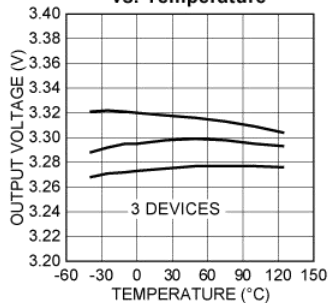


2950x-5.0 Short Circuit Current vs. Temperature












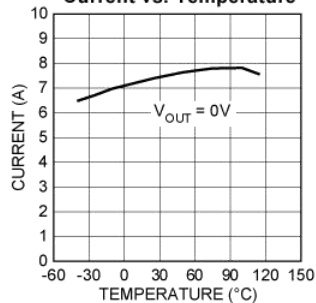









2950x Ground Current vs. Input Voltage

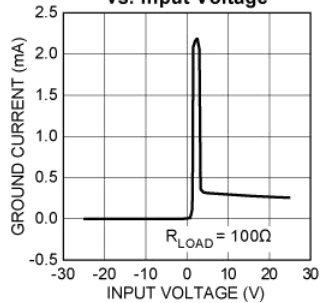

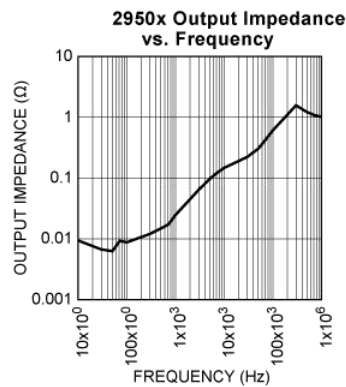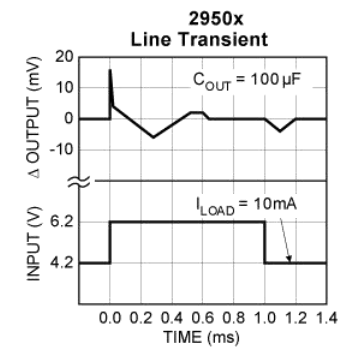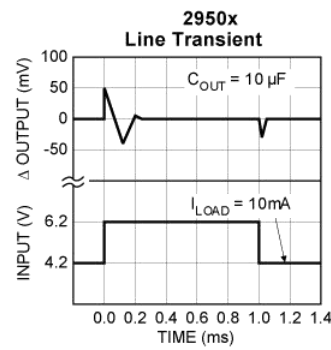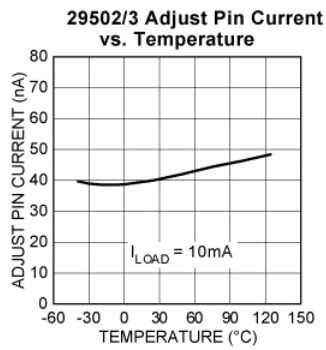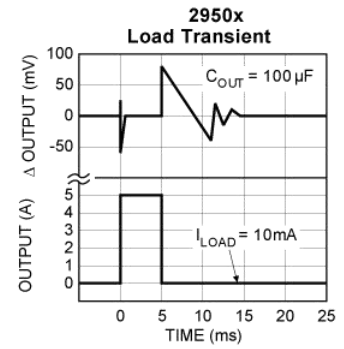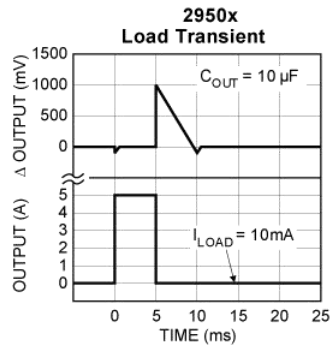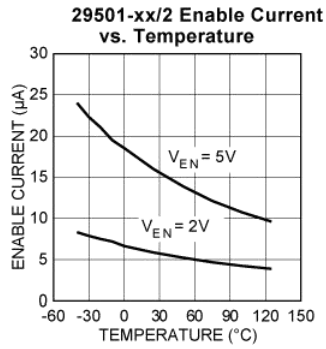


Typical Characteristics LM2975x

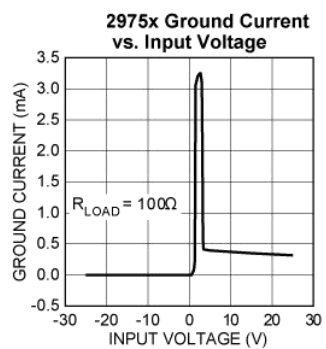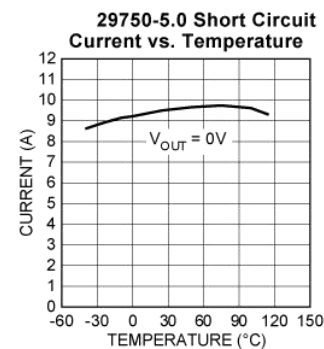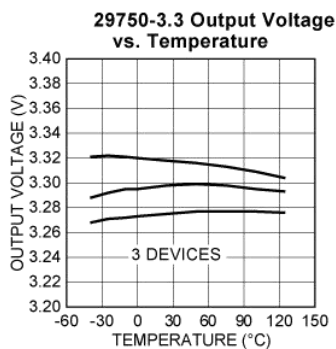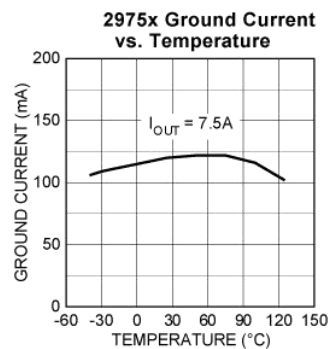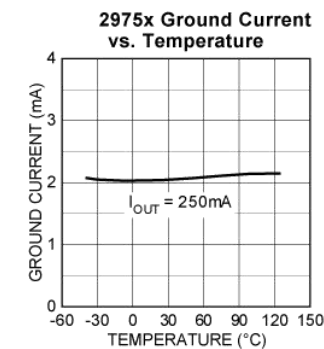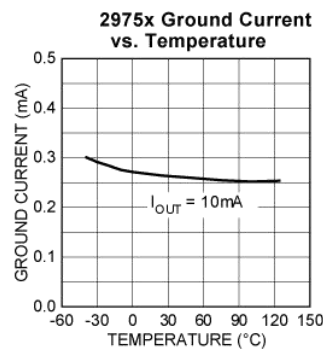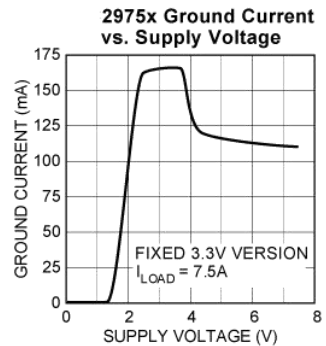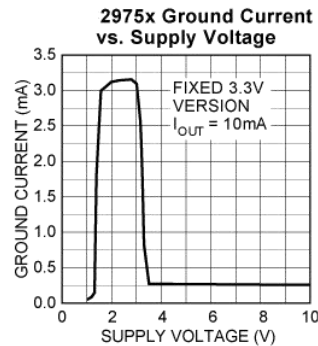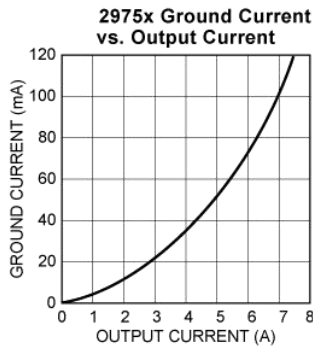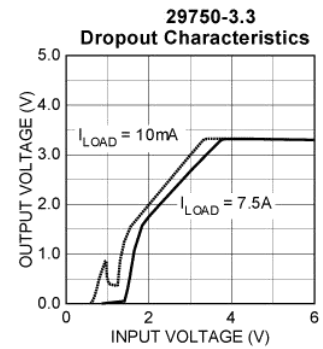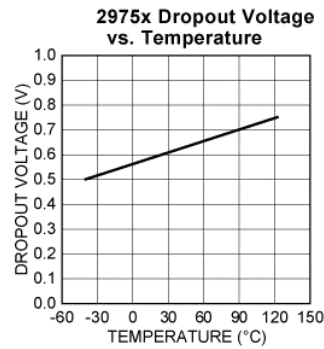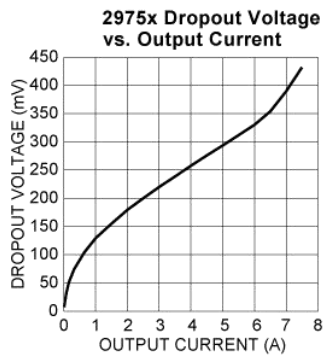

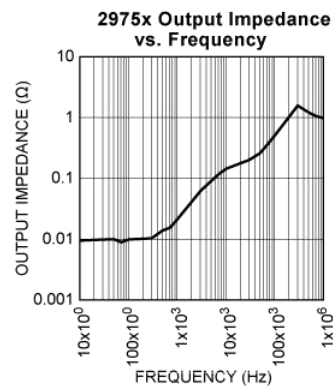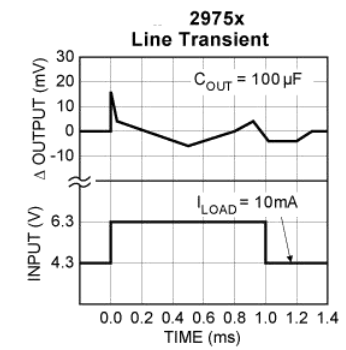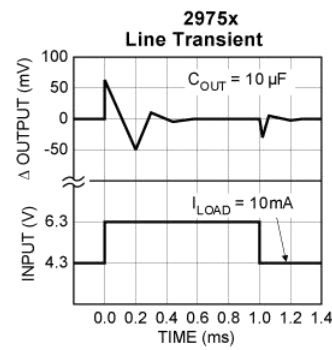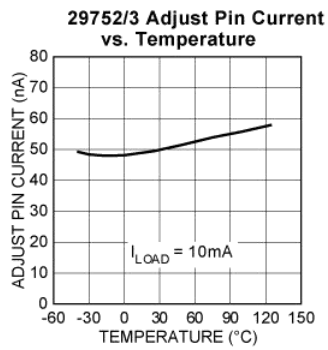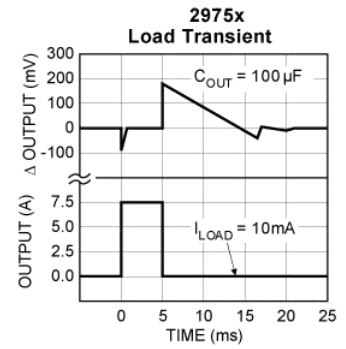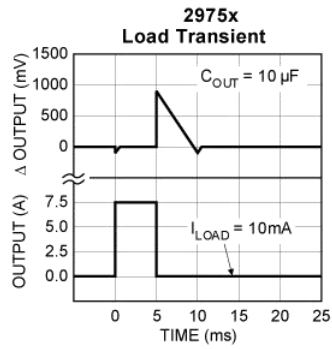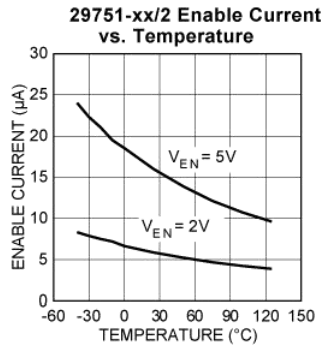

Functional Diagram

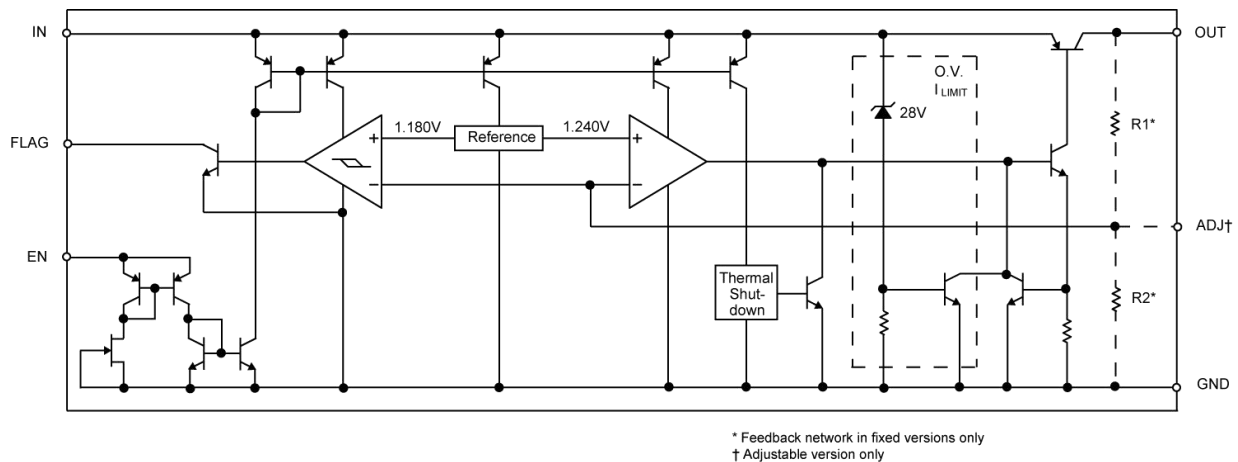

Application Information

The LM29150/29300/29500/29750 are high performance low-dropout voltage regulators suitable for all moderate to high-current voltage regulator applications. Their 350mV to 425mV typical dropout voltage at full load make them especially valuable in battery powered systems and as high efficiency noise filters in “post-regulator” applications. Unlike older NPN- pass transistor designs, where the minimum dropout voltage is limited by the base-emitter voltage drop and collector-emitter saturation voltage, dropout performance of the PNP output of these devices is limited merely by the low VCE saturation voltage.

A trade-off for the low-dropout voltage is a varying base driver requirement. But Super β PNP[®] process reduces this drive requirement to merely 1% of the load current.

The LM29150/29300/29500/29750 family of regulators are fully protected from damage due to fault conditions. Current limiting is provided. This limiting is linear; output current under overload conditions is constant. Thermal shutdown disables the device when the die temperature exceeds the 125°C maximum safe operating temperature. Transient protection allows device (and load) survival even when the input voltage spikes between +7V and +26V. When the input voltage exceeds about 20V to 26V, the over voltage sensor temporarily disables the regulator. The output structure of these regulators allows voltages in excess of the desired output voltage to be applied without reverse current flow. LM29xx1 and LM29xx2 versions offer a logic level ON/OFF control: when disabled, the devices draw nearly zero current.

An additional feature of this regulator family is a common pinout: a design’s current requirement may change up or down yet use the same board layout, as all of these regulators have identical pinouts.

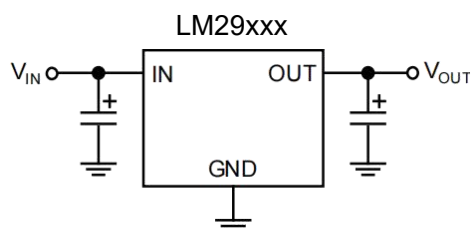


Figure 3. Linear regulators require only two capacitors for operation.

Thermal Design

Linear regulators are simple to use. The most complicated design parameters to consider are thermal characteristics. Thermal design requires the following application-specific parameters:

- Maximum ambient temperature, T_A
- Output Current, I_{OUT}
- Output Voltage, V_{OUT}
- Input Voltage, V_{IN}

First, we calculate the power dissipation of the regulator from these numbers and the device parameters from this datasheet.

$$P_D = I_{OUT}(1.01V_{IN} - V_{OUT})$$

Where the ground current is approximated by 1% of I_{OUT} . Then the heat sink thermal resistance is determined with this formula:

$$\theta_{SA} = \frac{T_{JMAX} - T_A}{P_D} - (\theta_{JC} + \theta_{CS})$$

Where $T_{JMAX} \leq 125^\circ\text{C}$ and θ_{CS} is between 0 and 2°C/W .

The heat sink may be significantly reduced in applications where the minimum input voltage is known and is large compared with the dropout voltage. Use a series input resistor to drop excessive voltage and distribute the heat between this resistor and the regulator. The low-dropout properties of Super Beta PNP® regulators allow very significant reductions in regulator power dissipation and the associated heat sink without compromising performance. When this technique is employed, a capacitor of at least $0.1\mu\text{F}$ is needed directly between the input and regulator ground.

Please refer to Application Note 9 and Application Hint 17 for further details and examples on thermal design and heat sink specification.

With no heat sink in the application, calculate the junction temperature to determine the maximum power dissipation that will be allowed before exceeding the maximum junction temperature of the 29152. The maximum power allowed can be calculated using the thermal resistance (θ_{JA}) of the D-Pak adhering to the following criteria for the PCB design: 2 oz. copper and 100mm^2 copper area for the 29152.

For example, given an expected maximum ambient temperature (T_A) of 75°C with $V_{IN} = 3.3\text{V}$, $V_{OUT} = 2.5\text{V}$, and $I_{OUT} = 1.5\text{A}$, first calculate the expected PD using Equation (1);

$$PD = (3.3\text{V} - 2.5\text{V})1.5\text{A} - (3.3\text{V})(0.016\text{A}) = 1.1472\text{W}$$

Next, calculate the junction temperature for the expected power dissipation.

$$T_J = (\theta_{JA} \times P_D) + T_A = (56^\circ\text{C/W} \times 1.1472\text{W}) + 75^\circ\text{C} = 139.24^\circ\text{C}$$

Now determine the maximum power dissipation allowed that would not exceed the IC's maximum junction temperature (125°C) without the use of a heat sink by $PD(\text{MAX}) = (T_J(\text{MAX}) - T_A) / \theta_{JA} = (125^\circ\text{C} - 75^\circ\text{C}) / (56^\circ\text{C/W}) = 0.893\text{W}$

Capacitor Requirements

For stability and minimum output noise, a capacitor on the regulator output is necessary. The value of this capacitor is dependent upon the output current; lower currents allow smaller capacitors.

This capacitor need not be an expensive low ESR type: aluminum electrolytics are adequate. In fact, extremely low ESR capacitors may contribute to instability. Tantalum capacitors are recommended for systems where fast load transient response is important.

Where the regulator is powered from a source with a high AC impedance, a $0.1\mu\text{F}$ capacitor connected between Input and GND is recommended. This capacitor should have good characteristics to above 250kHz .

Minimum Load Current

The LM29150–29750 regulators are specified between finite loads. If the output current is too small, leakage currents dominate and the output voltage rises. The following minimum load current swamps any expected leakage current across the operating temperature range:

Device	Minimum Load
29150	5mA
29300	7mA
29500	10mA
29750	10mA

Adjustable Regulator Design

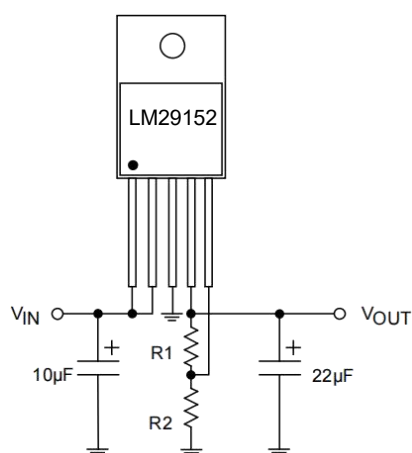


Figure 4. Adjustable Regulator with Resistors

The adjustable regulator versions, LM29xx2 and LM29xx3, allow programming the output voltage anywhere between 1.25V and the 25V. Two resistors are used. The resistor values are calculated by:

$$R_1 = R_2 \times \left(\frac{V_{OUT}}{1.240} - 1 \right)$$

where V_{OUT} is the desired output voltage. Figure 4 shows component definition. Applications with widely varying load currents may scale the resistors to draw the minimum load current required for proper operation (see “Minimum Load Current” section).

Error Flag


LM29xx1 and LM29xx3 versions feature an Error Flag, which looks at the output voltage and signals an error condition when this voltage drops 5% below its expected value. The error flag is an open-collector output that pulls low under fault conditions. It may sink 10mA. Low output voltage signifies a number of possible problems, including an overcurrent fault (the device is in current limit) and low input voltage. The flag output is inoperative during overtemperature shutdown conditions.

Enable Input

LM29xx1 and LM29xx2 versions feature an enable (EN) input that allows ON/OFF control of the device. Special design allows “zero” current drain when the device is disabled—only microamperes of leakage current flows. The EN input has TTL/CMOS compatible thresholds for simple interfacing with logic, or may be directly tied to $\leq 26V$. Enabling the regulator requires approximately 20µA of current.


Physical Dimensions

TO-263-5

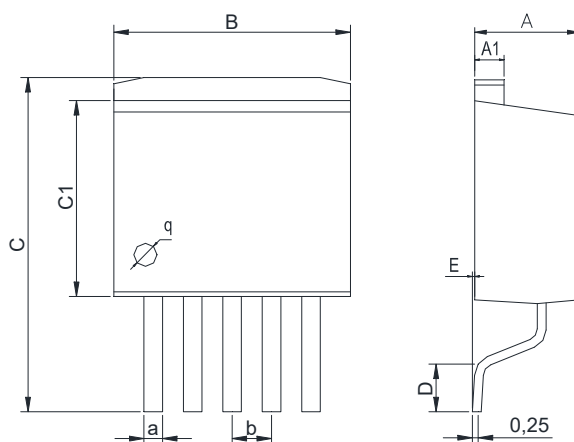

Dimensions In Millimeters(TO-263-5)									
Symbol:	A	A1	B	C	C1	D	E	a	b
Min:	4.45	1.22	10	13.7	8.40	1.90	0	0.71	1.70BSC
Max:	4.62	1.32	10.4	14.6	8.90	2.10	0.20	0.97	


TO-220-5

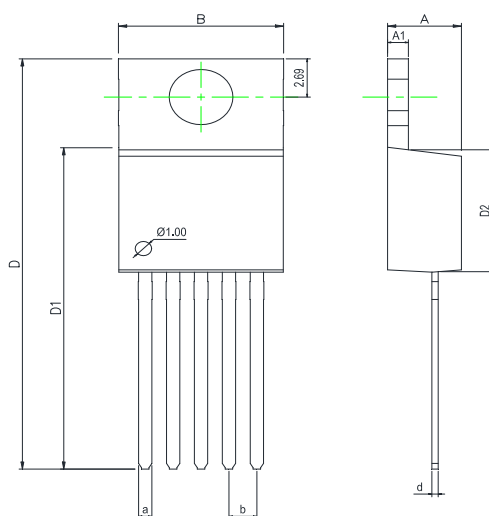

Dimensions In Millimeters(TO-220-5)									
Symbol:	A	A1	B	D	D1	D2	a	d	b
Min:	4.52	1.25	10	28.2	22.4	8.69	0.71	0.33	1.70BSC
Max:	4.62	1.29	10.3	28.9	22.6	8.79	0.97	0.42	

Physical Dimensions


TO-263-5-A2

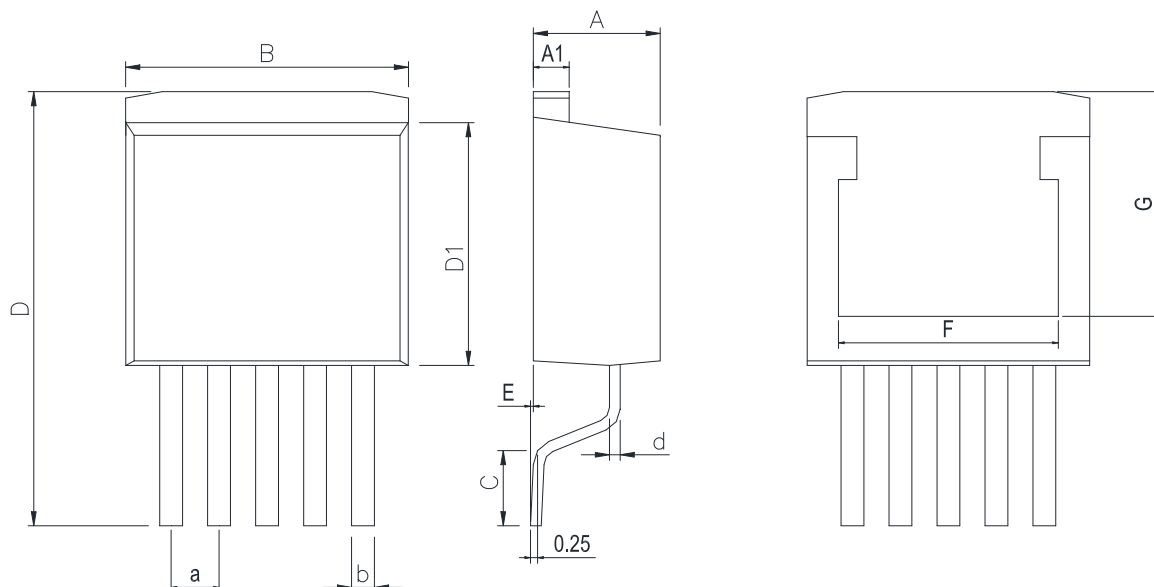

Dimensions In Millimeters(TO-263-5-A2)

Symbol:	A	A1	B	C	D	D1	E	a	b	F	G
Min:	4.40	1.25	9.80	2.10	14.7	8.50	0	0.71	0.71	7.80TYP	7.97TYP
Max:	4.60	1.30	10.4	2.60	15.6	9.10	0.30	0.91	0.91		

TO-220-5 (A2)

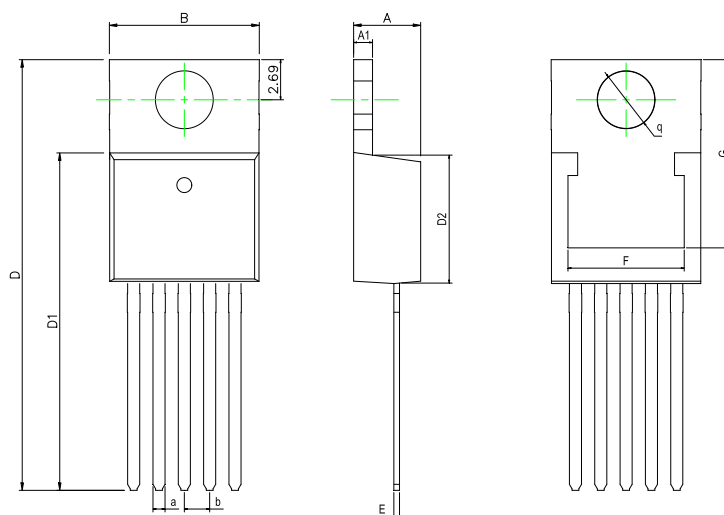


Dimensions In Millimeters(TO-220-5)

Symbol:	A	A1	B	D	D1	D2	E	F	G	a	b	q
Min:	4.40	1.22	9.8	28.5	22.4	8.50	0.33	7.70	12.55	0.71	1.70	3.80
Max:	4.60	1.32	10.4	28.9	22.7	9.10	0.43	7.90	12.65	0.97	BSC	TYP


Physical Dimensions

TO-263-3

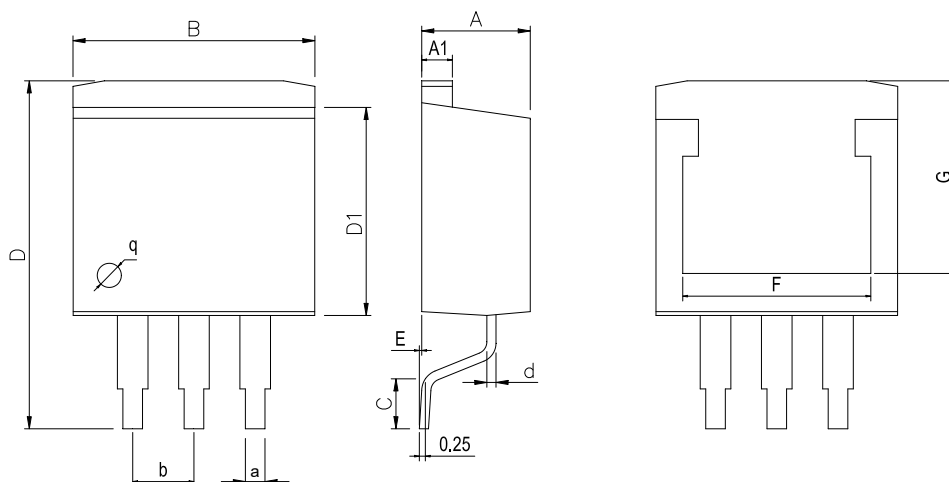

Dimensions In Millimeters(TO-263-3)											
Symbol:	A	A1	B	C	D	D1	E	F	G	a	b
Min:	4.45	1.22	10	1.89	14.1	8.38	0	7.20	7.20	0.71	2.54BSC
Max:	4.62	1.32	10.4	2.19	15.3	8.89	0.305	8.10	8.10	0.97	


TO-220-3

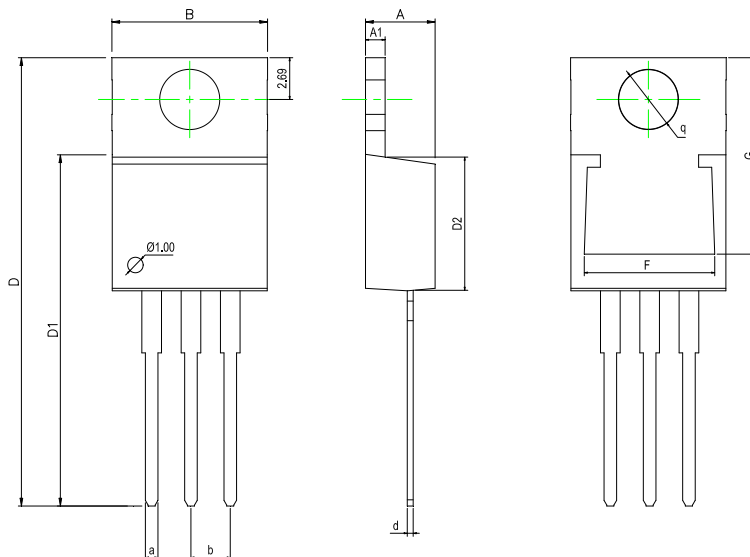

Dimensions In Millimeters(TO-220-3)												
Symbol:	A	A1	B	D	D1	D2	F	G	a	d	b	q
Min:	4.45	1.22	10	28.2	22.22	8.50	8.30	12.55	0.71	0.33	2.54	3.80
Max:	4.62	1.32	10.4	28.9	22.62	9.10	8.55	12.75	0.97	0.42	BSC	TYP

Physical Dimensions

TO-252-5

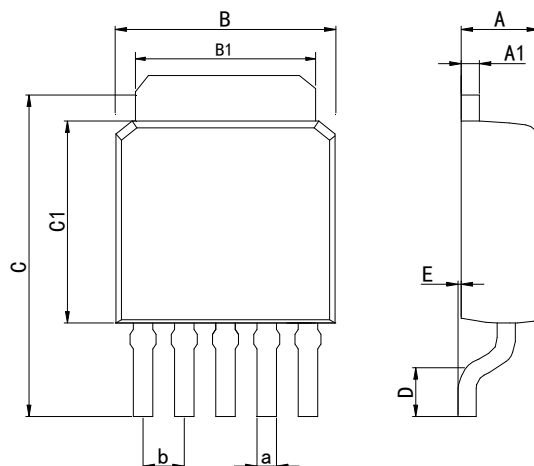

Dimensions In Millimeters(TO-252-5)										
Symbol:	A	A1	B	B1	C	C1	D	E	a	b
Min:	2.10	0.45	6.40	5.10	9.20	5.30	0.90	0	0.50	1.27
Max:	2.50	0.70	6.80	5.50	10.6	6.30	1.75	0.23	0.80	BSC

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2018-8	New	1-24
V1.1	2021-7	Update encapsulation type、Update Pin Configuration	1、 3
V1.2	2024-11	Update Lead Temperature	4
V1.3	2025-10	Update TO-263-3 Physical Dimensions、Update important statements	20、 23

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.