



GENERAL DESCRIPTION

HT72XX series are a set of Low technology. They can withstand voltage 10V. And they are available with low voltage drop and low quiescent current widely used in audio, video and communication appliances.

FEATURES


- Low Power Consumption
- Low Voltage Drop
- Low Temperature Coefficient
- Withstanding Voltage 10V
- Quiescent Current 2.0μA
- Output Voltage Accuracy: tolerance
- ±2% High output current: 300mA

TYPICAL APPLICATIONS

- Battery-powered Equipments
- Communication Equipments
- Audio/Video Equipments

PIN CONFIGURATION

SOT-89



PIN DESCRIPTION

PIN No.	Name	Functions Description
1	ADJ	Adjustable
2	V _{IN}	Input Voltage
3	V _{OUT}	Output Voltage

ABSOLUTE MAXIMUM RATINGS

Description	Symbol	Value range	Unit
Limit Power Voltage	V _{IN}	-0.3 ~ +12	V
Storage Temperature Range	T _{STG}	-50 ~ +125	°C
Operating Free-air Temperature Range	T _A	-40 ~ +85	°C

Note: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

HEAT DISSIPATION


Description	Symbol	Value range	Unit
Thermal resistance	θ _{JA}	200	°C/W
Power dissipation	P _W	500	mW



OUTPUT

Series	Output	Package
HT7228	2.8V	SOT-89
HT7230	3.0V	
HT7233	3.3V	
HT7236	3.6V	
HT7250	5.0V	

FUNCTIONAL BLOCK DIAGRAM

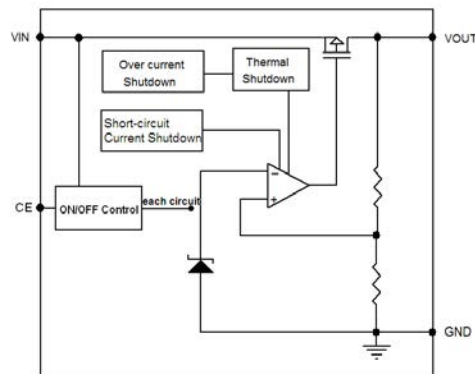

DC CHARACTERISTICS(unless otherwise noted $T_A=+25^{\circ}\text{C}$)

($V_{IN}=V_{OUT}+2\text{V}$, $V_{CE}=V_{IN}$, $C_{IN}=C_L=10\mu\text{F}$, $T_a=25^{\circ}\text{C}$, unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT(E)}$ (Note 2)	$I_{OUT}=10\text{mA}$, $V_{IN}=V_{OUT}+2\text{V}$	X 0.98	$V_{OUT(T)}$ (Note 1)	X 1.02	V
Maximum Output Current	I_{OUTMAX}	$V_{IN}=V_{OUT}+2\text{V}$		300		mA
Load Regulation	ΔV_{OUT}	$V_{IN}=V_{OUT}+2\text{V}$, $1\text{mA}\leq I_{OUT}\leq 300\text{mA}$		37		mV
Dropout Voltage (Note 1)	V_{DIF1}	$I_{OUT}=100\text{mA}$		180		mV
	V_{DIF2}	$I_{OUT}=200\text{mA}$		260		mV
Supply Current	I_{SS}	$V_{IN}=V_{OUT}+2\text{V}$		2		μA
Stand-by Current	I_{CEL}	$V_{CE}=0\text{V}$		0		μA
Line Regulation	ΔV_{OUT}	$I_{OUT}=30\text{mA}$ $V_{OUT}+2\text{V}\leq V_{IN}\leq 10\text{V}$		0.2		%/V
CE "High" Voltage	V_{CEH}	Start up	1.20			V
CE "Low" Voltage	V_{CEL}	Shut down			0.8	V
Short-circuit Current	I_{SHORT}	$V_{OUT}=0\text{V}$		200		mA
Thermal Shutdown Protection	T_{sd}	$I_{OUT}=10\text{mA}$, $V_{IN}=V_{OUT}+2\text{V}$		100		$^{\circ}\text{C}$



FUNCTIONAL DESCRIPTION

1. Input Bypass Capacitor

An input capacitor is recommended. A 10uF tantalum on the input is a suitable input bypassing for almost all applications.

2. Output Capacitor

The output capacitor is critical in maintaining regulator stability, and must meet the required conditions for both minimum amount of capacitance and ESR (Equivalent Series Resistance). The minimum output capacitance required by the HT72XX is 10 μ F, if a tantalum capacitor is used. Any increase of the output capacitance will merely improve the loop stability and transient response. The ESR of the output capacitor should be less than 0.5 Ω .

3. Load Regulation

The HT72XX regulates the voltage that appears between its output and ground pins, or between its output and adjust pins. In some cases, line resistances can introduce errors to the voltage across the load. To obtain the best load regulation, a few precautions are needed. Figure1, shows a typical application using a fixed output regulator. The R_{t1} and R_{t2} are the line resistances. It is obvious that the V_{LOAD} is less than the V_{OUT} by the sum of the voltage drops along the line resistances. In this case, the load regulation seen at the degraded from the datasheet specification. To improve this, the load should be tied directly to R_{LOAD} would be the output terminal on the positive side and directly tied to the ground terminal on the negative side.


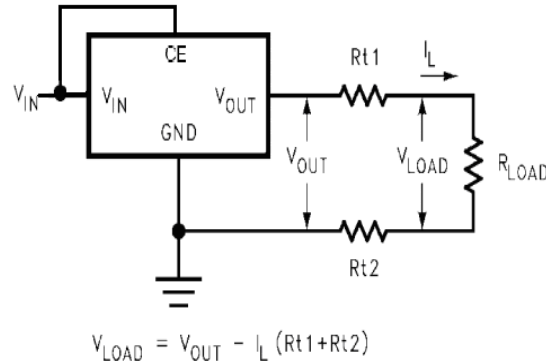


FIGURE 1. Typical Application using Fixed Output Regulator



PACKAGE INFORMATION

SOT-89

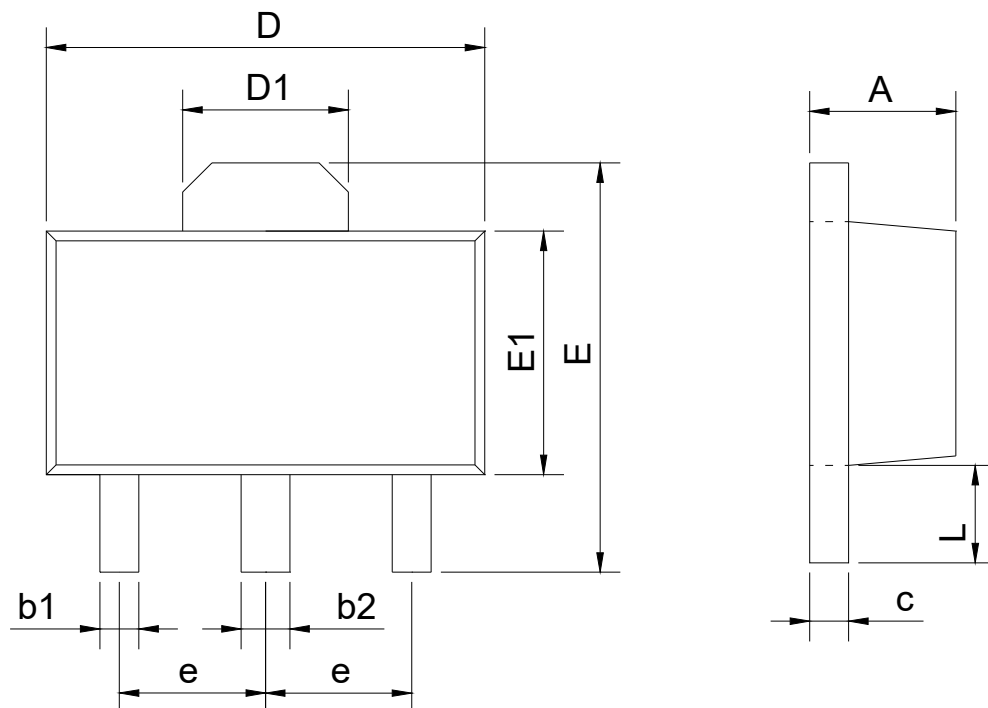

SYMBOL	mm	
	min	max
A	1.40	1.60
b1	0.35	0.50
b2	0.45	0.60
c	0.36	0.46
D	4.30	4.70
D1	1.40	1.80
E	4.00	4.40
E1	2.30	2.70
e	1.50BSC	
L	0.80	1.20



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.