


FEATURES


- Low current.(max.100mA).
- Low voltage..



SOT-23

APPLICATIONS

- General purpose switching and amplification.



ORDERING INFORMATION


Type No.	Marking	Package Coed
BC856A/B	3A/3B	SOT-23
BC857A/B/C	3E/3F/3G	SOT-23
BC858A/B/C	3J/3K/3L	SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter		Value	Units
V _{CBO}	Collector-Base Voltage	BC856	-80	V
		BC857	-50	
		BC858	-30	
V _{CEO}	Collector-Emitter Voltage	BC856	-65	V
		BC857	-45	
		BC858	-30	
V _{EBO}	Emitter-Base Voltage		-5	V
I _C	Collector Current -Continuous		-0.1	A
P _C	Collector Dissipation		250	mW
T _j , T _{stg}	Junction and Storage Temperature		-65 to +150	°C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage BC856 BC857 BC858	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-80 -50 -30			V
Collector-emitter breakdown voltage BC856 BC857 BC858	$V_{(BR)CEO}$	$I_C = -10mA, I_B = 0$	-65 -45 -30			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -1\mu A, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -30V, I_E = 0$		-1	-15	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5V, I_C = 0$			-0.1	μA
DC current gain BC856A,857A,858A BC856B,857B,858B BC857C,858C	h_{FE}	$V_{CE} = -5V, I_C = -2mA$	125 220 420		250 475 800	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -100mA, I_B = -5mA$ $I_C = -10mA, I_B = -0.5mA$			-0.65 -0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -10mA, I_B = -0.5mA$ $I_C = -100mA, I_B = -5mA$		-0.7 -0.85		V
Base-emitter voltage	$V_{BE(on)}$	$I_C = -2mA, V_{CE} = -5V$ $I_C = -10mA, V_{CE} = -5V$	-0.6	-0.65	-0.75 -0.82	V
collector capacitance	C_c	$V_{CB} = -10V, I_E = I_C = 0$ $f = 1MHz$		4.5		pF
Transition frequency	F	$I_C = -200\mu A, V_{CE} = -5V,$ $R_S = 2k\Omega, f = 1kHz,$ $B = 200Hz$		2	10	dB
Transition frequency	f_T	$V_{CE} = -5V, I_C = -10mA$ $f = 100MHz$	100			MHz

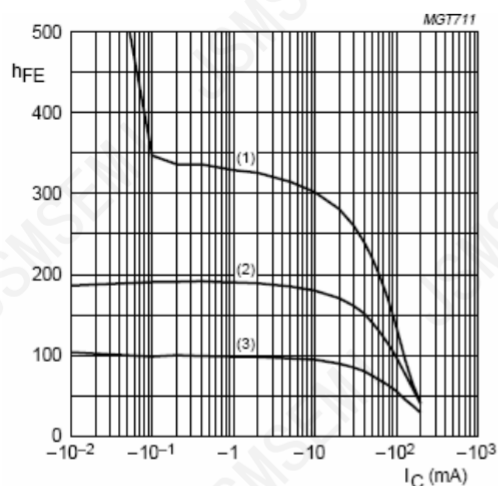TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified


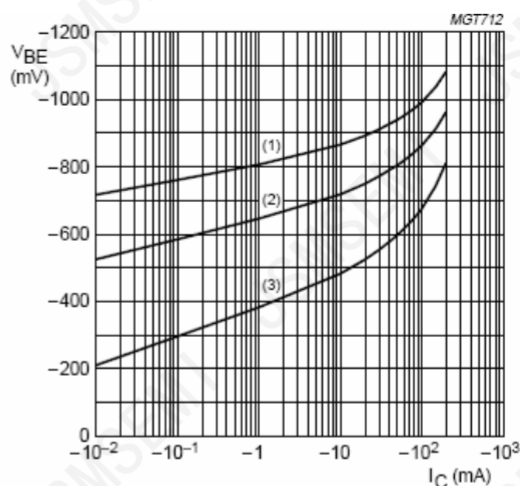
BC857A; $V_{CE} = -5\text{ V}$.

(1) $T_{amb} = 150^\circ\text{C}$.

(2) $T_{amb} = 25^\circ\text{C}$.

(3) $T_{amb} = -55^\circ\text{C}$.

Fig.1 DC current gain as a function of collector current; typical values.




BC857A; $V_{CE} = -5\text{ V}$.

(1) $T_{amb} = -55^\circ\text{C}$.

(2) $T_{amb} = 25^\circ\text{C}$.

(3) $T_{amb} = 150^\circ\text{C}$.

Fig.2 Base-emitter voltage as a function of collector current; typical values.

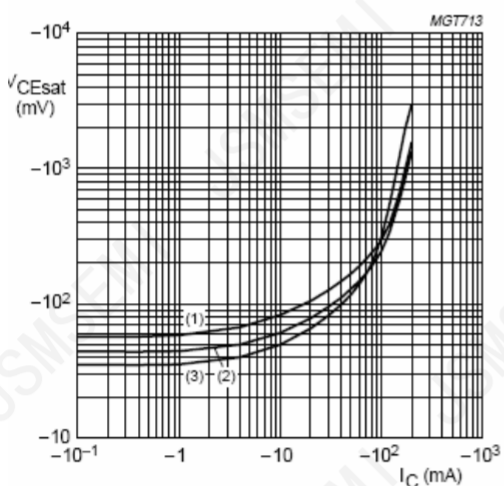


BC857A; $I_C/I_B = 20$.

(1) $T_{amb} = 150^\circ\text{C}$.

(2) $T_{amb} = 25^\circ\text{C}$.

(3) $T_{amb} = -55^\circ\text{C}$.

Fig.3 Collector-emitter saturation voltage as a function of collector current; typical values.

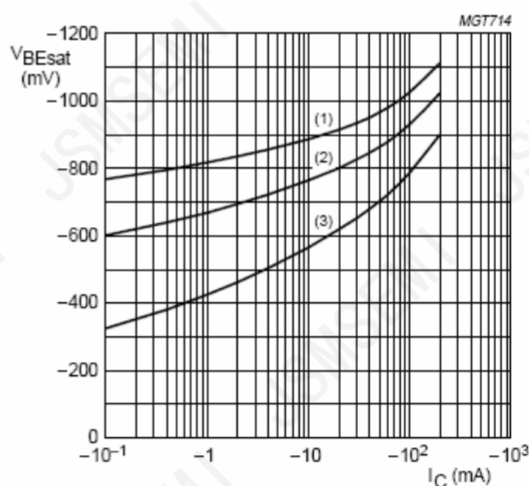


BC857A; $I_C/I_B = 20$.

(1) $T_{amb} = -55^\circ\text{C}$.

(2) $T_{amb} = 25^\circ\text{C}$.

(3) $T_{amb} = 150^\circ\text{C}$.


Fig.4 Base-emitter saturation voltage as a function of collector current; typical values.

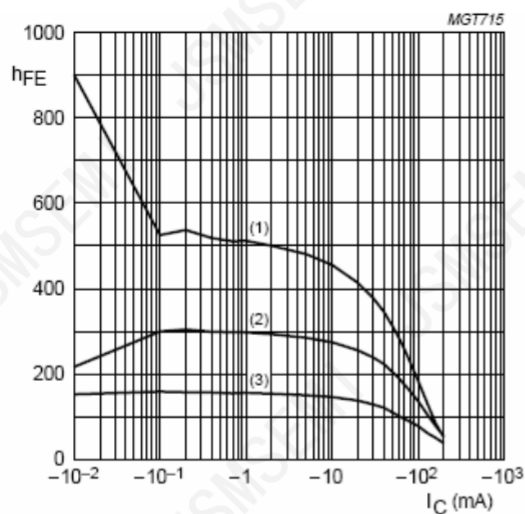

BC857B; $V_{CE} = -5$ V.

- (1) $T_{amb} = 150$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = -55$ °C.


Fig.5 DC current gain as a function of collector current; typical values.

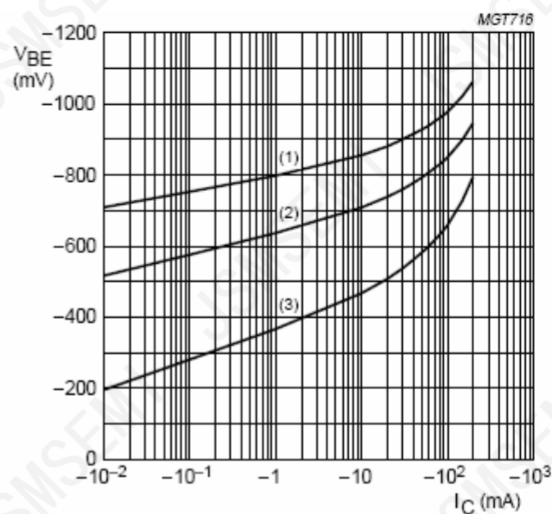

BC857B; $V_{CE} = -5$ V.

- (1) $T_{amb} = -55$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = 150$ °C.


Fig.6 Base-emitter voltage as a function of collector current; typical values.

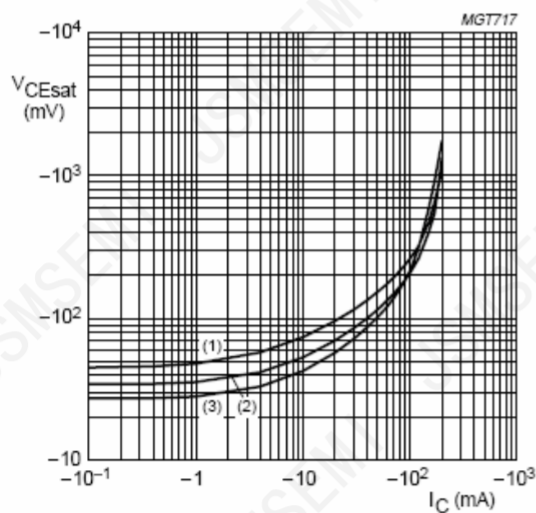

BC857B; $I_C/I_B = 20$.

- (1) $T_{amb} = 150$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = -55$ °C.


Fig.7 Collector-emitter saturation voltage as a

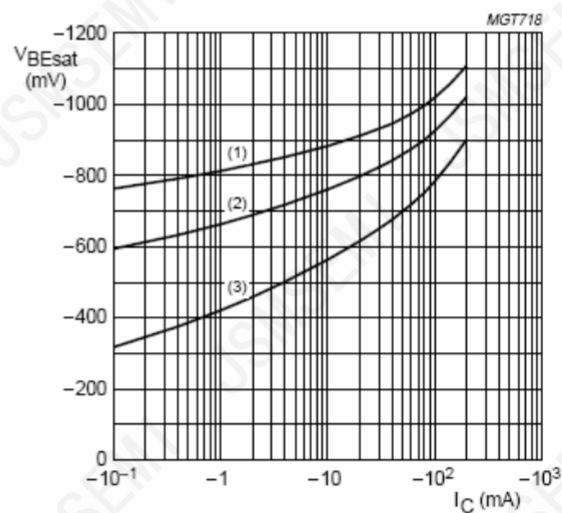

BC857B; $I_C/I_B = 20$.

- (1) $T_{amb} = -55$ °C.
- (2) $T_{amb} = 25$ °C.
- (3) $T_{amb} = 150$ °C.


Fig.8 Base-emitter saturation voltage as a

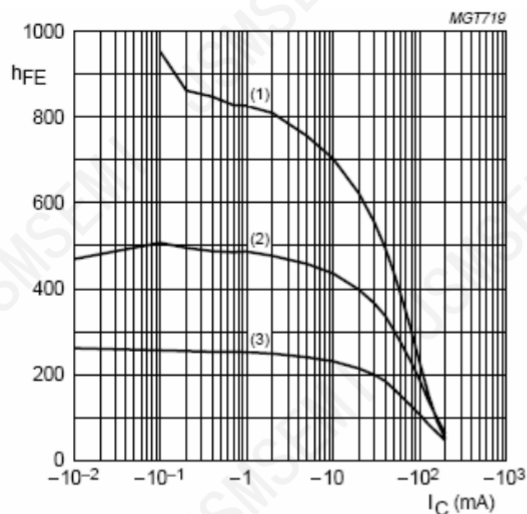

BC857C; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$.


Fig.9 DC current gain as a function of collector current; typical values.

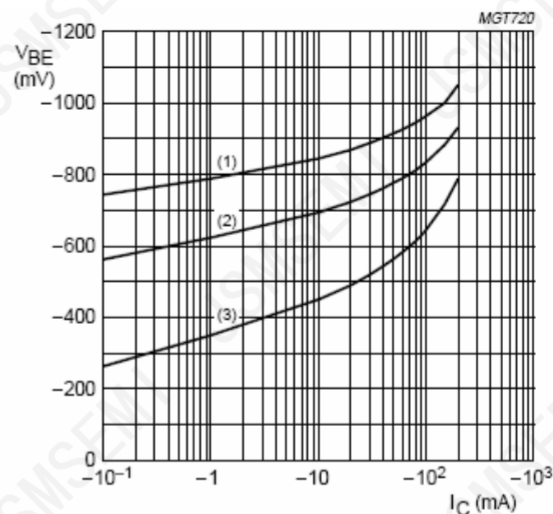

BC857C; $V_{CE} = -5\text{ V}$.

- (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$.


Fig.10 Base-emitter voltage as a function of collector current; typical values.

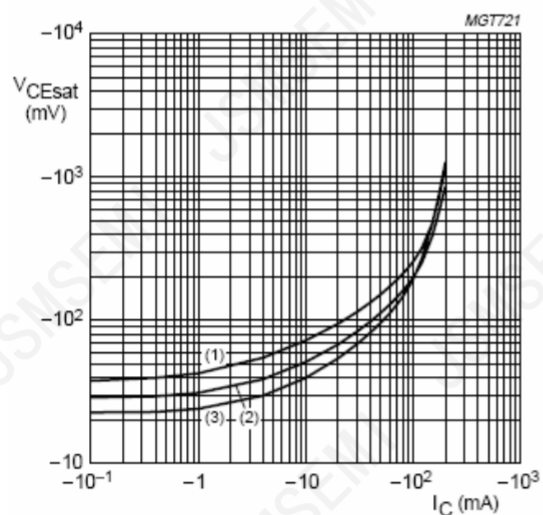

BC857C; $I_C/I_B = 20$.

- (1) $T_{amb} = 150\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = -55\text{ }^{\circ}\text{C}$.

Fig.11 Collector-emitter saturation voltage as a function of collector current; typical values.

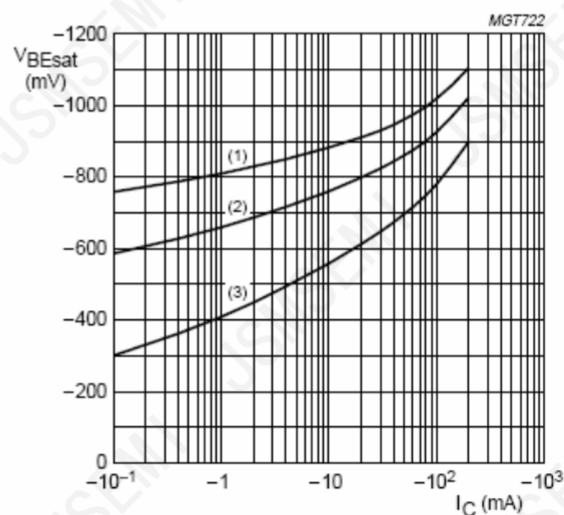

BC857C; $I_C/I_B = 20$.


- (1) $T_{amb} = -55\text{ }^{\circ}\text{C}$.
- (2) $T_{amb} = 25\text{ }^{\circ}\text{C}$.
- (3) $T_{amb} = 150\text{ }^{\circ}\text{C}$.

Fig.12 Base-emitter saturation voltage as a function of collector current; typical values

PACKAGE OUTLINE


Plastic surface mounted package

SOT-23

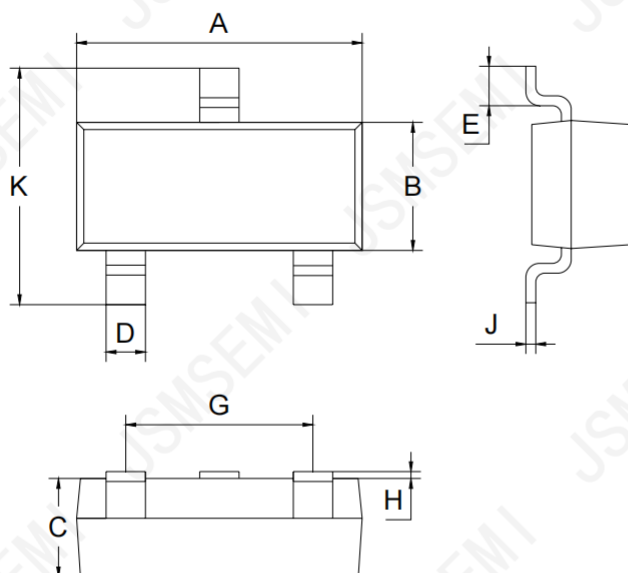

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	1.0 Typical	
D	0.4 Typical	
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.1 Typical	
K	2.20	2.60
All Dimensions in mm		

SOLDERING FOOTPRINT

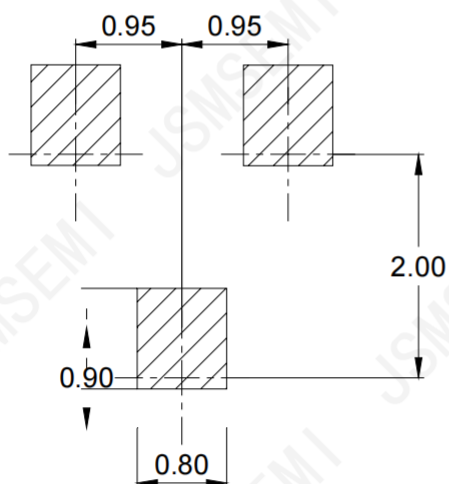

Unit : mm

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com