



Features

- ◆ High density cell design for low $R_{DS(ON)}$
- ◆ Voltage controlled small signal switch
- ◆ Rugged and reliable
- ◆ ESD protected
- ◆ Device Marking Code



MAXIMUM RATINGS ($T_a = 25\text{ }^{\circ}\text{C}$)

SOT-323

Symbol	Parameter	Value	Units
V_{DS}	Drain-source Voltage	60	V
V_{GS}	Gate-source Voltage	± 20	V
I_D	Continuous Drain Current	340	mA
P_d	Total Power Dissipation	200	mW
T_J	Junction Temperature	150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	-55 to 150	$^{\circ}\text{C}$
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	625	$^{\circ}\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_a = 25\text{ }^{\circ}\text{C}$) Static Characteristics

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
$V_{(BR)DSS}$	Drain-source Breakdown Voltage	$V_{GS}=0V, I_D=250\mu A$	60			V
$V_{GS(th)}$	Gate-Threshold Voltage (note 1)	$V_{DS}=V_{GS}, I_D=1mA$	1.0		2.5	V
I_{GSS}	Gate-body Leakage Current	$V_{DS}=0V, V_{GS}=\pm 20V$			± 10	μA
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=48V, V_{GS}=0V$			1	μA
$R_{DS(ON)}$	Drain-source On-resistance (note 1)	$V_{GS}=4.5V, I_D=200mA$ $V_{GS}=10V, I_D=500mA$			5.3 5.0	Ω
V_{SD}	Diode Forward Voltage	$V_{GS}=0V, I_S=300mA$			1.5	V

Dynamic Characteristics

C_{iss}	Input Capacitance	$V_{DS}=10V$ $V_{GS}=0V$ $f=1MHz$			40	pF
C_{oss}	Output Capacitance				30	
C_{rss}	Reverse Transfer Capacitance				10	

Switching Characteristics

$t_{d(on)}$	Turn-on delay time	$V_{DD}=50V, V_{GS}=10V, R_L=250\ \Omega, R_{GS}=50\ \Omega, R_{GEN}=50\ \Omega$			10	ns
$t_{d(off)}$	Turn-off delay time				15	
t_{rr}	Reverse Recovery Time	$V_{GS}=0V, I_S=300mA, V_R=25V, dI_S/dt=-100A/\mu s$		30		ns
Q_r	Recovered Charge	$V_{GS}=0V, I_S=300mA, V_R=25V, dI_S/dt=-100A/\mu s$		30		nC

GATE-SOURCE ZENER DIODE

BV_{GSO}	Gate-Source Breakdown Voltage	$I_{GS}=\pm 1mA(\text{Open Drain})$	± 21.5		± 30	V
------------	-------------------------------	-------------------------------------	------------	--	----------	---







DRAIN-SOURCE DIODE

V_{SD}	Diode Forward Voltage(note 1)	$I_S=300mA, V_{GS}=0V$			1.5	V
I_S	Continuous Diode Forward Current				0.2	A
I_{SM}	Pulsed Diode Forward Current				0.53	A

Note:


1. Pulse Test : Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

TYPICAL CHARACTERISTICS

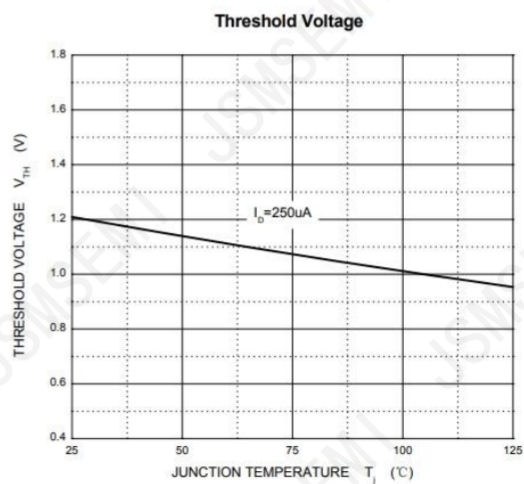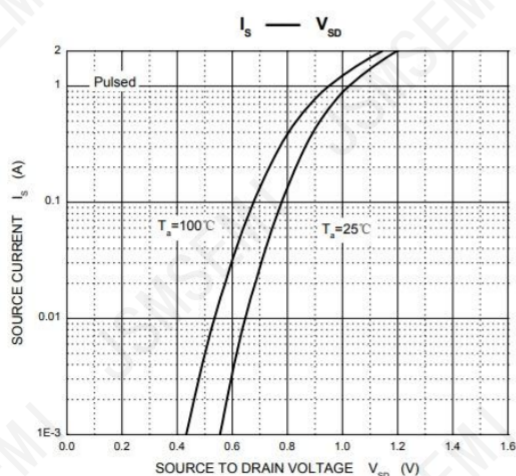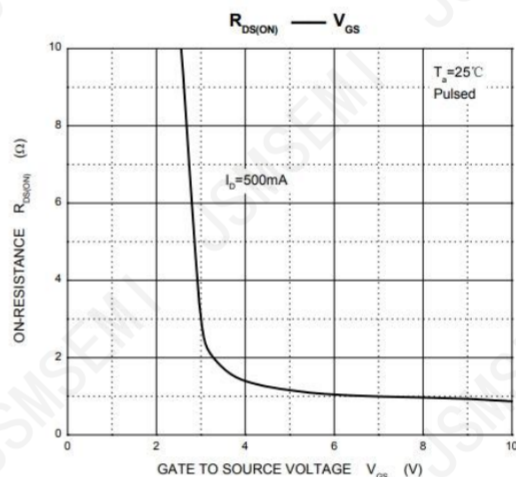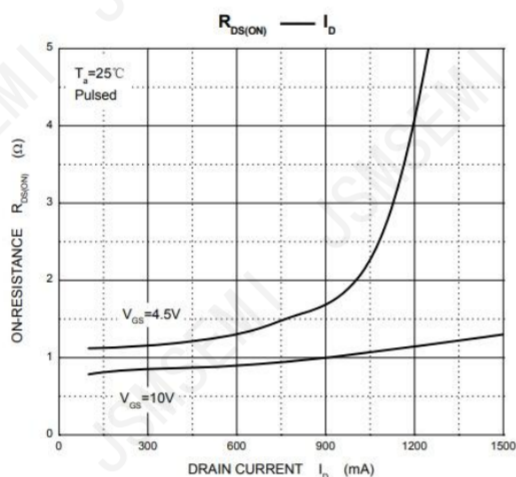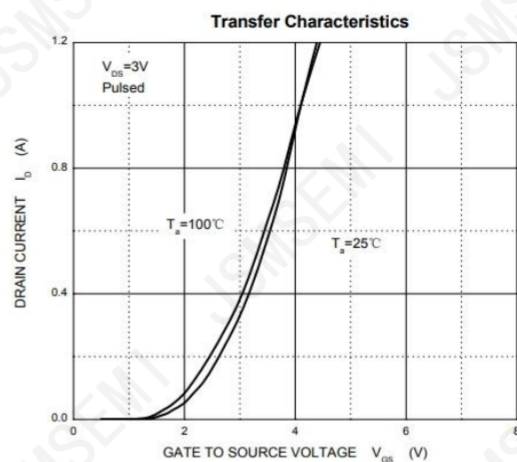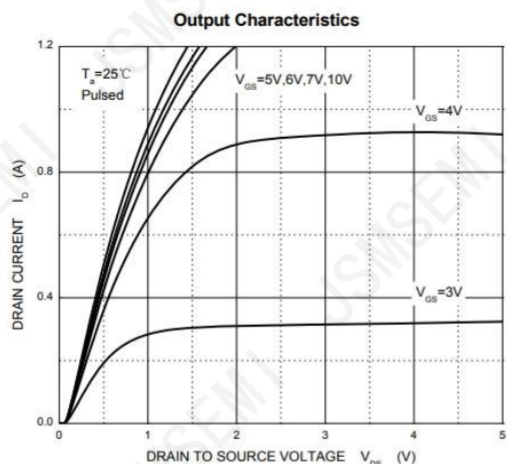

Package Information

SOT-323

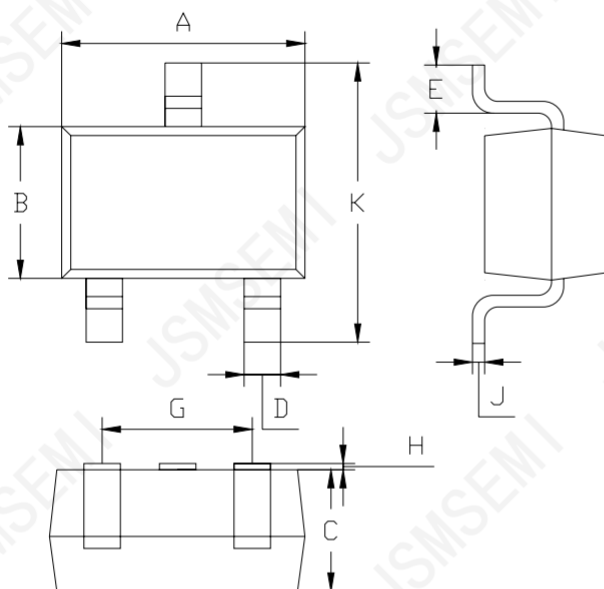

SOT-323		
Dim	Min	Max
A	1.8	2.2
B	1.15	1.35
C	1.0Typical	
D	0.15	0.35
E	0.25	0.40
G	1.2	1.4
H	0.02	0.1
J	0.1Typical	
K	2.1	2.3
All Dimensions in mm		

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com