

1. Description

The LM2592HV series of regulators are monolithic integrated circuits that provide all the active functions for a step-down (buck) switching regulator, capable of driving a 2A load with excellent line and load regulation. These devices are available in fixed output voltages of 3.3V, 5V, 12V, and an adjustable output version.

Requiring a minimum number of external components, these regulators are simple to use and include internal frequency compensation, and a fixed-frequency oscillator.

The LM2592HV series operates at a switching frequency of 150 kHz thus allowing smaller sized filter components than what would be needed with lower frequency switching regulators. Available in a standard 5-lead TO-220 package with several different lead bend options, and a 5-lead TO-263 surface mount package.

A standard series of inductors are available from several different manufacturers optimized for use with the LM2592 series. This feature greatly simplifies the design of switch-mode power supplies.

2. Features


- 3.3V, 5V, 12V, and adjustable output versions
- Adjustable version output voltage range, 1.2V to 57V, $\pm 4\%$ max over line and load conditions
- Available in TO-220 and TO-263 packages
- Guaranteed 2A output load current
- Input voltage range up to 60V
- Requires only 4 external components
- Excellent line and load regulation specifications
- 150 kHz fixed frequency internal oscillator
- TTL shutdown capability
- Low power standby mode, I_Q typically 80 μ A
- High efficiency
- Uses readily available standard inductors
- Thermal shutdown and current limit protection

3. Applications


- Simple high-efficiency step-down (buck) regulator
- On-card switching regulators
- Positive to negative converter




4.Typical Application (Fixed Output Voltage Versions)

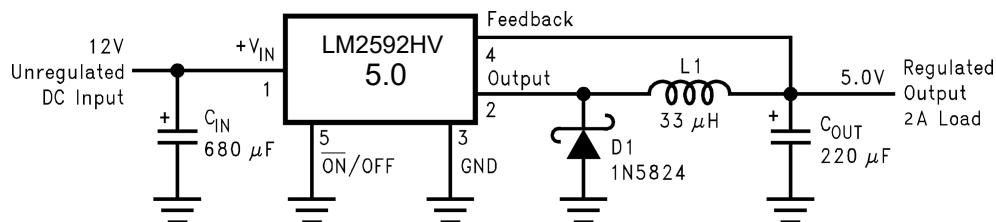

5.Package Types




TO-220




TO-263



6. Pinning information



TO-220



TO-263

Pin Descriptions

| Name | Description |
|----------|---|
| V_{IN} | Input supply voltage |
| Output | Switching output |
| GND | Ground |
| Feedback | Output voltage feedback |
| ON/OFF | ON/OFF shutdown Active is "Low" or floating |



7. Absolute Maximum Ratings

| Parameter | Rating |
|---|-------------------------|
| Maximum Supply Voltage | 63V |
| ON /OFF Pin Input Voltage | $-0.3 \leq V \leq +25V$ |
| Feedback Pin Voltage | $-0.3 \leq V \leq +25V$ |
| Output Voltage to Ground (Steady State) | -1V |
| Power Dissipation | Internally limited |
| Storage Temperature Range | -65°C to +150°C |
| ESD Susceptibility HumanBodyModel | 2kV |
| Vapor Phase (60 sec.) | +215°C |
| Infrared (10 sec.) | +245°C |
| T Package (Soldering, 10 sec.) | +260°C |
| Maximum Junction Temperature | +150°C |

8. Operating Conditions

| Parameter | Rating |
|-------------------|--|
| Temperature Range | $-40^{\circ}C \leq T_J \leq +125^{\circ}C$ |
| Supply Voltage | 4.5V ~ 60V |



9.1 Electrical Characteristics

Specifications with standard type face are for $T_J=25^\circ\text{C}$, and those with boldface type apply over full Operating Temperature Range

| Parameter | Symbol | Conditions | Typ | Limit | Units |
|--|------------------|--|------|-------------|--------|
| System Parameters (Note 5) Test Circuit Figure 1 (LM2592HV-3.3) | | | | | |
| Output Voltage | V_{OUT} | $4.75\text{V} \leq V_{\text{IN}} \leq 60\text{V}, 0.2\text{A} \leq I_{\text{LOAD}} \leq 2\text{A}$ | 3.3 | | V |
| | | | | 3.168/3.135 | V(min) |
| | | | | 3.432/3.465 | V(max) |
| Efficiency | η | $V_{\text{IN}}=12\text{V}, I_{\text{LOAD}}=2\text{A}$ | 73 | | % |
| System Parameters (Note 5) Test Circuit Figure 1 (LM2592HV-5.0) | | | | | |
| Output Voltage | V_{OUT} | $7\text{V} \leq V_{\text{IN}} \leq 60\text{V}, 0.2\text{A} \leq I_{\text{LOAD}} \leq 2\text{A}$ | 5 | | V |
| | | | | 4.800/4.750 | V(min) |
| | | | | 5.200/5.250 | V(max) |
| Efficiency | η | $V_{\text{IN}}=12\text{V}, I_{\text{LOAD}}=2\text{A}$ | 80 | | % |
| System Parameters (Note 5) Test Circuit Figure 1 (LM2592HV-12) | | | | | |
| Output Voltage | V_{OUT} | $15\text{V} \leq V_{\text{IN}} \leq 60\text{V}, 0.2\text{A} \leq I_{\text{LOAD}} \leq 2\text{A}$ | 12 | | V |
| | | | | 11.52/11.40 | V(min) |
| | | | | 12.48/12.60 | V(max) |
| Efficiency | η | $V_{\text{IN}}=25\text{V}, I_{\text{LOAD}}=2\text{A}$ | 90 | | % |
| System Parameters (Note 5) Test Circuit Figure 1 (LM2592HV-ADJ) | | | | | |
| Feedback Voltage | V_{FB} | $4.5\text{V} \leq V_{\text{IN}} \leq 57\text{V}, 0.2\text{A} \leq I_{\text{LOAD}} \leq 2\text{A}$ V_{OUT} programmed for 3V. Circuit of Figure 1. | 1.23 | | V |
| | | | | 1.193/1.180 | V(min) |
| | | | | 1.267/1.280 | V(max) |
| Efficiency | η | $V_{\text{IN}}=12\text{V}, V_{\text{OUT}}=3\text{V}, I_{\text{LOAD}}=2\text{A}$ | 73 | | % |



9.2 Electrical Characteristics (All Output Voltage Versions)

Specifications with standard type face are for $T_J=25^\circ\text{C}$, and those with boldface type apply over full Operating Temperature Range. Unless otherwise specified, $V_{IN}=12\text{V}$ for the 3.3V, 5V, and Adjustable version and $V_{IN}=24\text{V}$ for the 12V version. $I_{LOAD}=500\text{mA}$

| Parameter | Symbol | Conditions | Typ | Limit | Units |
|---------------------------|------------|---|------|---------|---------------------|
| Device Parameters | | | | | |
| Feedback Bias Current | I_B | Adjustable Version Only $V_{FB}=1.3\text{V}$ | 10 | | nA |
| | | | | 50/100 | nA(max) |
| Oscillator Frequency | f_O | (Note 6) | 150 | | kHz |
| | | | | 127/110 | kHz(min) |
| | | | | 173/173 | kHz(max) |
| Saturation Voltage | V_{SAT} | $I_{OUT}=2\text{A}$ (Notes 7, 8) | 1.16 | | V |
| | | | | 1.4/1.5 | V(max) |
| Max Duty Cycle (ON) | DC | (Note 8) | 100 | | % |
| Min Duty Cycle (OFF) | | (Note 9) | 0 | | % |
| Current Limit | I_{CL} | Peak Current (Notes 7, 8) | 3 | | A |
| | | | | 2.4/2.3 | A(min) |
| | | | | 3.7/4.0 | A(max) |
| Output Leakage Current | I_L | Output=0V (Notes 7, 9) | | 50 | μA (max) |
| | | Output=-1V (Note 10) | 2 | | mA |
| | | | | 30 | mA(max) |
| Quiescent Current | I_Q | (Note 9) | 5 | | mA |
| | | | | 10 | mA(max) |
| Standby Quiescent Current | I_{STBY} | ON/OFF pin=5V (OFF) (Note 10) | 80 | | μA |
| | | | | 200/250 | μA (max) |



| Parameter | Symbol | Conditions | Typ | Limit | Units |
|--------------------|---------------|--|-----|-------|-------|
| Thermal Resistance | θ_{JC} | TO-220 or TO-263 Package Junction to Case | 2 | | °C/W |
| | θ_{JA} | TO-220 Package, Junction to Ambient (Note 11) | 50 | | °C/W |
| | θ_{JA} | TO-263 Package, Junction to Ambient (Note 12) | 50 | | °C/W |
| | θ_{JA} | TO-263 Package, Junction to Ambient (Note 13) | 30 | | °C/W |
| | θ_{JA} | TO-263 Package, Junction to Ambient (Note 14) | 20 | | °C/W |

ON/OFF CONTROL Test Circuit Figure 1

| | | | | | |
|--------------------------|----------|----------------------------------|------|-----|---------|
| ON/OFF Pin Logic Input | V_{IH} | Low (Regulator ON) | 1.3 | | V |
| Threshold Voltage | | | | 0.6 | V(max) |
| ON/OFF Pin Input Current | I_H | $V_{LOGIC}=2.5V$ (Regulator OFF) | 5 | | µA |
| | | | | 15 | µA(max) |
| | I_L | $V_{LOGIC}=0.5V$ (Regulator ON) | 0.02 | | µA |
| | | | | 5 | µA(max) |

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics.

Note 2: The human body model is a 100 pF capacitor discharged through a 1.5k resistor into each pin.

Note 3: Typical numbers are at 25°C and represent the most likely norm.

Note 4: All limits guaranteed at room temperature (standard type face) and at temperature extremes (bold type face). All room temperature limits are 100% production tested. All limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods. All limits are used to calculate Average Outgoing Quality Level (AOQL).

Note 5: External components such as the catch diode, inductor, input and output capacitors, and voltage programming resistors can affect switching regulator system performance. When the LM2592 is used as shown in the Figure 1 test circuit, system performance will be as shown in system parameters section of Electrical Characteristics.



Note 6: The switching frequency is reduced when the second stage current limit is activated.

Note 7: No diode, inductor or capacitor connected to output pin.

Note 8: Feedback pin removed from output and connected to 0V to force the output transistor switch ON.

Note 9: Feedback pin removed from output and connected to 12V for the 3.3V, 5V, and the ADJ. version, and 15V for the 12V version, to force the output transistor switch OFF.

Note 10: $V_{IN} = 60V$.

Note 11: Junction to ambient thermal resistance (no external heat sink) for the TO-220 package mounted vertically, with the leads soldered to a printed circuit board with (1 oz.) copper area of approximately 1 in².

Note 12: Junction to ambient thermal resistance with the TO-263 package tab soldered to a single printed circuit board with 0.5 in² of (1 oz.) copper area.

Note 13: Junction to ambient thermal resistance with the TO-263 package tab soldered to a single sided printed circuit board with 2.5 in² of (1 oz.) copper area.

Note 14: Junction to ambient thermal resistance with the TO-263 package tab soldered to a double sided printed circuit board with 3 in² of (1 oz.) copper area on the LM2592S side of the board, and approximately 16 in² of copper on the other side of the p-c board. See Application Information in this data sheet and the thermal model in Switchers Made Simple™ version 4.3 software.

10.1 Typical Characteristic (Circuit of Figure 1)

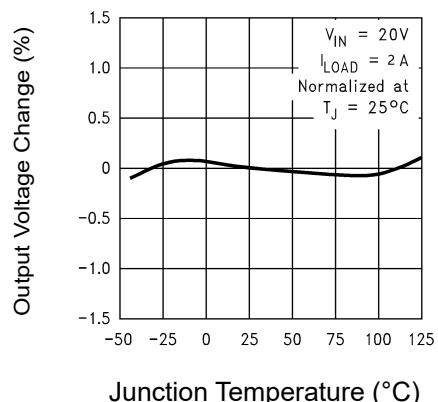


Figure 1: Normalized Output Voltage

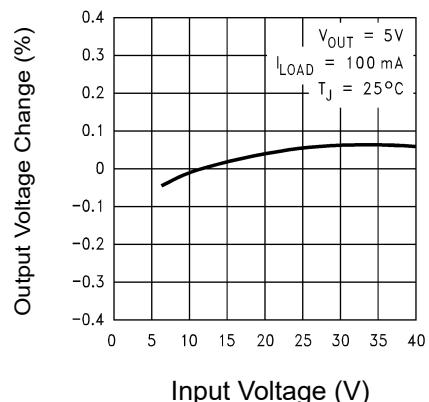


Figure 2: Line Regulation

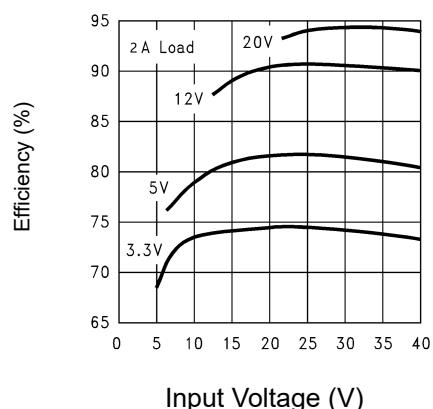


Figure 3: Efficiency

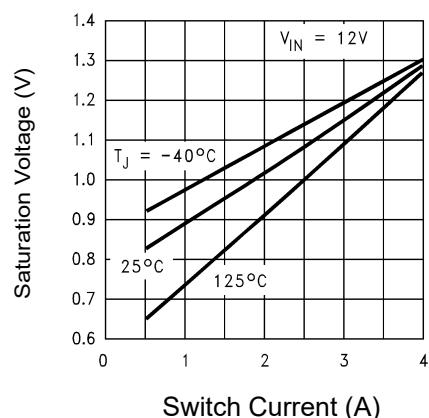


Figure 4: Switch Saturation Voltage

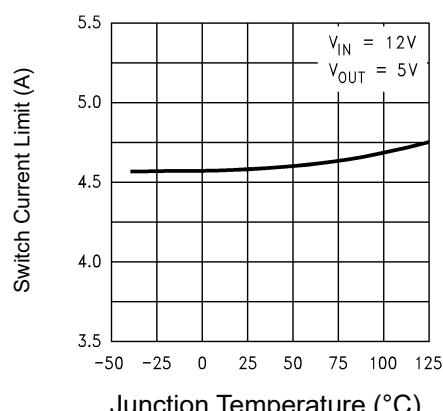


Figure 5: Switch Current Limit

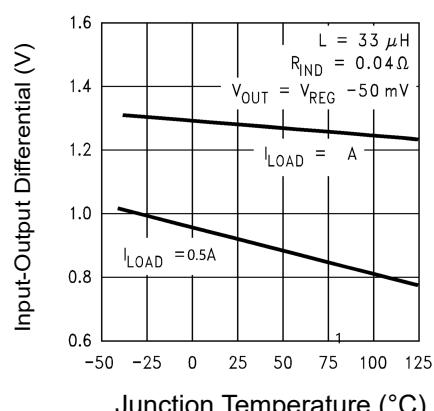


Figure 6: Dropout Voltage

10.2 Typical Characteristic

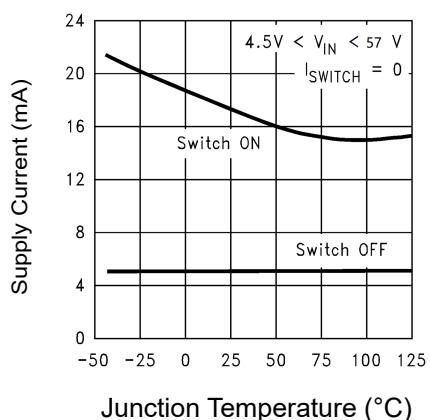


Figure 7: Quiescent Current

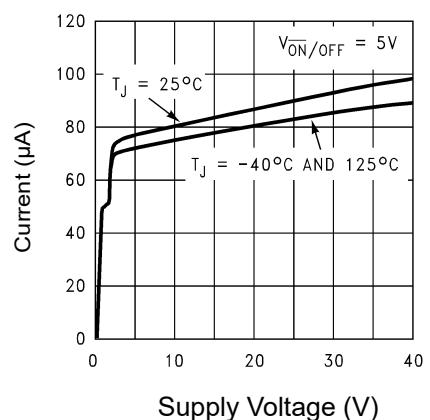


Figure 8: Quiescent Current

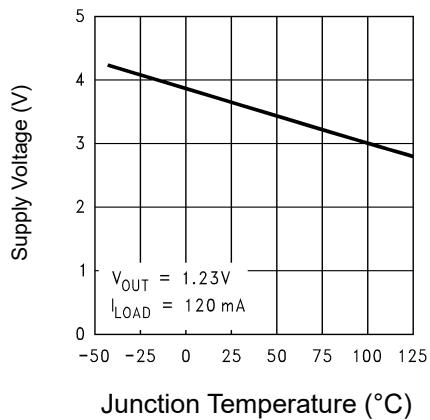


Figure 9: Supply Voltage

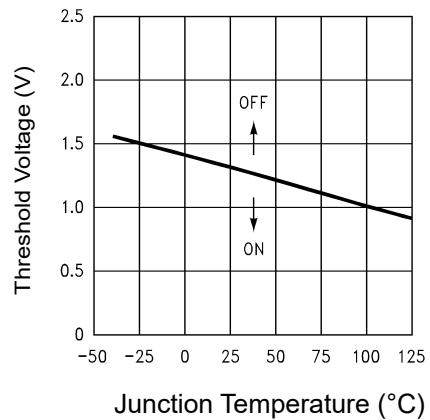


Figure 10: ON/OFF Threshold Voltage

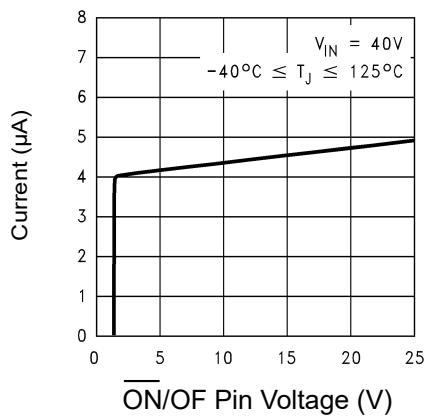


Figure 11: ON/OFF Pin Current (Sinking)


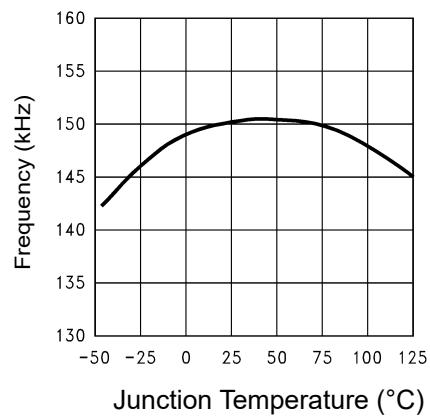


Figure 12: Switching Frequency



11. Test Circuit and Layout Guidelines (Continued)

Adjustable Output Voltage Versions

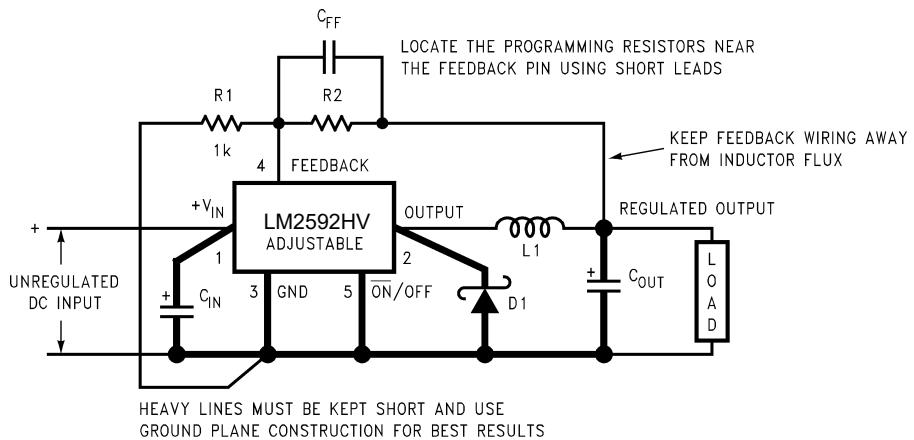

$$V_{OUT} = V_{REF}(1 + R_2/R_1)$$

where $V_{REF} = 1.23V$

$$R_2 = R_1(V_{OUT}/V_{REF} - 1)$$

Select R_1 to be approximately $1\text{ k}\Omega$, use a 1% resistor for best stability.

C_{IN} — $470\mu\text{F}$, 50V, Aluminum Electrolytic Nichicon "PL Series"

C_{OUT} — $220\mu\text{F}$, 35V Aluminum Electrolytic, Nichicon "PL Series"

D1 — 3.3A, 60V Schottky Rectifier

L1 — $33\mu\text{H}$

R1 — $1\text{k}\Omega$, 1%

C_{FF} — See Application Information Section

Figure 1. Standard Test Circuits and Layout Guides



As in any switching regulator, layout is very important. Rapidly switching currents associated with wiring inductance can generate voltage transients which can cause problems. For minimal inductance and ground loops, the wires indicated by heavy lines should be wide printed circuit traces and should be kept as short as possible. For best results, external components should be located as close to the switcher IC as possible using ground plane construction or single point grounding.

If open core inductors are used, special care must be taken as to the location and positioning of this type of inductor. Allowing the inductor flux to intersect sensitive feedback, IC groundpath and C_{OUT} wiring can cause problems. When using the adjustable version, special care must be taken as to the location of the feedback resistors and the associated wiring. Physically locate both resistors near the IC, and route the wiring away from the inductor, especially an open core type of inductor. (See application section for more information.)

12. Block Diagram

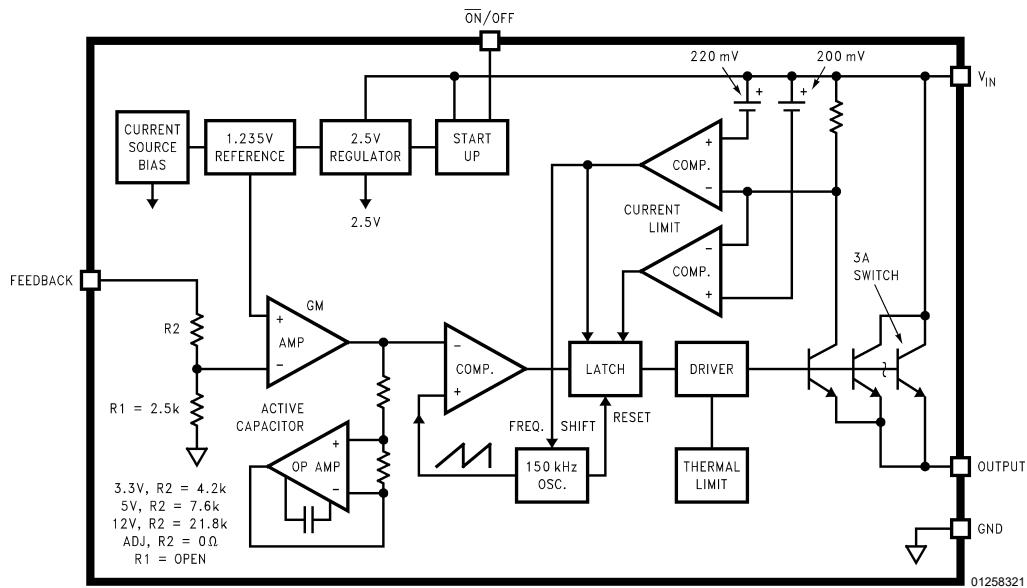


Figure 12.

13. Application Information

Pin Functions

+V_{IN} – This is the positive input supply for the IC switching regulator. A suitable input bypass capacitor must be present at this pin to minimize voltage transients and to supply the switching currents needed by the regulator.

Ground – Circuit ground.

Output – Internal switch. The voltage at this pin switches between ($+V_{IN} - V_{SAT}$) and approximately $-0.5V$, with a duty cycle of approximately V_{OUT}/V_{IN} . To minimize coupling to sensitive circuitry, the PC board copper area connected to this pin should be kept to a minimum.

Feedback – Senses the regulated output voltage to complete the feedback loop.

ON /OFF – Allows the switching regulator circuit to be shut down using logic level signals thus dropping the total input supply current to approximately $80 \mu A$. Pulling this pin below a threshold voltage of approximately $1.3V$ turns the regulator on, and pulling this pin above $1.3V$ (up to a maximum of $25V$) shuts the regulator down. If this shutdown feature is not needed, the ON /OFF pin can be wired to the ground pin or it can be left open, in either case the regulator will be in the ON condition.



External Components

Input Capacitor

C_{IN} — A low ESR aluminum or tantalum bypass capacitor is needed between the input pin and ground pin. It must be located near the regulator using short leads. This capacitor prevents large voltage transients from appearing at the input, and provides the instantaneous current needed each time the switch turns on.

The important parameters for the Input capacitor are the voltage rating and the RMS current rating. Because of the relatively high RMS currents flowing in a buck regulator's input capacitor, this capacitor should be chosen for its RMS current rating rather than its capacitance or voltage ratings, although the capacitance value and voltage rating are directly related to the RMS current rating.

The RMS current rating of a capacitor could be viewed as a capacitor's power rating. The RMS current flowing through the capacitors internal ESR produces power which causes the internal temperature of the capacitor to rise. The RMS current rating of a capacitor is determined by the amount of current required to raise the internal temperature approximately 10°C above an ambient temperature of 105°C. The ability of the capacitor to dissipate this heat to the surrounding air will determine the amount of current the capacitor can safely sustain. Capacitors that are physically large and have a large surface area will typically have higher RMS current ratings. For a given capacitor value, a higher voltage electrolytic capacitor will be physically larger than a lower voltage capacitor, and thus be able to dissipate more heat to the surrounding air, and therefore will have a higher RMS current rating.

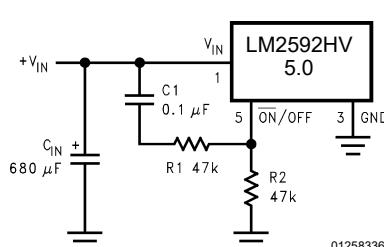


Figure 21. Delayed Startup

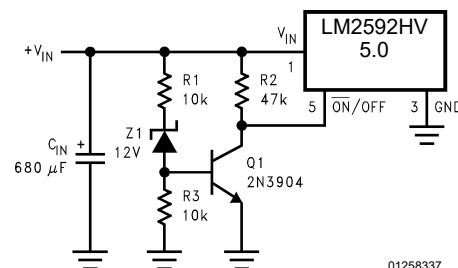


Figure 22. Undervoltage Lockout for Buck Regulator

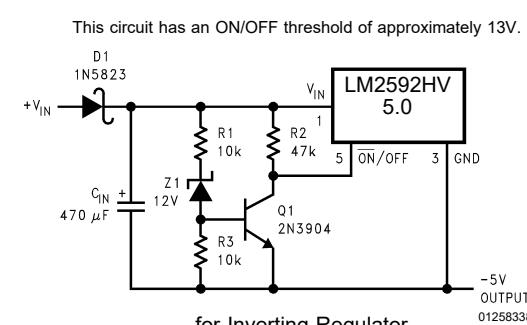


Figure 23. Undervoltage Lockout for Inverting Regulator



Delayed Startup


The circuit in Figure 21 uses the the ON /OFF pin to provide a time delay between the time the input voltage is applied and the time the output voltage comes up (only the circuitry pertaining to the delayed start up is shown). As the input voltage rises, the charging of capacitor C1 pulls the ON /OFF pin high, keeping the regulator off. Once the input voltage reaches its final value and the capacitor stops charging, and resistor R₂ pulls the ON/OFF pin low, thus allowing the circuit to start switching. Resistor R₁ is included to limit the maximum voltage applied to the ON /OFF pin (maximum of 25V), reduces power supply noise sensitivity, and also limits the capacitor, C1, discharge current. When high input ripple voltage exists, avoid long delay time, because this ripple can be coupled into the ON /OFF pin and cause problems. This delayed startup feature is useful in situations where the input power source is limited in the amount of current it can deliver. It allows the input voltage to rise to a higher voltage before the regulator starts operating. Buck regulators require less input current at higher input voltages.

Undervoltage Lockout

Some applications require the regulator to remain off until the input voltage reaches a predetermined voltage. An undervoltage lockout feature applied to a buck regulator is shown in Figure 22, while Figure 23 and 24 applies the same feature to an inverting circuit. The circuit in Figure 23 features a constant threshold voltage for turn on and turn off (zener voltage plus approximately one volt). If hysteresis is needed, the circuit in Figure 24 has a turn ON voltage which is different than the turn OFF voltage. The amount of hysteresis is approximately equal to the value of the output voltage. If zener voltages greater than 25V are used, an additional 47 kΩ resistor is needed from the ON /OFF pin to the ground pin to stay within the 25V maximum limit of the ON/OFF pin.


Inverting Regulator

The circuit in Figure 25 converts a positive input voltage to a negative output voltage with a common ground. The circuit operates by bootstrapping the regulator's ground pin to the negative output voltage, then grounding the feedback pin. This example uses the LM2592HV-5.0 to generate a -5V output, but other output voltages are possible by selecting other output voltage versions, including the adjustable version. Since this regulator topology can produce an output voltage that is either greater than or less than the input voltage, the maximum output current greatly depends on both the input and output voltage. The curve shown in Figure 26 provides a guide as to the amount of output load current possible for the different input and output voltage conditions.

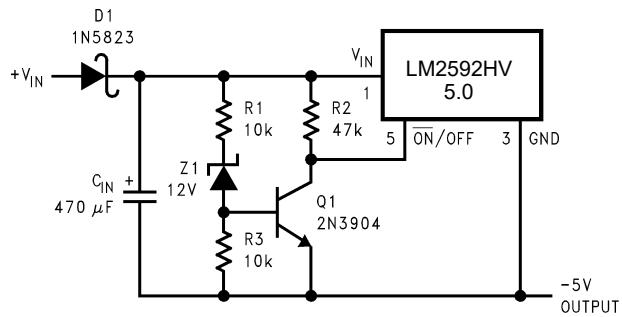

This circuit has hysteresis Regulator starts switching at $V_{IN} = 13V$ Regulator stops switching at $V_{IN} = 8V$

Figure 24. Undervoltage Lockout with Hysteresis for Inverting Regulator

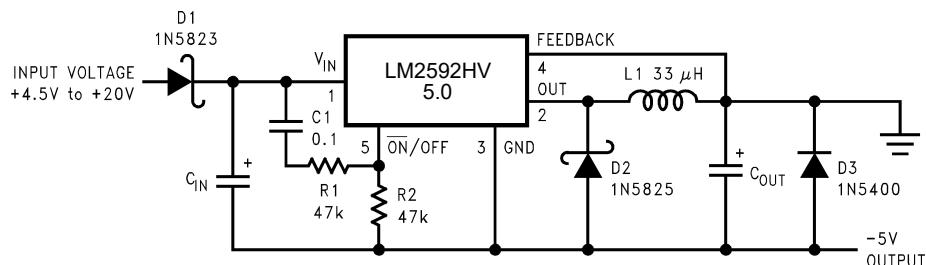

C_{IN} — 68 μF/25V Tant. Sprague 595D

470 μF/50V Elec. Panasonic HFQ

C_{OUT} — 47 μF/20V Tant. Sprague 595D

220 μF/25V Elec. Panasonic HFQ

Figure 25. Inverting -5V Regulator with Delayed Startup

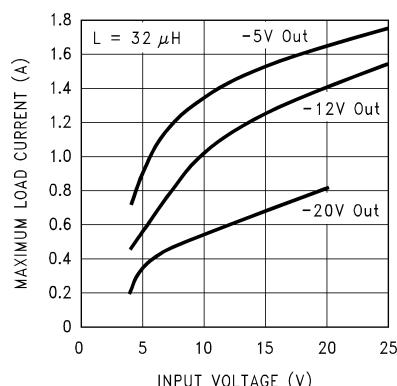


Figure 26. Inverting Regulator Typical Load Current



Because of differences in the operation of the inverting regulator, the standard design procedure is not used to select the inductor value. In the majority of designs, a 33 μ H, 3.5A inductor is the best choice. Capacitor selection can also be narrowed down to just a few values. Using the values shown in Figure 25 will provide good results in the majority of inverting designs.

This type of inverting regulator can require relatively large amounts of input current when starting up, even with light loads. Input currents as high as the LM2592HV current limit (approx 3A) are needed for at least 2 ms or more, until the output reaches its nominal output voltage. The actual time depends on the output voltage and the size of the output capacitor. Input power sources that are current limited or sources that can not deliver these currents without getting loaded down, may not work correctly. Because of the relatively high startup currents required by the inverting topology the delayed startup feature (C_1 , R_1 and R_2) shown in Figure 25 is recommended. By delaying the regulator startup, the input capacitor is allowed to charge up to a higher voltage before the switcher begins operating. A portion of the high input current needed for startup is now supplied by the input capacitor (C_{IN}). For severe start up conditions, the input capacitor can be made much larger than normal.

Inverting Regulator Shutdown Methods

To use the \overline{ON} /OFF pin in a standard buck configuration is simple, pull it below 1.3V(@25°C, referenced to ground) to turn regulator ON, pull it above 1.3V to shut the regulator OFF. With the inverting configuration, some level shifting is required, because the ground pin of the regulator is no longer at ground, but is now setting at the negative output voltage level. Two different shutdown methods for inverting regulators are shown in Figure 27 and 28.

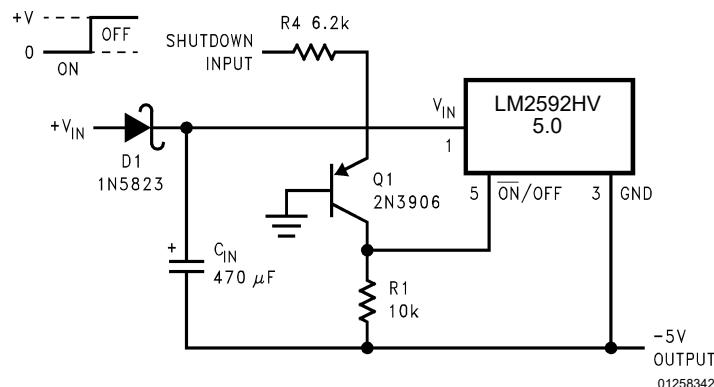


Figure 27. Inverting Regulator Ground Referenced Shutdown


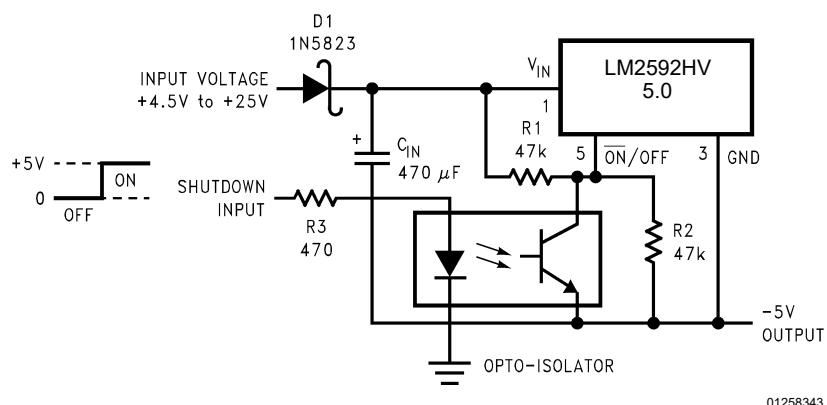


Figure 28. Inverting Regulator Ground Referenced Shutdown using Opto Devic

14.1 TO-220 Package Outline Dimensions

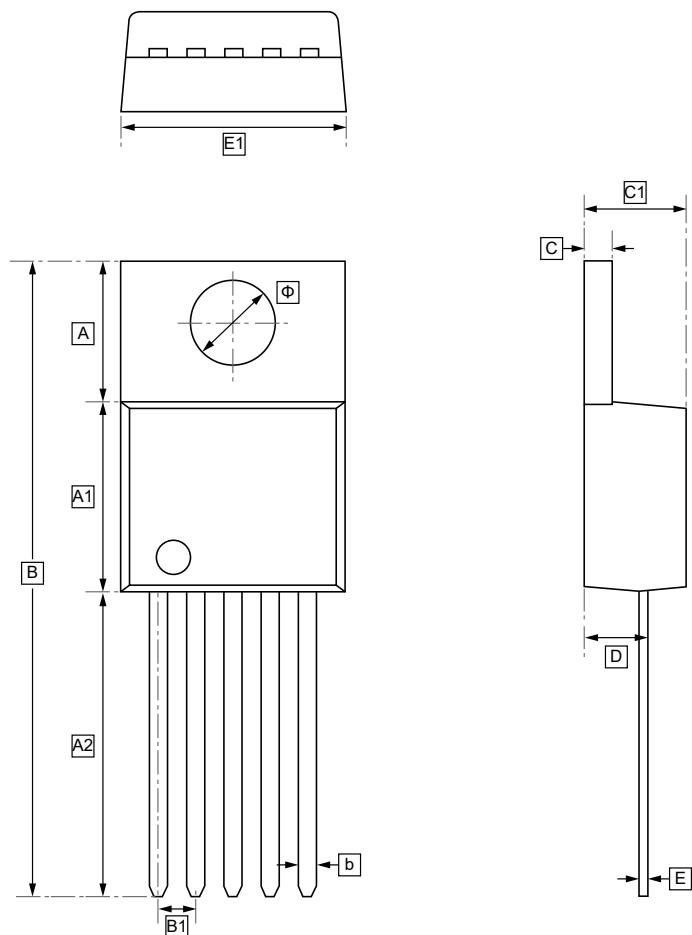


DIMENSIONS (mm are the original dimensions)

| Symbol | A | A1 | A2 | B | B1 | b | C | C1 | D | E | E1 | Φ |
|--------|-----|------|-------|-------|------|------|------|------|------|------|-------|------|
| Min | 6.3 | 8.48 | 13.67 | 28.55 | | 0.75 | 1.20 | 0.45 | 2.38 | 0.33 | 10.00 | 3.80 |
| Max | 6.4 | 8.68 | 13.97 | 28.95 | 1.70 | 0.85 | 1.30 | 0.65 | 2.58 | 0.43 | 10.20 | 3.90 |



14.2 TO-263 Package Outline Dimensions

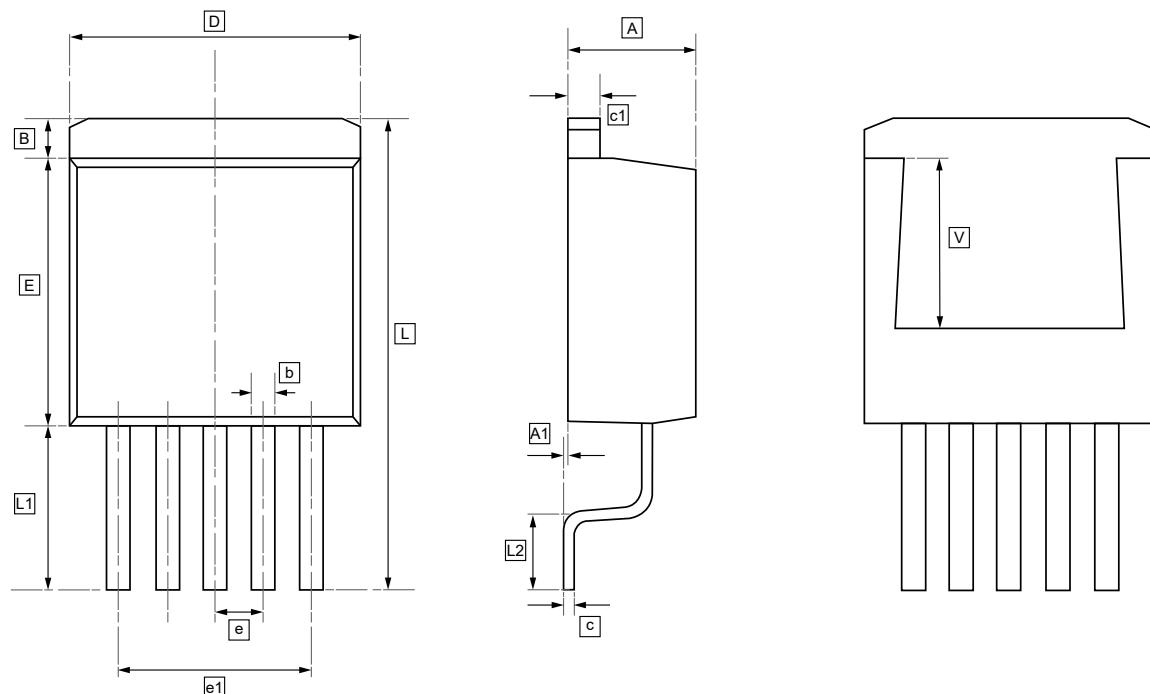


DIMENSIONS (mm are the original dimensions)

| Symbol | A | A1 | B | b | c | c1 | D | E | e | e1 | L | L1 |
|------------|-------|-------|-------|-------|-------|-------|--------|-------|-------|-------|--------|-------|
| Min | 4.470 | 0.000 | 1.560 | 0.710 | 0.310 | 1.170 | 9.880 | 8.200 | 1.700 | 6.700 | 15.140 | 5.080 |
| Max | 4.670 | 0.150 | 1.760 | 0.910 | 0.530 | 1.370 | 10.180 | 8.600 | TYP | 6.900 | 15.540 | 5.480 |

| Symbol | L2 | V |
|------------|-------|-------|
| Min | 2.340 | 5.600 |
| Max | 2.740 | REF |



15. Ordering Information



yy: Year Code

ww: Week Code

| Order Code | Marking | Package | Base QTY | Delivery Mode | Delivery Mode |
|-------------------|---------------|---------|----------|---------------|--------------------------------|
| UMW LM2592HVS-3.3 | LM2592HVS-3.3 | TO-263 | 800 | Tape and reel | -40°C ≤ T _A ≤ 125°C |
| UMW LM2592HVS-5.0 | LM2592HVS-5.0 | TO-263 | 800 | Tape and reel | -40°C ≤ T _A ≤ 125°C |
| UMW LM2592HVS-12 | LM2592HVS-12 | TO-263 | 800 | Tape and reel | -40°C ≤ T _A ≤ 125°C |
| UMW LM2592HVS-ADJ | LM2592HVS-ADJ | TO-263 | 800 | Tape and reel | -40°C ≤ T _A ≤ 125°C |
| UMW LM2592HVT-3.3 | LM2592HVT-3.3 | TO-220 | 1000 | Tape and reel | -40°C ≤ T _A ≤ 125°C |
| UMW LM2592HVT-5.0 | LM2592HVT-5.0 | TO-220 | 1000 | Tape and reel | -40°C ≤ T _A ≤ 125°C |
| UMW LM2592HVT-12 | LM2592HVT-12 | TO-220 | 1000 | Tape and reel | -40°C ≤ T _A ≤ 125°C |
| UMW LM2592HVT-ADJ | LM2592HVT-ADJ | TO-220 | 1000 | Tape and reel | -40°C ≤ T _A ≤ 125°C |



16.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.