



钰地半导体
Tudi Semiconductor

Product Specification

TUDI-SN65HVD30MDREP

3.3V full-duplex RS-485 driver and receiver

网址 www.sztdbdt.com 🔍

用芯智造 · 卓越品质

**semiconductor device
manufacturer**

- Design
- research and development
- production
- and sales



Features

- 1/8 unit load option available (up to 256 nodes on the bus)
- Bus pin ESD protection exceeds 1 kV HBM
- 20Mbps data rate
- Low current standby mode
- Undisturbed power up and power down protection for hot plug applications
- 5V tolerant input
- Bus idle, open, and short circuit fault protection
- Driver current limiting and thermal shutdown
- Meets or exceeds requirements of ANSIIA/EIA-485-A and RS-422

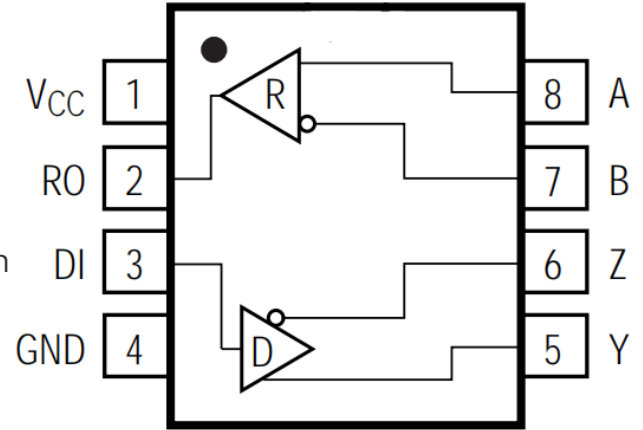


Figure 1. Pin Diagram

Description

The SN65HVD3x-EP devices are three-state differential line drivers and differential input line receivers with 3V power supplies. driver and receiver has independent data input and output pins for full-duplex bus communication designs. They are designed for balanced transmission lines and are interoperable with devices compliant with AN TIA/EIA-485A, TIA/EIA-422-B standards. The SN65HVD30 is fully enabled and not require an external enable pin. The device operates over a temperature range of -40°C to 125°C

Applications

- Utility metering
- DTE and DCE interfaces
- Industrial, process and building automation
- Point of sale (POS) terminals and networks Controlled baselines



Pin description

Pin number	Pin name	Pin function
1	VCC	Power supply:3.0V VCC 5.5V
2	RO	Receiver output. If A-B is greater than or equal to +200mV,RO output is high level;if A-B is less than or equal to-200mV,RO output is low level.
3	DI	DI driver input.A low level on DI causes the in-phase terminal Y output to be low and the out-of-phase terminal Z output to be high;a high level on DI causes the in-phase terminal Y output to be high and the out-of-phase terminal Z output to be low.
4	GND	Landing
5	Y	Drive in-phase output terminal
6	Z	The inverting output of the driver
7	B	Receiver inverting input
8	A	Receiver in-phase input

Extreme parameter

Parameter	Symbol	Big or small	Unit
Welding temperature range		300	°C
Operating temperature range		-40~125	°C
Storage operating temperature range		-60~150	°C
Continuous power consumption	SOP8	400	mW
	DIP8	700	mW
Supply voltage	VCC	+7	V
Control the port voltage	DI	-0.3~VCC+0.3	V
Bus-side input vol-tage	A、 B	-8~13	V
Receiver output vo-ltage	RO	-0.3~VCC+0.3	V

The maximum limit parameter value is the value beyond which irreversible damage to the device may occur. Under these conditions, the device will not function properly and continuous operation at the maximum allowable rating may affect the reliability of the device. All voltage reference points are ground.



Parameter	Symbol	Test condition	Minimum	Typical case	Maximum	Unit
supply current						
Supply current	I _{cc}	DI=0 or VCC		240	400	μA
ESD protect						
A, B, Y, Z		Mannequin (HBM)		±16		KV
Other ports		Mannequin (HBM)		±6		KV
Drive switch characteristics						
Drive input to output propagation delay(low to high)	tDPLH	R _{DIFF} =54 Ω, CL1=CL2=100pF (see Figure 3 and Figure 4)		15	35	ns
Drive input to output propagation delay(high to low)	tDPLH			15	35	ns
tDPLH-tDPLH	tSKEW1			7	10	ns
Rise time /fall time	tDR,tDF			10	25	ns
Acceptor The propagation delay from input to output is from low to high	tRPLH	See Figure 5 and Figure 6 VID 2.0V; The rise and fall time VID is less than 15ns	20	60	90	ns
Acceptor The propagation delay from input to output is from high to low	tRPHL		20	60	90	ns
tRPLH-tRPHL	tSKEW2			7	10	ns
DC electrical characteristics of the driver						
High-level input	V _{IH}	DI	2.0			V
Low level input	V _{IL}	DI			0.8	V
Logic input current	I _{IN1}	DI	-2		2	μA
Differential output of the driver(non-loaded)	V _{oD1}			5		V
Drive differential output	V _{oD2}	Graph 2,RL=27Ω	1.5		VCC	V
		Graph 2,RL=50Ω	2		VCC	
The current output is short-circuited to high	I _{osD1}	Short circuit to 0V~12V	35		250	mA
The current output is short-circuited to low	I _{osD2}	Short circuit to -7V~0V	-250		-35	mA
Change in the amplitude of the output voltage (NOTE1)	ΔV _{oD}	Graph 2,RL=27Ω			0.2	V
Output common mode voltage	V _{oc}	Graph 2,RL=27Ω			3	V
Change in the amplitude of the common-mode output voltage(NOTE1)	ΔV _{oc}	Graph 2,RL=27Ω			0.2	V



Parameter	Symbol	Test condition	Minimum	Typical case	Maximum	Unit
DC electrical characteristics of the receiver						
Positive input threshold voltage	VIT+	$-7V \leq V_{CM} \leq 12V$			+200	mV
Reverse input threshold voltage	VIT-	$7V \leq V_{CM} \leq 12V$	-200			mV
Enter the hysteresis voltage	V _{hys}	$-7V \leq V_{CM} \leq 12V$	10	30		mV
Input current(A,B)	IIN2	VCC=0 or 3.3V VIN=12 V			125	μA
		VCC=0 or 3.3V VIN = -7 V	-100			μA
Three state input leakage current	I _{ozR}	$0.4V < V_o < 2.4V$			±1	μA
Receiver input resistance	RIN	$-7V \leq V_{CM} \leq 12V$	96			kΩ
Receiver short circuit current	I _{osR}	$0V \leq V_o \leq V_{CC}$	±7		±95	mA
High level output voltage	V _{oH}	I _{oUT} =-4mA, V _{ID} =+200 mV	VCC-1.5			V
Low level output voltage	V _{oL}	I _{oUT} =+4mA, V _{ID} =-200 mV			0.4	V

(If not otherwise specified, VCC=3.3V±10%, Temp=TMIN~TMAX, typical value is VCC=+3.3V, Temp = 25)

Test Circuit

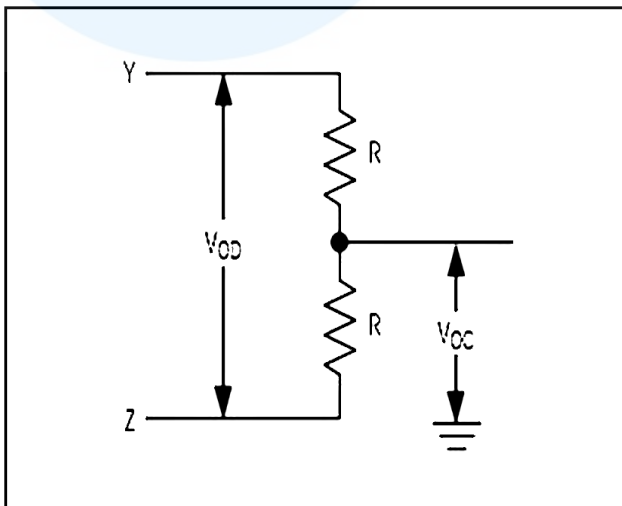


Figure 2 DC test load of the driver

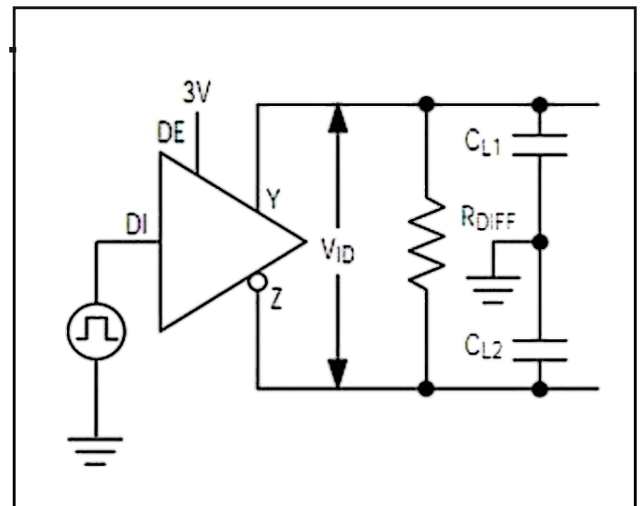


Figure 3 Driver timing test circuit

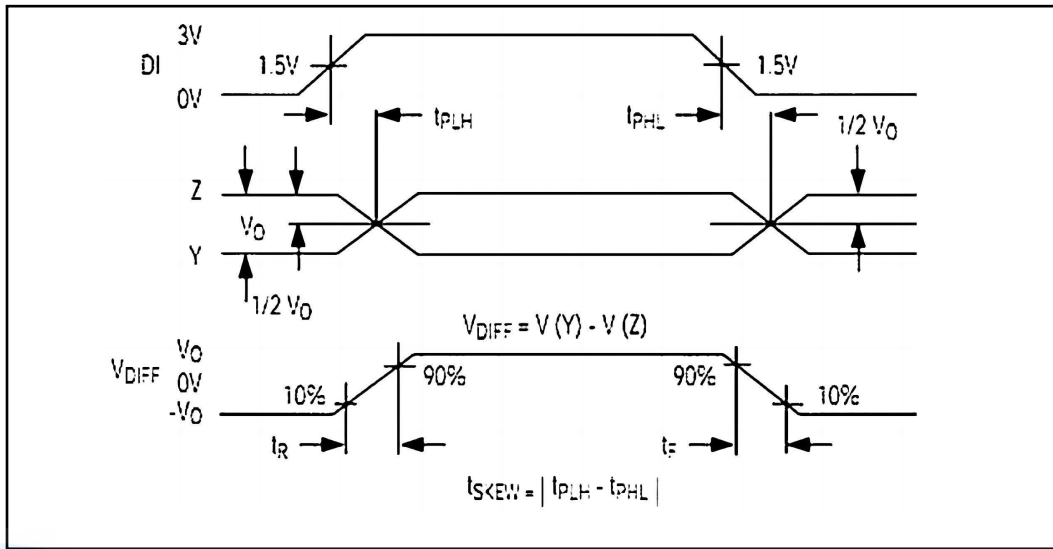


Figure 4 Driver propagation delay

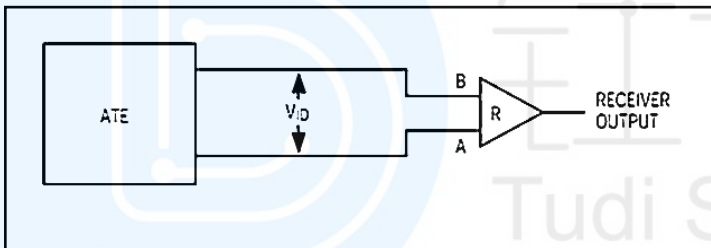


Figure 5 Receiver propagation delay test circuit

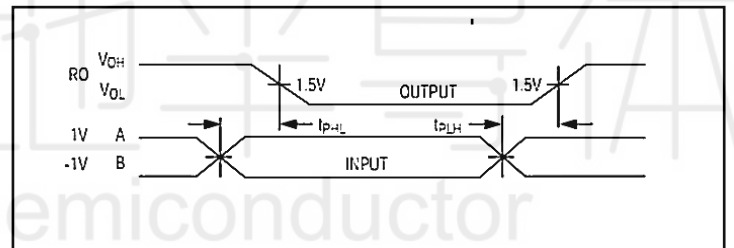


Figure 6 Receiver propagation delay timing

Function table

Send function table					Receiving function table			
input	A-B	$\geq +200\text{mV}$	$\leq -200\text{mV}$	Open/short circuit	input	DI	1	0
					output	Y	H	L
output	RO	H	L	H	output	Z	L	H



Order information




Order Number	Package	Package Quantity	Marking On The park	Temperature
SN65HVD30MDREP-TUDI	SOP8	Tape,Reel,2500	HVD30EP	- 40°C to 125°C



钰地半导体
Tudi Semiconductor



Package SOP8

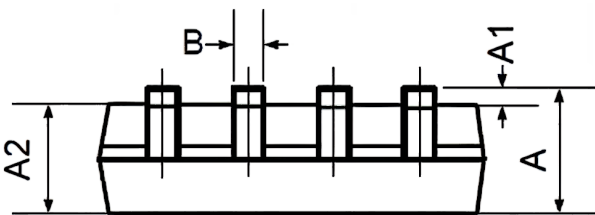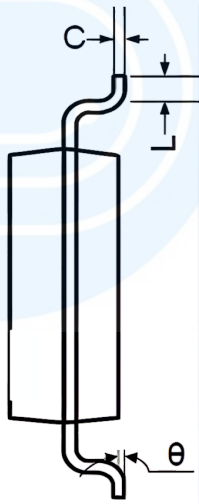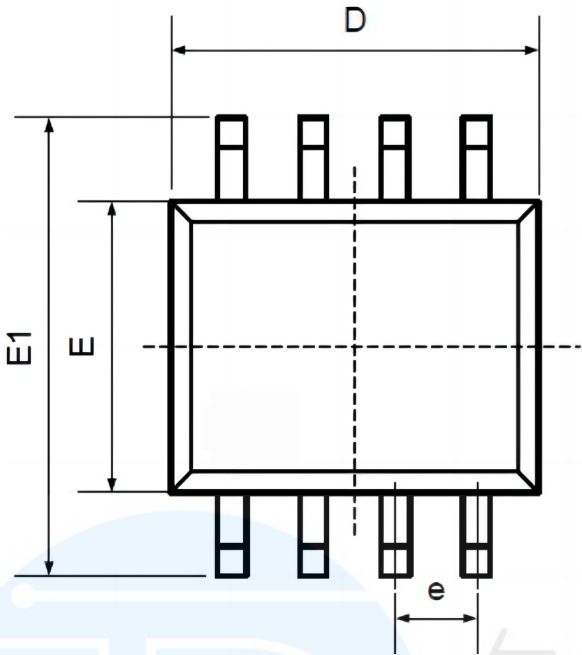

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
B	0.330	0.510	0.013	0.020
C	0.190	0.250	0.007	0.010
D	4.780	5.000	0.188	0.197
E	3.800	4.000	0.150	0.157
E1	5.800	6.300	0.228	0.248
e	1.270TYP		0.050TYP	
L	0.400	1.270	0.016	0.050
theta	0°	8°	0°	8°



Important statement:

- TUDI Semiconductor reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using TUDI Semiconductor products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- TUDI Semiconductor products have not been licensed for life support, military, and aerospace applications, and therefore TUDI Semiconductor is not responsible for any consequences arising from the use of this product in these areas.
- If any or all TUDI Semiconductor products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all TUDI Semiconductor products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- TUDI Semiconductor documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. TUDI Semiconductor assumes no responsibility or liability for altered documents.
- TUDI Semiconductor is committed to becoming the preferred semiconductor brand for customers, and TUDI Semiconductor will strive to provide customers with better performance and better quality products.