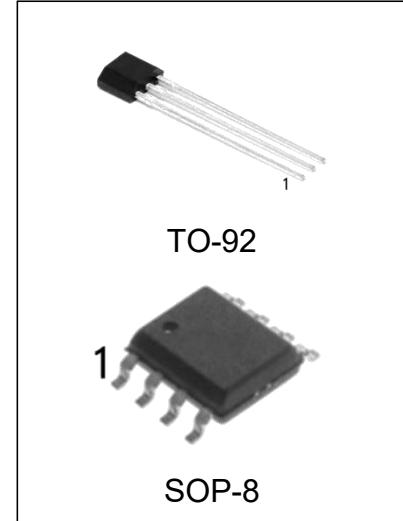


ADJUSTABLE MICROPOWER VOLTAGE REGULATORS WITH SHUTDOWN

FEATURES

- Wide Input Range: up to 30 V
- Rated Output Current of 100 mA
- Low Dropout: 380 mV (Typ) at 100 mA
- Low Quiescent Current: 75 μ A (Typ)
- Tight Line Regulation: 0.03% (Typ)
- Tight Load Regulation: 0.04% (Typ)
- High VO Accuracy
 - 1.4% at 25°C
 - 2% Over Temperature
- Can Be Used as a Regulator or Reference
- Stable With Low ESR ($>12\text{ m}\Omega$) Capacitors
- Current- and Thermal-Limiting Features
- LP2950 Only (3-Pin Package)
 - Fixed-Output Voltages of 5 V, 3.3 V, and 3 V
- LP2951 Only (8-Pin Package)
 - Fixed- or Adjustable-Output Voltages: 5 V/ADJ, 3.3 V/ADJ, and 3 V/ADJ
 - Low-Voltage Error Signal on Falling Output
 - Shutdown Capability
 - Remote Sense Capability for Optimal Output Regulation and Accuracy



ORDERING INFORMATION

DEVICE	PACKAGE TYPE	MARKING	PACKING	PACKING QTY
LP2950-3.0LPG	TO-92	LP2950-3.0	TUBE	1000pcs/box
LP2950-3.3LPG	TO-92	LP2950-3.3	TUBE	1000pcs/box
LP2950-5.0LPG	TO-92	LP2950-5.0	TUBE	1000pcs/box
LP2951-3.0DRG	SOP-8	LP2951-3.0	REEL	2500pcs/reel
LP2951-3.3DRG	SOP-8	LP2951-3.3	REEL	2500pcs/reel
LP2951-5.0DRG	SOP-8	LP2951-5.0	REEL	2500pcs/reel
LP2951DRG	SOP-8	LP2951	REEL	2500pcs/reel
LP2951-3.0DRG4	SOP-8	LP2951-3.0	REEL	4000pcs/reel
LP2951-3.3DRG4	SOP-8	LP2951-3.3	REEL	4000pcs/reel
LP2951-5.0DRG4	SOP-8	LP2951-5.0	REEL	4000pcs/reel
LP2951DRG4	SOP-8	LP2951	REEL	4000pcs/reel

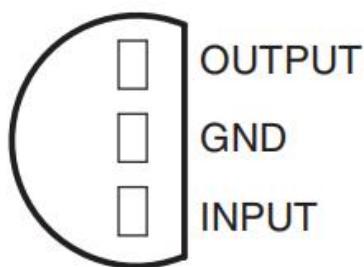
DESCRIPTION

The LP2950 and LP2951 devices are bipolar, low-dropout voltage regulators that can accommodate a wide input supply-voltage range of up to 30 V. The easy-to-use, 3-pin LP2950 is available in fixed-output voltages of 5 V, 3.3 V, and 3 V. However, the 8-pin LP2951 is able to output either a fixed or adjustable output from the same device. By tying the OUTPUT and SENSE pins together, and the FEEDBACK and VTAP pins together, the LP2951 outputs a fixed 5 V, 3.3 V, or 3 V (depending on the version). Alternatively, by leaving the SENSE and VTAP pins open and connecting FEEDBACK to an external resistor divider, the output can be set to any value between 1.235 V to 30 V.

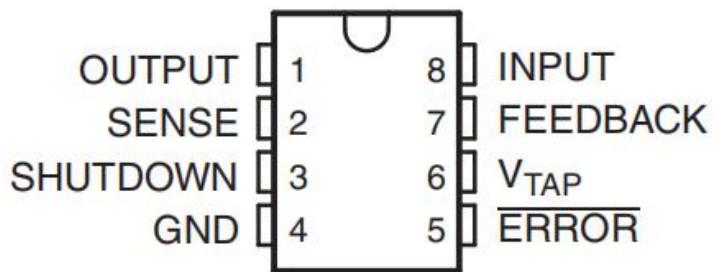
The 8-pin LP2951 also offers additional functionality that makes it particularly suitable for battery-powered applications. For example, a logic-compatible shutdown feature allows the regulator to be put in standby mode for power savings. In addition, there is a built-in supervisor reset function in which the ERROR output goes low when VOUT drops by 6% of its nominal value for whatever reasons – due to a drop in VIN, current limiting, or thermal shutdown.

The LP2950 and LP2951 are designed to minimize all error contributions to the output voltage. With a tight output tolerance (0.5% at 25 °C), a very low output voltage temperature coefficient (20 ppm typical), extremely good line and load regulation (0.3% and 0.4% typical), and remote sensing capability, the parts can be used as either low-power voltage references or 100-mA regulators.

Pin Configuration

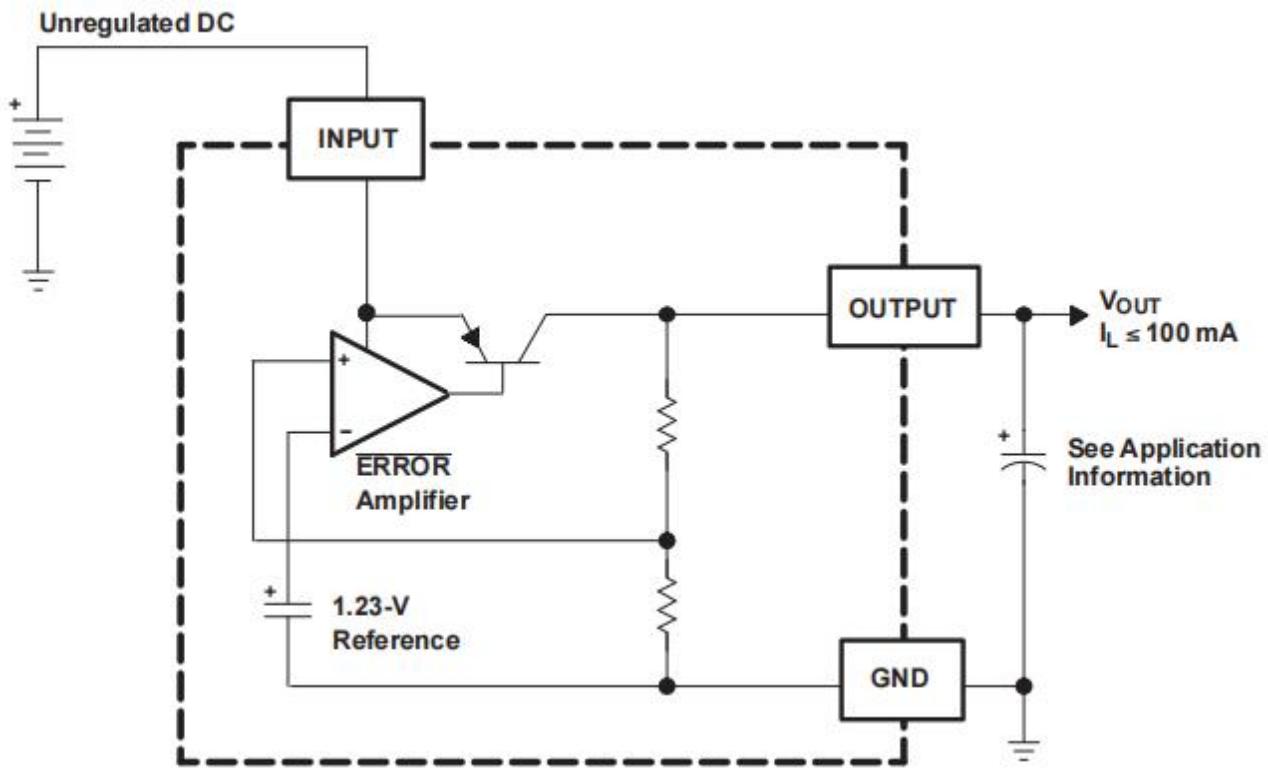


TO-92

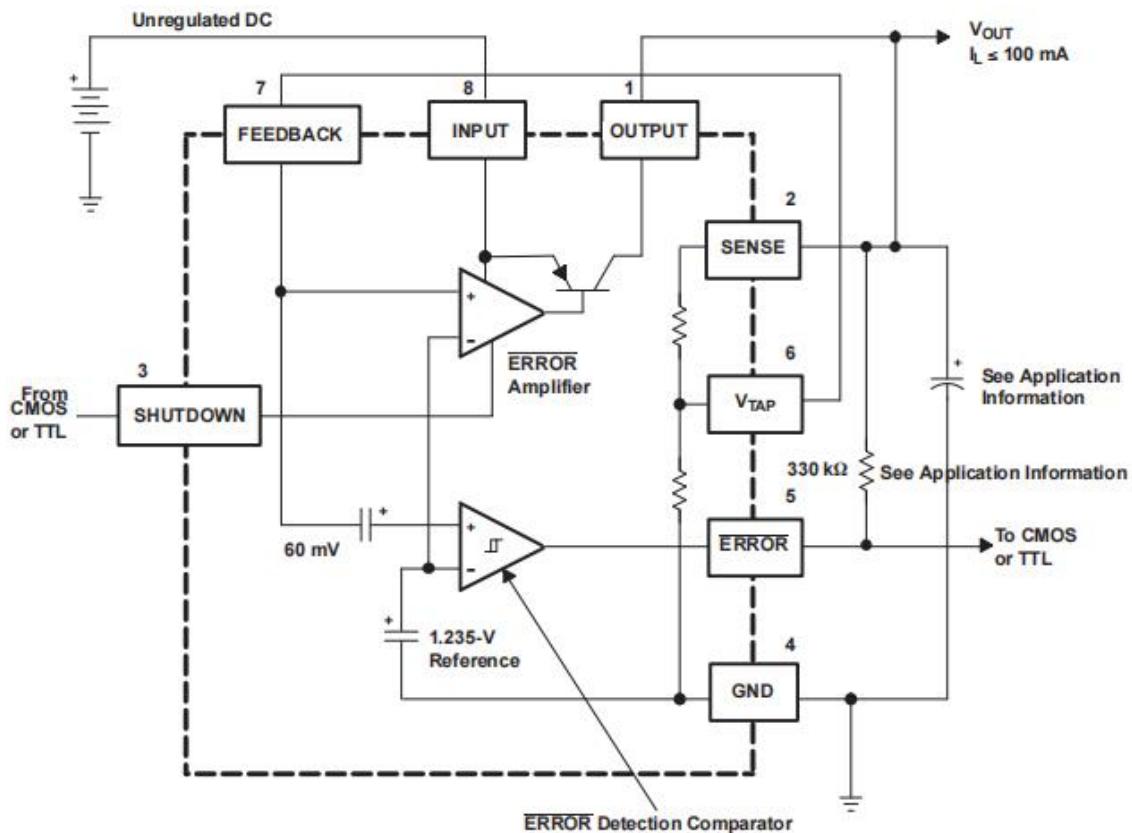


SOP-8

LP2950 FUNCTIONAL BLOCK DIAGRAM



LP2951 FUNCTIONAL BLOCK DIAGRAM



Absolute Maximum Ratings⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
VIN	Continuous input voltage range	-0.3	30	V
VSHDN	SHUTDOWN input voltage range	-1.5	30	V
	ERROR comparator output voltage range(2)	-1.5	30	V
VFDBK	FEEDBACK input voltage range(2)(3)	-1.5	30	V
θJA	Package thermal impedance(4)(5)	SOP8 package	97	°C/W
		TO-92 package	140	
TJ	Operating virtual junction temperature		150	°C
Tstg	Storage temperature range	-65	150	°C
T _L	Lead Temperature (Soldering, 10 seconds)	-	245	°C

1. Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
2. May exceed input supply voltage
3. If load is returned to a negative power supply, the output must be diode clamped to GND.
4. Maximum power dissipation is a function of TJ(max), θJA, and TA. The maximum allowable power dissipation at any allowable ambient temperature is $PD = (TJ(max) - TA)/\theta JA$. Operating at the absolute maximum TJ of 150°C can affect reliability.
5. The package thermal impedance is calculated in accordance with JESD 51-7.

Recommended Operating Conditions

		MIN	MAX	UNIT
VIN	Supply input voltage	(1)	30	V
TJ	Operating virtual junction temperature	-40	125	°C

- (1) Minimum VIN is the greater of:
- 2 V (25°C), 2.3 V (over temperature), or
 - V_{OUT(MAX)} + Dropout (Max) at rated IL

Electrical Characteristics

$V_{IN} = V_{OUT}$ (nominal) + 1 V, $I_L = 100\mu A$, $C_L = 1\mu F$ (5-V versions) or $C_L = 2.2\mu F$ (3-V and 3.3-V versions), 8-pin version: FEEDBACK tied to V_{TAP} , OUTPUT tied to SENSE, $V_{SHUTDOWN} \leq 0.7$ V

PARAMETER	TEST CONDITIONS	TJ	MIN	TYP	MAX	UNIT
3-V VERSION (LP295x-30)						
V _{OUT}	Output voltage IL = 100 μA	25°C	2.970	3	3.030	V
		-40°C to 125°C	2.940	3	3.060	
3.3-V VERSION (LP295x-33)						
V _{OUT}	Output voltage IL = 100 μA	25°C	3.267	3.3	3.333	V
		-40°C to 125°C	3.234	3.3	3.366	
5-V VERSION (LP295x-50)						
V _{OUT}	Output voltage IL = 100 μA	25°C	4.950	5	5.050	V
		-40°C to 125°C	4.900	5	5.100	
ALL VOLTAGE OPTIONS						
Output voltage temperature coefficient(1)	IL = 100 μA	-40°C to 125°C	20	100	ppm/°C	
Line regulation(2)	VIN = [V _{OUT} (NOM) + 1 V] to 30 V	25°C	0.03	0.2	0.4	%/V
		-40°C to 125°C				
Load regulation(2)	IL = 100 μA to 100 mA	25°C	0.04	0.2	0.3	%
		-40°C to 125°C				
VIN - V _{OUT}	Dropout voltage(3)	IL = 100 μA	25°C	50	80	mV
		-40°C to 125°C				
		IL = 100 mA	25°C	380	450	
		-40°C to 125°C				
IGND	GND current	IL = 100 μA	25°C	75	120	μA
		-40°C to 125°C				
		IL = 100 mA	25°C	8	12	mA
		-40°C to 125°C				
Dropout ground current	VIN = V _{OUT} (NOM) - 0.5 V, IL = 100 μA	25°C	110	170	200	μA
		-40°C to 125°C				
Current limit	V _{OUT} = 0 V	25°C	160	200	220	mA
		-40°C to 125°C				
Thermal regulation(4)	IL = 100 μA	25°C	0.05	0.2	0.5	%/W
Output noise (RMS), 10 Hz to 100 kHz	CL = 1 μF (5 V only)	25°C	430			μV
	CL = 200 μF		160			
	LP2951-50: CL = 3.3 μF , CBypass = 0.01 μF between pins 1 and 7		100			
(LP2951-xx) 8-PIN VERSION ONLY ADJ						
Reference voltage	V _{OUT} = V _{REF} to (VIN - 1 V), VIN = 2.3 V to 30 V, IL = 100 μA to 100 mA	25°C	1.218	1.235	1.252	V
		-40°C to 125°C	1.212		1.257	
Reference voltage temperature coefficient(1)		25°C	20	20	20	ppm/°C

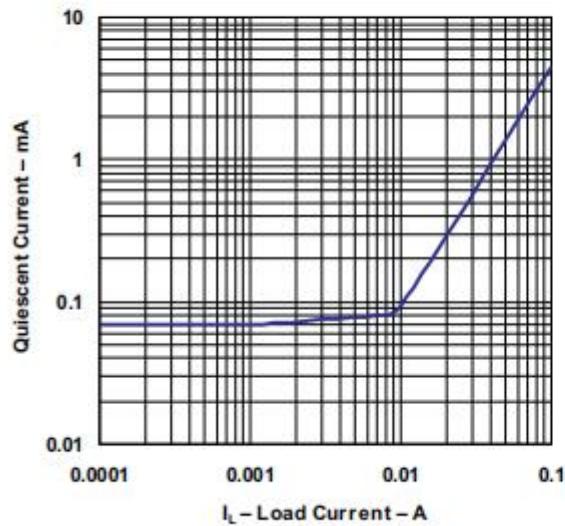
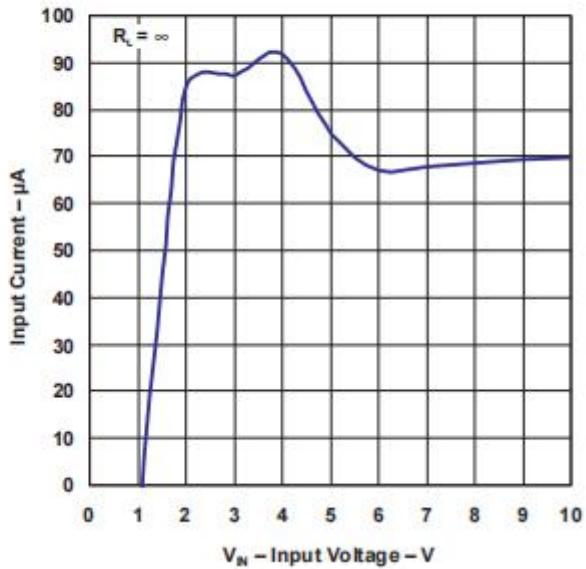
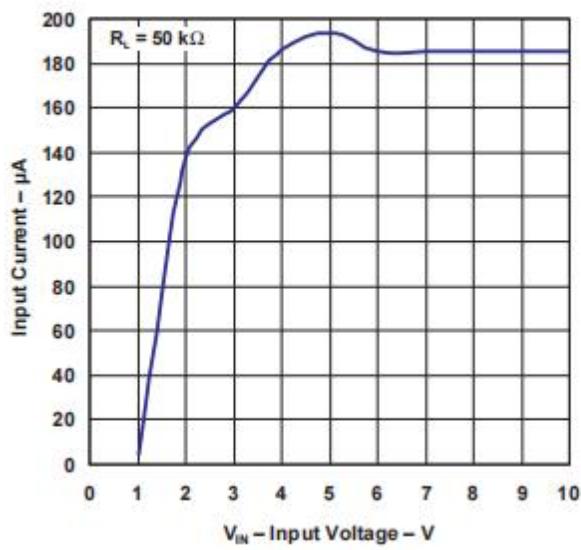
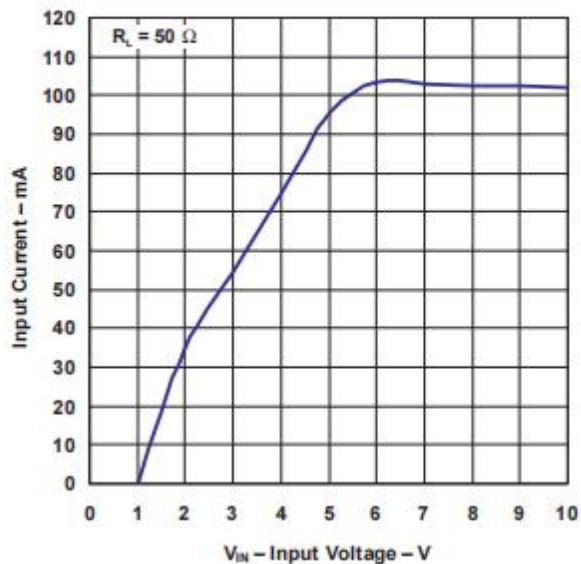
- (1) Output or reference voltage temperature coefficient is defined as the worst-case voltage change divided by the total temperature range.
- (2) Regulation is measured at constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage due to heating effects are covered under the specification for thermal regulation.
- (3) Dropout voltage is defined as the input-to-output differential at which the output voltage drops 100 mV, below the value measured at 1-V differential. The minimum input supply voltage of 2 V (2.3 V over temperature) must be observed.
- (4) Thermal regulation is defined as the change in output voltage at a time (T) after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a 50-mA load pulse at $V_{IN} = 30$ V, $V_{OUT} = 5$ V (1.25-W pulse) for $t = 10$ ms.

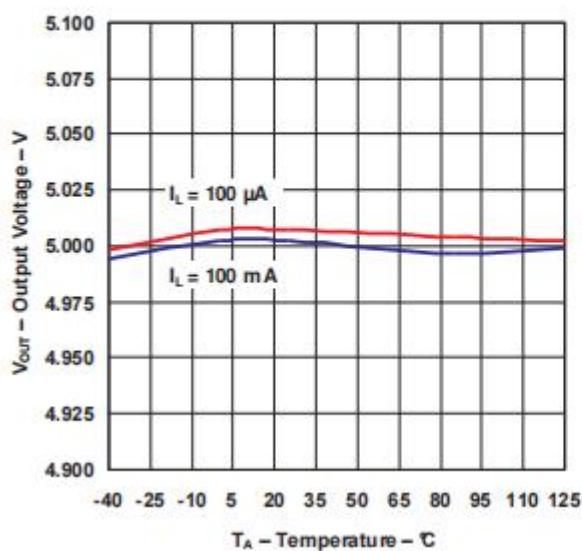
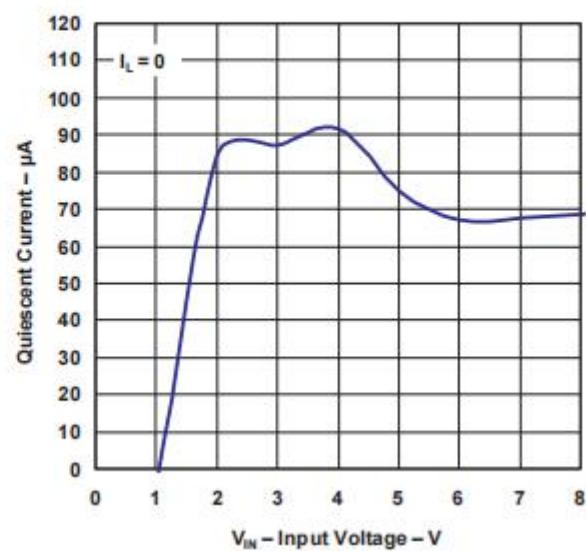
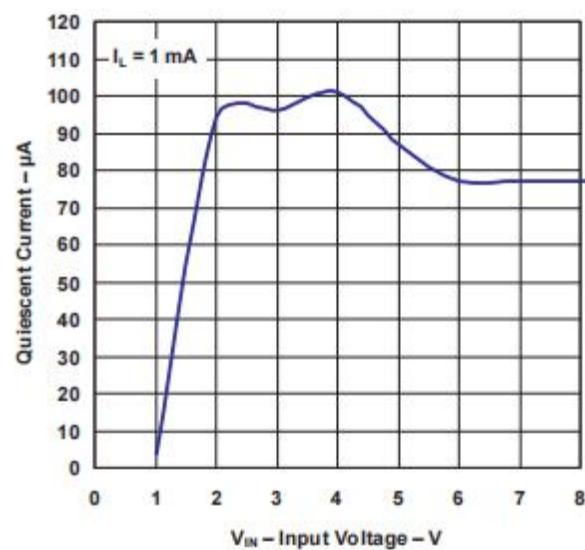
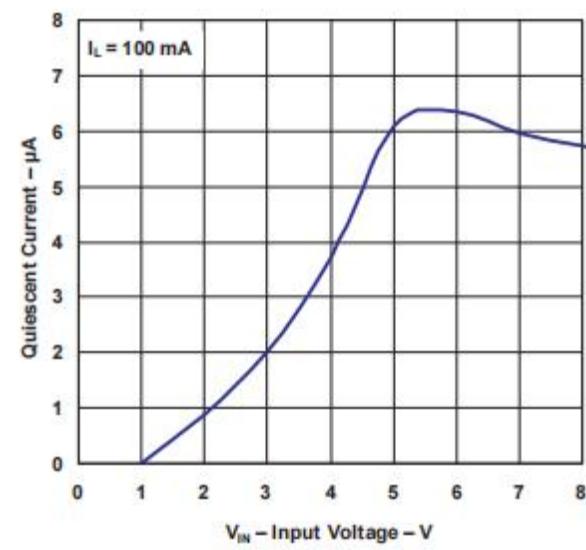
Electrical Characteristics (continued)

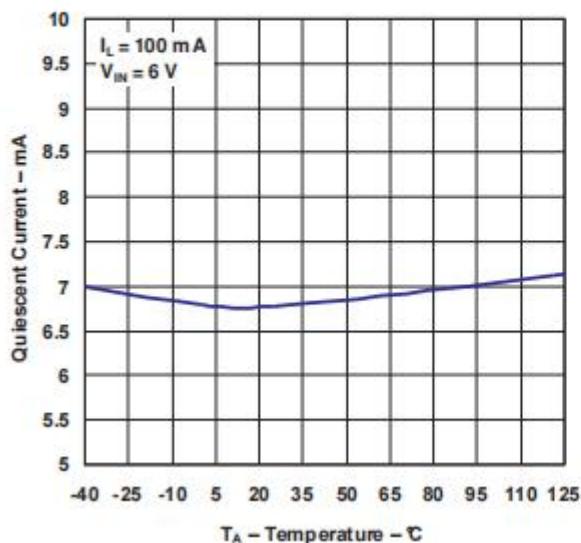
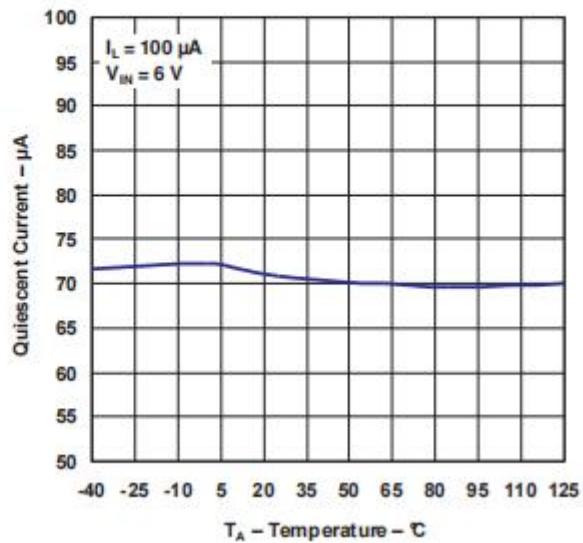
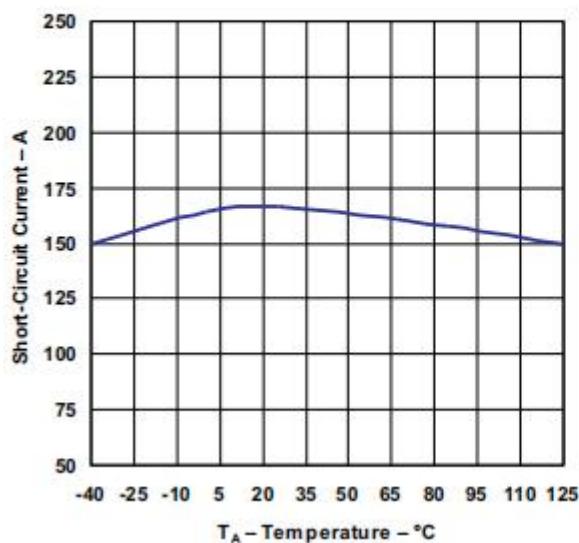
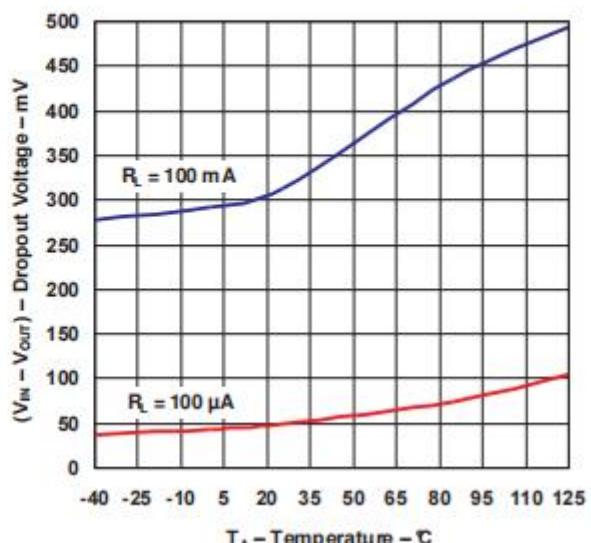
$V_{IN} = V_{OUT}$ (nominal) + 1 V, $I_L = 100\mu A$, $C_L = 1\mu F$ (5-V versions) or $C_L = 2.2\mu F$ (3-V and 3.3-V versions), 8-pin version:
FEEDBACK tied to V_{TAP} , OUTPUT tied to SENSE, $V_{SHUTDOWN} \leq 0.7$ V

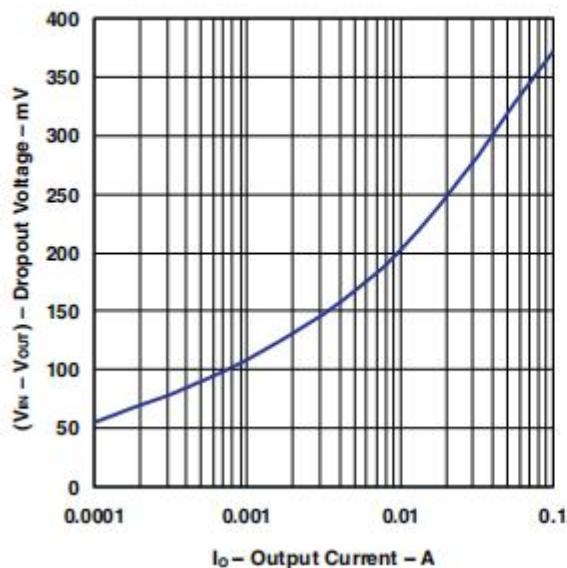
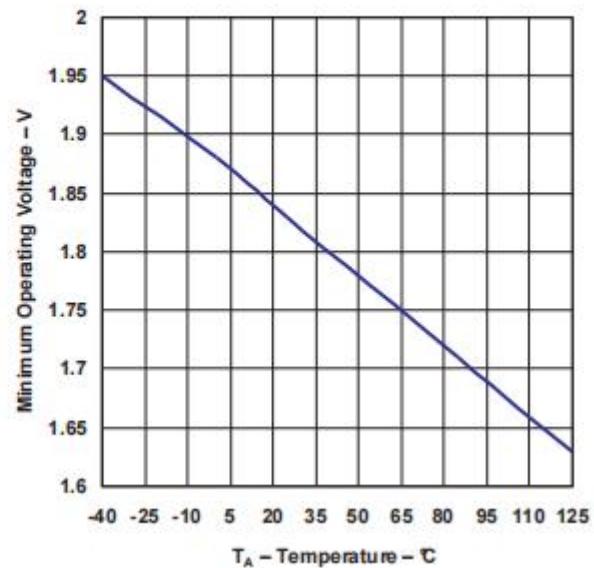
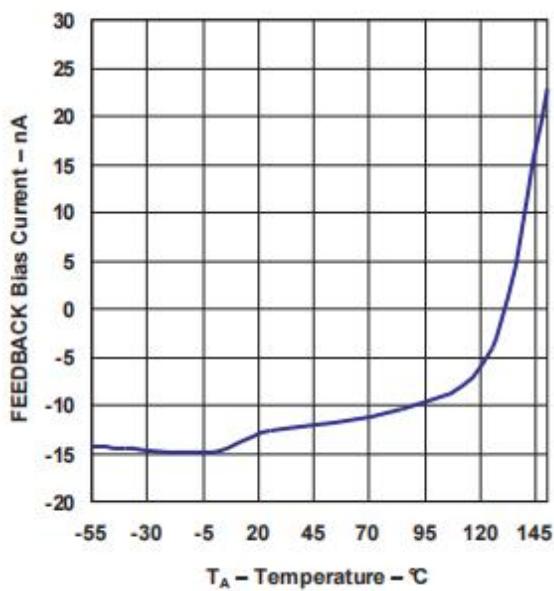
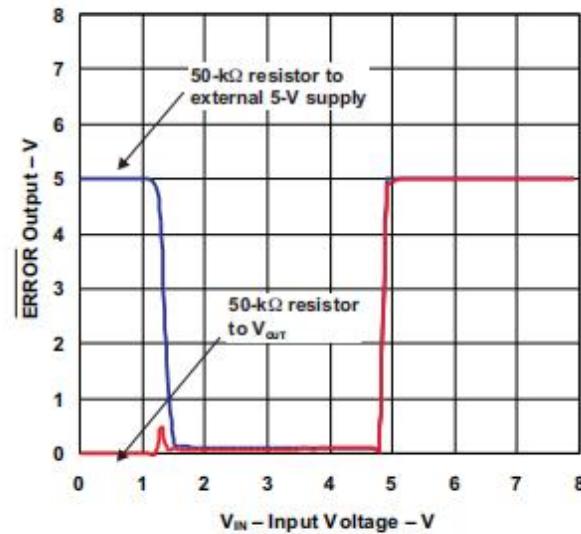
PARAMETER	TEST CONDITIONS	TJ	MIN	TYP	MAX	UNIT
FEEDBACK bias current		25°C	20	40	60	nA
		-40°C to 125°C				
FEEDBACK bias current temperature coefficient		25°C	0.1			nA/°C
ERROR COMPARATOR						
Output leakage current	V _{OUT} = 30 V	25°C	0.01	1	2	μA
		-40°C to 125°C				
Output low voltage	V _{IN} = V _{OUT} (NOM) - 0.5 V, I _{OL} = 400 μA	25°C	150	250	400	mV
		-40°C to 125°C				
Upper threshold voltage (ERROR output high)(5)		25°C	40	60	25	mV
		-40°C to 125°C				
Lower threshold voltage (ERROR output low)(5)		25°C	75	95	140	mV
		-40°C to 125°C				
Hysteresis(6)		25°C	15			mV
SHUTDOWN INPUT						
Input logic voltage	Low (regulator ON)	-40°C to 125°C	0.7	2	V	
	High (regulator OFF)					
SHUTDOWN input current	VTAP = 2.4 V	25°C	30	50	100	μA
		-40°C to 125°C				
	VTAP = 30 V	25°C	450	600	750	
		-40°C to 125°C				
Regulator output current in shutdown	V _{SHUTDOWN} ≥ 2 V, V _{IN} ≤ 30 V, V _{OUT} = 0, FEEDBACK tied to VTAP	25°C	3	10	20	μA
		-40°C to 125°C				

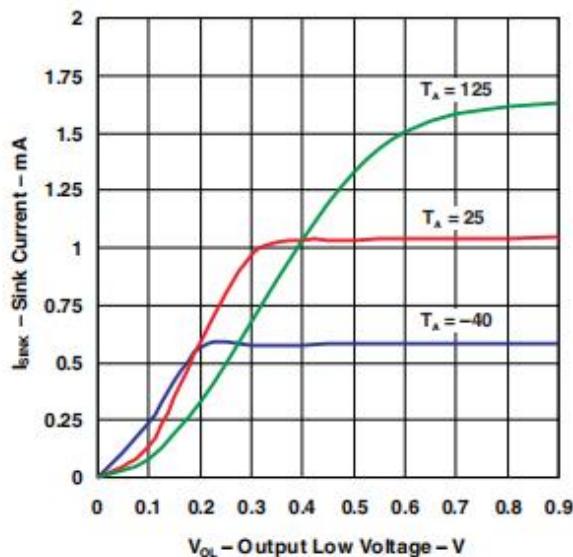
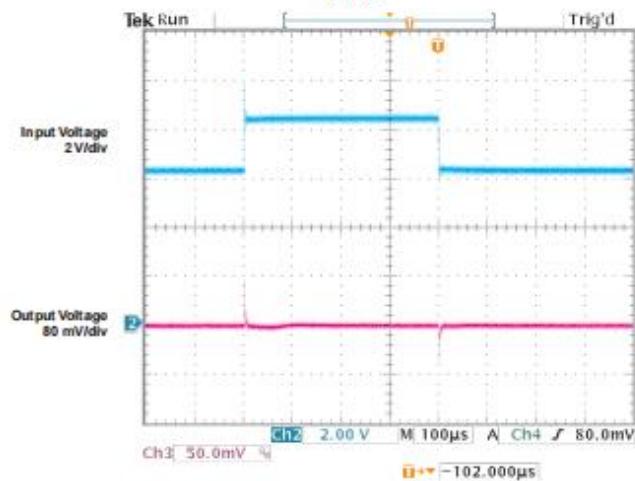
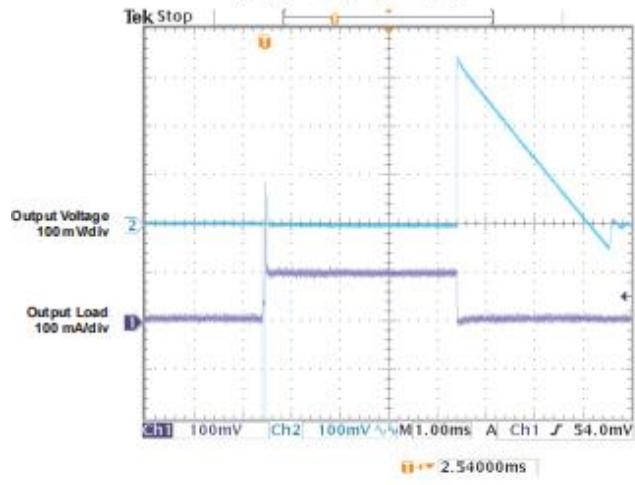
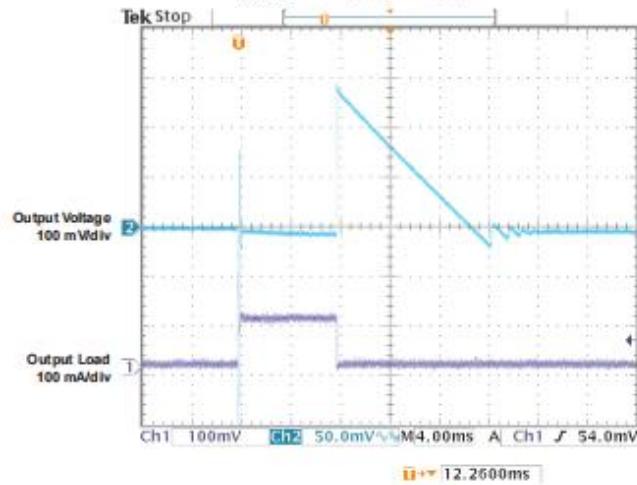
- (5) Comparator thresholds are expressed in terms of a voltage differential equal to the nominal reference voltage (measured at $V_{IN} - V_{OUT} = 1$ V) minus FEEDBACK terminal voltage. To express these thresholds in terms of output voltage change, multiply by the error amplifier gain = $V_{OUT}/V_{REF} = (R1 + R2)/R2$. For example, at a programmed output voltage of 5 V, the ERROR output is specified to go low when the output drops by $95\text{ mV} \times 5\text{ V}/1.235\text{ V} = 384\text{ mV}$. Thresholds remain constant as a percentage of V_{OUT} (as V_{OUT} is varied), with the low-output warning occurring at 6% below nominal (typ) and 7.7% (max).
- (6) Comparator thresholds are expressed in terms of a voltage differential equal to the nominal reference voltage (measured at $V_{IN} - V_{OUT} = 1$ V) minus FEEDBACK terminal voltage. To express these thresholds in terms of output voltage change, multiply by the error amplifier gain = $V_{OUT}/V_{REF} = (R1 + R2)/R2$. For example, at a programmed output voltage of 5 V, the ERROR output is specified to go low when the output drops by $95\text{ mV} \times 5\text{ V}/1.235\text{ V} = 384\text{ mV}$. Thresholds remain constant as a percentage of V_{OUT} (as V_{OUT} is varied), with the low-output warning occurring at 6% below nominal (typ) and 7.7% (max).

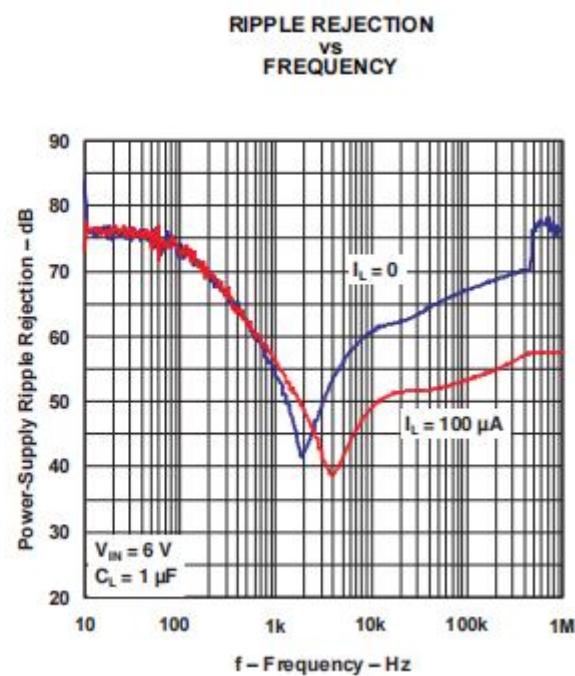
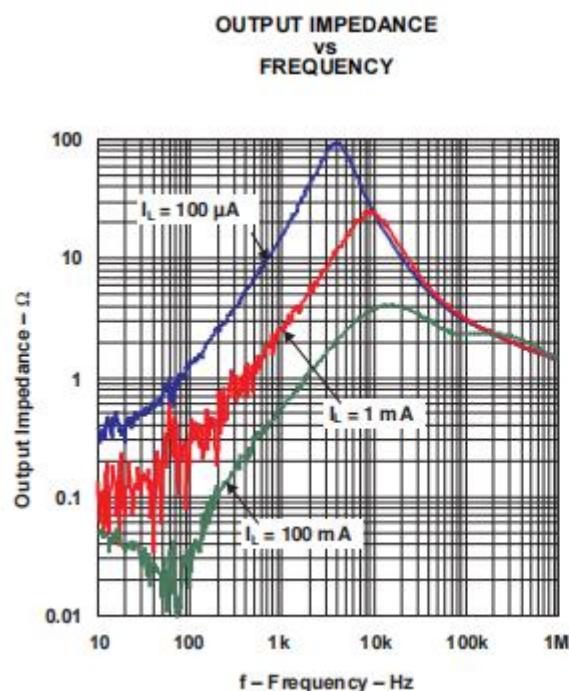
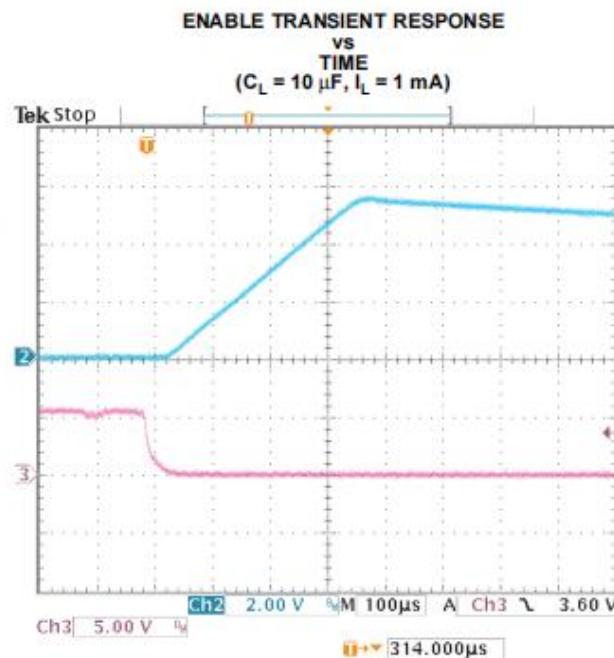
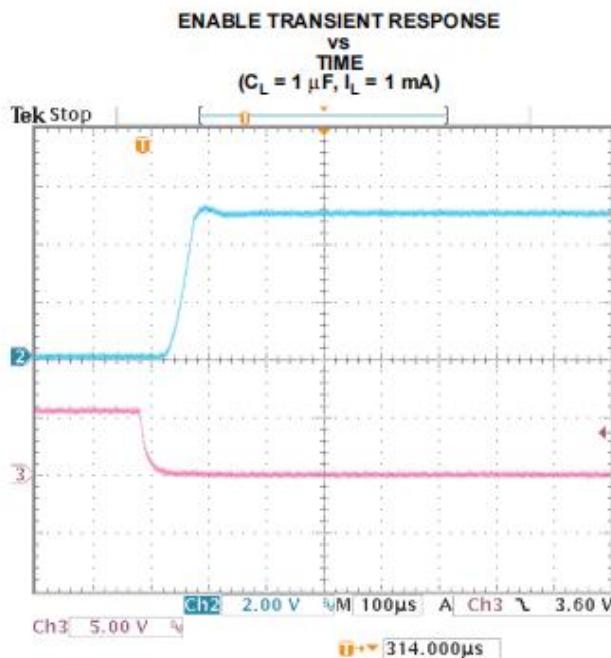
TYPICAL CHARACTERISTICS
**QUIESCENT CURRENT
VS
LOAD CURRENT**

**INPUT CURRENT
VS
INPUT VOLTAGE**

**INPUT CURRENT
VS
INPUT VOLTAGE**

**INPUT CURRENT
VS
INPUT VOLTAGE**


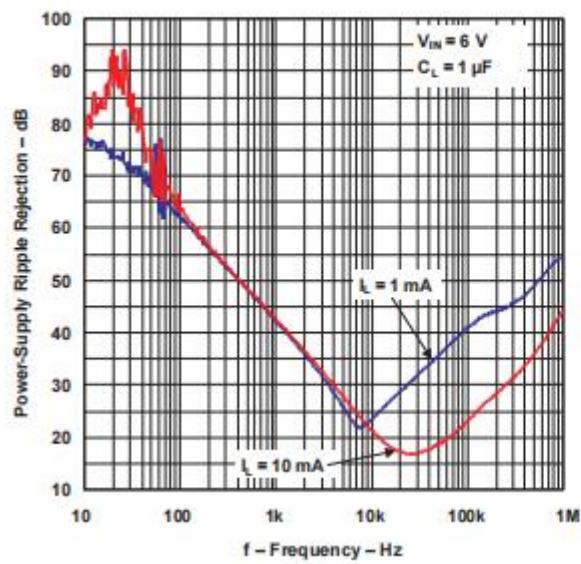
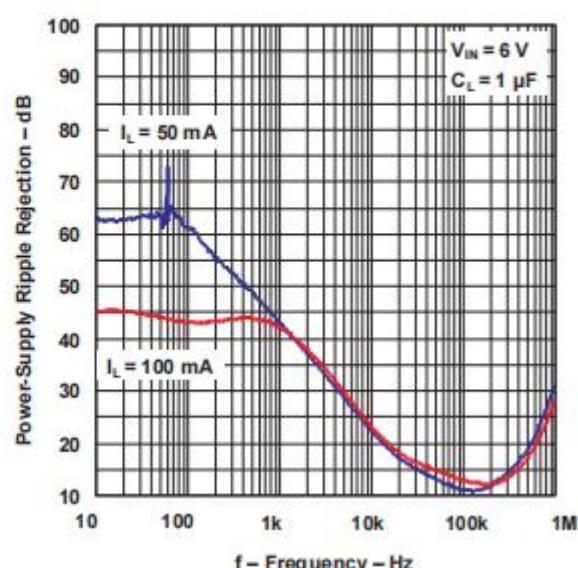
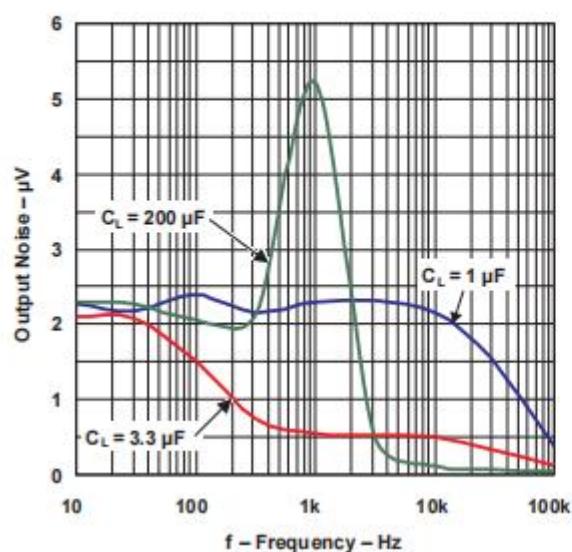
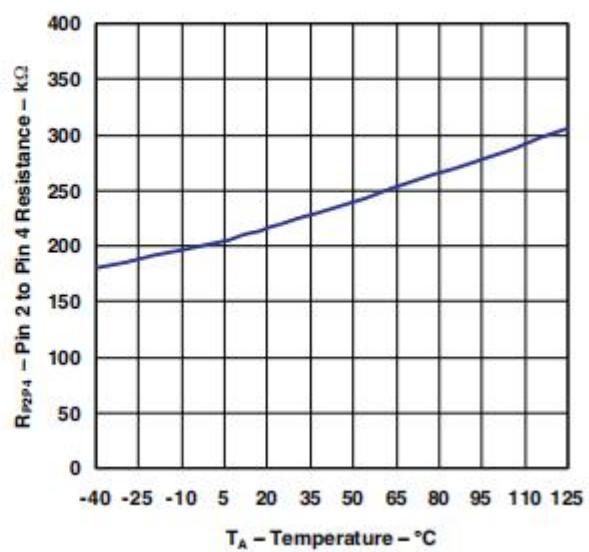
**OUTPUT VOLTAGE
vs
TEMPERATURE**

**QUIESCENT CURRENT
vs
INPUT VOLTAGE**

**QUIESCENT CURRENT
vs
INPUT VOLTAGE**

**QUIESCENT CURRENT
vs
INPUT VOLTAGE**


**QUIESCENT CURRENT
VS
TEMPERATURE**

**QUIESCENT CURRENT
VS
TEMPERATURE**

**SHORT-CIRCUIT CURRENT
VS
TEMPERATURE**

**DROPOUT VOLTAGE
VS
TEMPERATURE**


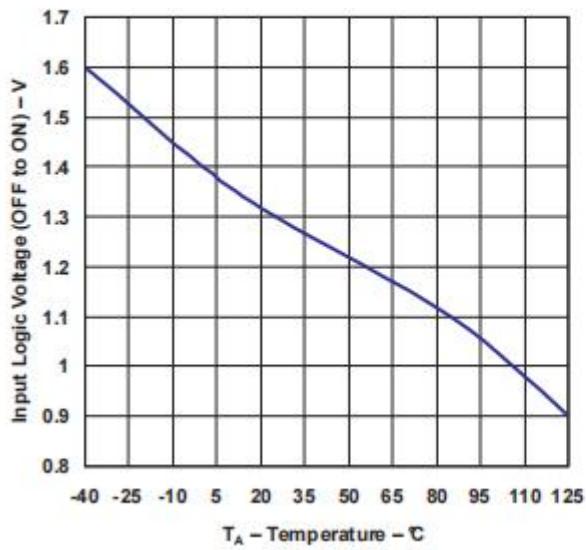
**DROPOUT VOLTAGE
vs
OUTPUT CURRENT**

**LP2951 MINIMUM OPERATING VOLTAGE
vs
TEMPERATURE**

**LP2951 FEEDBACK BIAS CURRENT
vs
TEMPERATURE**

**LP2951 ERROR COMPARATOR OUTPUT
vs
INPUT VOLTAGE**


**LP2951 ERROR COMPARATOR SINK CURRENT
vs
OUTPUT LOW VOLTAGE**

**LINE TRANSIENT RESPONSE
vs
TIME**

**LOAD TRANSIENT RESPONSE
vs
TIME
($V_{OUT} = 5$ V, $C_L = 1 \mu\text{F}$)**

**LOAD TRANSIENT RESPONSE
vs
TIME
($V_{OUT} = 5$ V, $C_L = 10 \mu\text{F}$)**


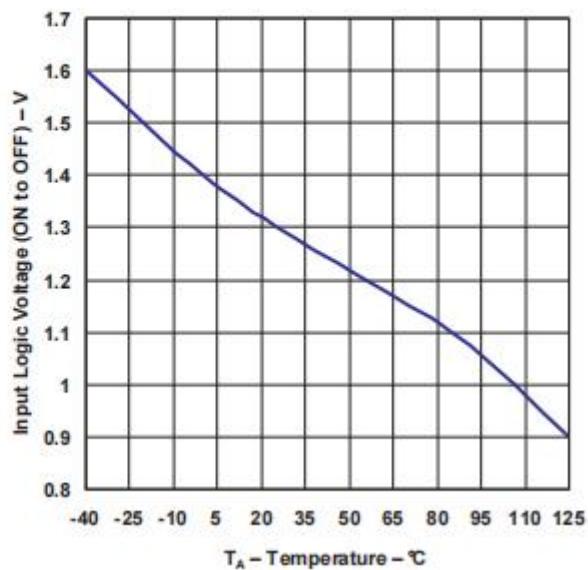


**RIPPLE REJECTION
VS
FREQUENCY**

**RIPPLE REJECTION
VS
FREQUENCY**

**LP2951 OUTPUT NOISE
VS
FREQUENCY**

**LP2951 DIVIDER RESISTANCE
VS
TEMPERATURE**


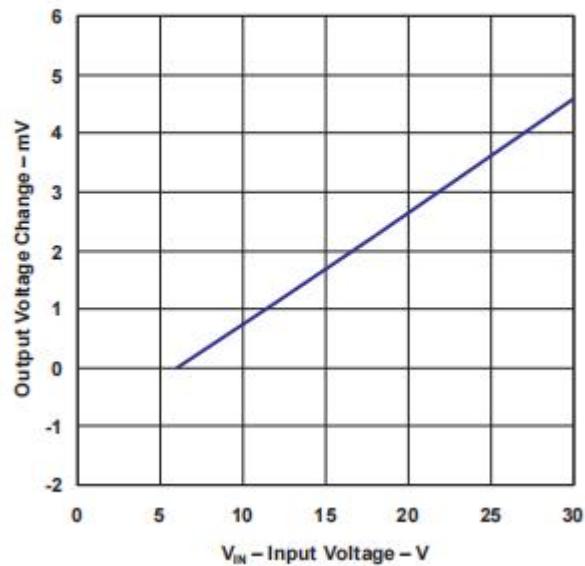
SHUTDOWN THRESHOLD VOLTAGE (OFF TO ON)
vs
TEMPERATURE



SHUTDOWN THRESHOLD VOLTAGE (ON TO OFF)
vs
TEMPERATURE



LINE REGULATION
vs
INPUT VOLTAGE



APPLICATION INFORMATION

Input Capacitor (C_{IN})

A 1- μ F (tantalum, ceramic, or aluminum) electrolytic capacitor should be placed locally at the input of the LP2950 or LP2951 if there is, or will be, significant impedance between the ac filter capacitor and the input; for example, if a battery is used as the input or if the ac filter capacitor is located more than 10 in away. There are no ESR requirements for this capacitor, and the capacitance can be increased without limit.

Output Capacitor (C_{OUT})

As with most PNP LDOs, stability conditions require the output capacitor to have a minimum capacitance and an ESR that falls within a certain range.

Capacitance Value

For $V_{OUT} \geq 5$ V, a minimum of 1 μ F is required. For lower V_{OUT} , the regulator 'sloop gain is running closer to unity gain and, thus, has lower phase margins. Consequently, a larger capacitance is needed for stability. For $V_{OUT} = 3$ V or 3.3 V, a minimum of 2.2 μ F is recommended. For worst case, $V_{OUT} = 1.23$ V (using the ADJ version), a minimum of 3.3 μ F is recommended. C_{OUT} can be increased without limit and only improves the regulator stability and transient response. Regardless of its value, the output capacitor should have a resonant frequency less than 500 kHz.

The minimum capacitance values given above are for maximum load current of 100 mA. If the maximum expected load current is less than 100 mA, then lower values of C_{OUT} can be used. For instance, if $I_{OUT} < 10$ mA, then only 0.33 μ F is required for C_{OUT} . For $I_{OUT} < 1$ mA, 0.1 μ F is sufficient for stability requirements. Thus, for a worst-case condition of 100-mA load and $V_{OUT} = V_{REF} = 1.235$ V (representing the highest load current and lowest loop gain), a minimum C_{OUT} of 3.3 μ F is recommended.

For the LP2950, no load stability is inherent in the design — a desirable feature in CMOS circuits that are put in standby (such as RAM keep-alive applications). If the LP2951 is used with external resistors to set the output voltage, a minimum load current of 1 μ A is recommended through the resistor divider.

ESR Range

The regulator control loop relies on the ESR of the output capacitor to provide a zero to add sufficient phase margin to ensure unconditional regulator stability; this requires the closed-loop gain to intersect the open-loop response in a region where the open-loop gain rolls off at 20 dB/decade. This ensures that the phase always is less than 180° (phase margin greater than 0°) at unity gain. Thus, a minimum-maximum range for the ESR must be observed.

The upper limit of this ESR range is established by the fact that too high an ESR could result in the zero occurring too soon, causing the gain to roll off too slowly, which, in turn allows a third pole to appear before unity gain and introduce enough phase shift to cause instability. This typically limits the max ESR to approximately 5Ω.

Conversely, the lower limit of the ESR is tied to the fact that too low an ESR shifts the zero too far out

(past unity gain) and, thus, allows the gain to roll off at 40 dB/decade at unity gain, with a resulting phase shift of greater than 180°. Typically, this limits the minimum ESR to approximately 20 mΩ to 30 mΩ.

For specific ESR requirements, see [Typical Characteristics](#) .

Capacitor Types

Most tantalum or aluminum electrolytics are suitable for use at the input. Film-type capacitors also work, but at higher cost. When operating at low temperature, care should be taken with aluminum electrolytics, as their electrolytes often freeze at -30°C. For this reason, solid tantalum capacitors should be used at temperatures below -25°C.

Ceramic capacitors can be used, but due to their low ESR (as low as 5 mΩ to 10 mΩ), they may not meet the minimum ESR requirement previously discussed. If a ceramic capacitor is used, a series resistor between 0.1Ω to 2Ω must be added to meet the minimum ESR requirement. In addition, ceramic capacitors have one glaring disadvantage that must be taken into account — a poor temperature coefficient, where the capacitance can vary significantly with temperature. For instance, a large-value ceramic capacitor ($\geq 2.2\mu\text{F}$) can lose more than half of its capacitance as temperature rises from 25°C to 85°C. Thus, a 2.2-μF capacitor at 25°C drops well below the minimum COUT required for stability as ambient temperature rises. For this reason, select an output capacitor that maintains the minimum 2.2-μF required for stability for the entire operating temperature range.

C_{BYPASS}: Noise and Stability Improvement

In the LP2951, an external FEEDBACK pin directly connected to the error amplifier noninverting input can allow stray capacitance to cause instability by shunting the error amplifier feedback to GND, especially at high frequencies. This is worsened if high-value external resistors are used to set the output voltage, because a high resistance allows the stray capacitance to play a more significant role; i.e., a larger RC time delay is introduced between the output of the error amplifier and its FEEDBACK input, leading to more phase shift and lower phase margin. A solution is to add a 100-pF bypass capacitor (CBYPASS) between OUTPUT and FEEDBACK; because CBYPASS is in parallel with R1, it lowers the impedance seen at FEEDBACK at high frequencies, in effect offsetting the effect of the parasitic capacitance by providing more feedback at higher frequencies. More feedback forces the error amplifier to work at a lower loop gain, so COUT should be increased to a minimum of 3.3 μF to improve the regulator 'sphase margin.

CBYPASS can be also used to reduce output noise in the LP2951. This bypass capacitor reduces the closed loop gain of the error amplifier at the high frequency, so noise no longer scales with the output voltage. This improvement is more noticeable with higher output voltages, because loop gain reduction is greatest. A suitable CBYPASS is calculated as shown in Equation 1:

$$f(\text{CBYPASS}) \text{ 200 Hz} \rightarrow \text{CBYPASS} = \frac{1}{2\pi \times R1 \times 200\text{Hz}} \quad (1)$$

On the 3-pin LP2950, noise reduction can be achieved by increasing the output capacitor, which causes the regulator bandwidth to be reduced, therefore, eliminating high-frequency noise. However, this method is relatively inefficient, as increasing COUT from 1μF to 220μF only reduces the regulator 'soutput noise from 430μV to 160μV (over a 100-kHz bandwidth)

ERROR Function (LP2951 Only)

The LP2951 has a low-voltage detection comparator that outputs a logic low when the output voltage drops by $\approx 6\%$ from its nominal value, and outputs a logic high when V_{OUT} has reached $\approx 95\%$ of its nominal value. This 95% of nominal figure is obtained by dividing the built-in offset of ≈ 60 mV by the 1.235-V bandgap reference, and remains independent of the programmed output voltage. For example, the trip-point threshold (ERROR output goes high) typically is 4.75 V for a 5-V output and 11.4 V for a 12-V output. Typically, there is a hysteresis of 15 mV between the thresholds for high and low ERROR output.

A timing diagram is shown in Figure 1 for $\overline{\text{ERROR}}$ vs V_{OUT} (5 V), as V_{IN} is ramped up and down. $\overline{\text{ERROR}}$ becomes valid (low) when $V_{IN} \approx 1.3$ V. When $V_{IN} \approx 5$ V, $V_{OUT} = 4.75$ V, causing $\overline{\text{ERROR}}$ to go high. Because the dropout voltage is load dependent, the output trip-point threshold is reached at different values of V_{IN} , depending on the load current. For instance, at higher load current, $\overline{\text{ERROR}}$ goes high at a slightly higher value of V_{IN} , and vice versa for lower load current. The output-voltage trip point remains at ≈ 4.75 V, regardless of the load. Note that when $V_{IN} \le 1.3$ V, the $\overline{\text{ERROR}}$ comparator output is turned off and pulled high to its pullup voltage. If V_{OUT} is used as the pullup voltage, rather than an external 5-V source, $\overline{\text{ERROR}}$ typically is ≤ 1.2 V. In this condition, an equal resistor divider (10 k Ω is suitable) can be tied to $\overline{\text{ERROR}}$ to divide down the voltage to a valid logic low during any fault condition, while still enabling a logic high during normal operation.

APPLICATION INFORMATION (continued)

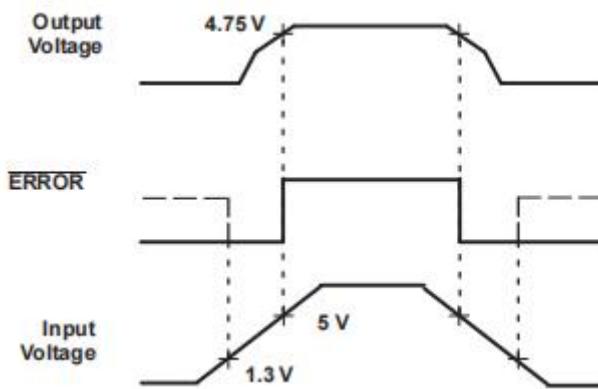


Figure 1. **ERROR** Output Timing

Because the **ERROR** comparator has an open-collector output, an external pullup resistor is required to pull the output up to V_{OUT} or another supply voltage (up to 30 V). The output of the comparator is rated to sink up to 400 μ A. A suitable range of values for the pullup resistor is from 100 k Ω to 1 M Ω . If **ERROR** is not used, it can be left open.

Programming Output Voltage (LP2951 Only)

A unique feature of the LP2951 is its ability to output either a fixed voltage or an adjustable voltage, depending on the external pin connections. To output the internally programmed fixed voltage, tie the **SENSE** pin to the **OUTPUT** pin and the **FEEDBACK** pin to the **VTAP** pin. Alternatively, a user-programmable voltage ranging from the internal 1.235-V reference to a 30-V max can be set by using an external resistor divider pair. The resistor divider is tied to V_{OUT} , and the divided-down voltage is tied directly to **FEEDBACK** for comparison against the internal 1.235-V reference. To satisfy the steady-state condition in which its two inputs are equal, the error amplifier drives the output to equal Equation 2:

$$V_{OUT} = V_{REF} \times \left(1 + \frac{R_1}{R_2}\right) - I_{FB}R_1 \quad (2)$$

Where:

V_{REF} = 1.235 V applied across R_2

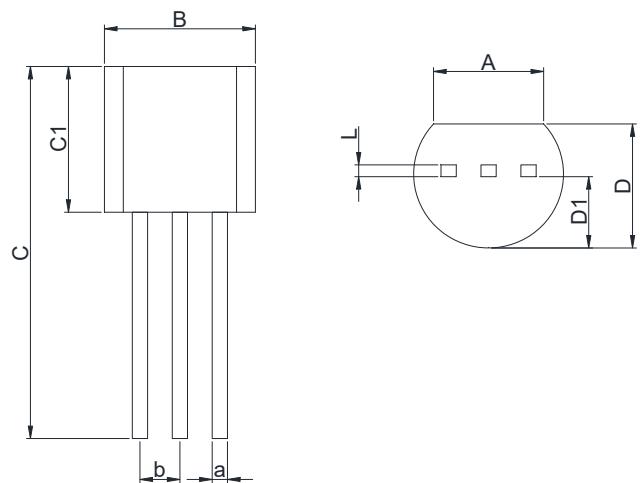
I_{FB} = **FEEDBACK** bias current, typically 20 nA

A minimum regulator output current of $1 \text{-}\infty$ A must be maintained. Thus, in an application where a no-load condition is expected (for example, CMOS circuits in standby), this $1\text{-}\infty$ A minimum current must be provided by the resistor pair, effectively imposing a maximum value of $R_2 = 1.2 \text{ M}\Omega$ ($1.235 \text{ V}/1.2 \text{ M}\Omega \approx 1 \mu\text{A}$).

$I_{FB} = 20 \text{ nA}$ introduces an error of $\approx 0.02\%$ in V_{OUT} . This can be offset by trimming R_1 . Alternatively, increasing the divider current makes I_{FB} less significant, thus, reducing its error contribution. For instance, using $R_2 = 100 \text{ k}\Omega$ reduces the error contribution of I_{FB} to 0.17% by increasing the divider current to $\approx 12 \mu\text{A}$. This increase in the divider current still is small compared to the $600\text{-}\infty$ A typical quiescent current of the LP2951 under no load.

Physical Dimensions

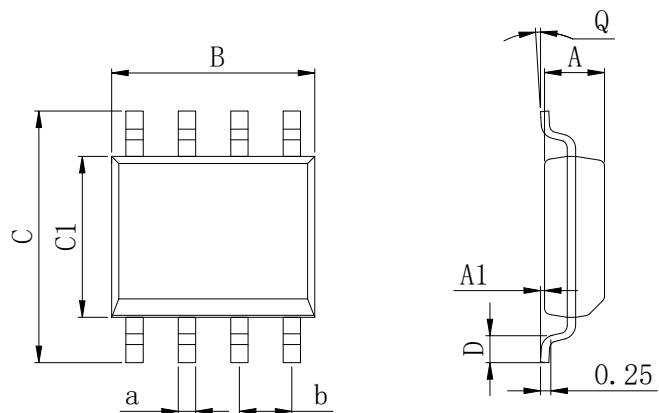
TO-92



Dimensions In Millimeters(TO-92)

Symbol:	A	B	C	C1	D	D1	L	a	b
Min:	3.43	4.44	11.2	4.32	3.17	2.03	0.33	0.40	1.27BSC
Max:	3.83	5.21	12.7	5.34	4.19	2.67	0.42	0.52	

SOP-8 (150mil)



Dimensions In Millimeters(SOP-8)

Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2014-10	New	1-21
V1.1	2023-7	Update encapsulation type、Update Lead Temperature	1、4

IMPORTANT STATEMENT:

Hanschip Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Hanschip Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Hanschip Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Hanschip Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Hanschip Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Hanschip Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Hanschip Semiconductor, and the user shall not claim any compensation liability against Hanschip Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Hanschip Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Hanschip Semiconductor. Not all parameters of each device need to be tested.

The documentation of Hanschip Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Hanschip Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Hanschip Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Hanschip Semiconductor accepts no liability for any loss or damage caused by infringement.