



# EV2759A-Q-00A

## 36V Switching Charger with Power Path Management and Narrow NTC Window for 1-Cell to 6-Cell Batteries Evaluation Board

### DESCRIPTION

The EV2759A-Q-00A is an evaluation board for the MP2759A, a highly integrated switching charger designed for portable devices with 1-cell to 6-cell series Li-ion or Li-polymer battery packs. It can achieve up to 3A of charge current, and supports a variety of battery chemistry types with different full battery voltages.

The MP2759A can operate from a maximum 36V DC input voltage. When an input power supply is present, the MP2759A charges the battery with four phases: trickle charge, pre-charge, constant current (CC) charge, or constant voltage (CV) charge.

To guarantee safe operation, the MP2759A provides robust protection functions, such as battery over-voltage protection (OVP), battery temperature sensing and protection, thermal shutdown, and a charging safety timer.

The MP2759A is available in a QFN-19 (3mmx3mm) package.

### ELECTRICAL SPECIFICATIONS

| Parameter                         | Symbol          | Value                   | Units |
|-----------------------------------|-----------------|-------------------------|-------|
| Input voltage                     | $V_{IN}$        | 10 to 36                | V     |
| Input current                     | $I_{IN}$        | Up to 3                 | A     |
| Battery charge regulation voltage | $V_{BATT\_REG}$ | 3.6 to 4.4 (Adjustable) | V     |
| Fast charge current               | $I_{CC}$        | Up to 3                 | A     |

### FEATURES


- Up to 36V Operation Input Voltage
- Up to 3A Charge Current
- 1-Cell to 6-Cell Series with 3.6V, 4V, 4.1V, 4.15V, 4.2V, 4.35V, or 4.4V Battery Regulation Voltage for Each Cell
- Input Current Limit Regulation
- Minimum Input Voltage Regulation
- Support or Selection Power Path Management
- 0.5% Battery Regulation Voltage Accuracy
- Charge Operation Indicator
- Input Status Indicator
- Battery Over-Voltage Protection (OVP)
- Charging Safety Timer
- Battery Thermal Monitoring and Protection with JEITA Profile

### APPLICATIONS

- Industrial Medical Equipment
- Power Tools
- Robot and Portable Vacuum Cleaners
- Wireless Speakers

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS", the MPS logo, and "Simple, Easy Solutions" are trademarks of Monolithic Power Systems, Inc. or its subsidiaries.


# EV2759A-Q-00A EVALUATION BOARD

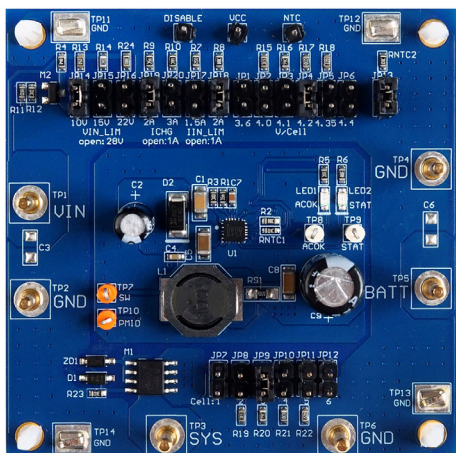

**LxWxH (6.35cmx6.35cmx1.3cm)**

|                     |                      |
|---------------------|----------------------|
| <b>Board Number</b> | <b>MPS IC Number</b> |
| EV2759A-Q-00A       | MP2759AGQ-0000       |

## Efficiency vs. Charge Current

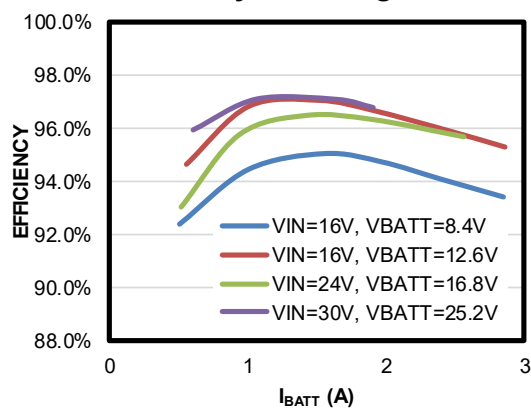

## QUICK START GUIDE

The EV2759A-Q-00A board is designed for the MP2759A, a highly integrated switching charger for 1-cell to 6-cell Li-ion/Li-Polymer batteries that are connected in series. This board's layout accommodates most commonly used capacitors. Table 1 lists the connectors.

**Table 1: Connectors**

| Connectors                            | Description                                      |
|---------------------------------------|--------------------------------------------------|
| TP1/VIN                               | Connect to the input source's positive terminal. |
| TP2/GND                               | Connect to the input source's negative terminal. |
| TP5/BATT                              | Connect to the battery pack's positive terminal. |
| TP4/GND                               | Connect to the battery pack's negative terminal. |
| TP3/SYS                               | Connect to the system load's positive terminal.  |
| TP6/GND                               | Connect to the system load's negative terminal.  |
| TP7/SW                                | Test point for the switching node.               |
| TP10/PMID                             | Test point for PMID.                             |
| DISABLE, VCC, NTC, TP8/ACOK, TP9/STAT | Test connection for related signals.             |
| TP11, TP12, TP13, TP14 / GND          | Test point for ground.                           |

- Connect the system load to the SYS and GND connectors. Ensure that the load's positive and negative terminals are not reverse-connected.
  - Ensure that the maximum system load current does not exceed the input source capacity. If the system load can exceed the input source's output current limit, use a Schottky diode with a sufficient current capacity to bypass the Q1 body diode.
- Connect the battery pack to the BATT and GND connectors. Ensure that the battery's positive and negative terminals are not reverse-connected.
- If using a battery emulator, preset the battery emulator to the correct voltage. Turn the emulator off, connect the emulator to BATT and GND, then turn the emulator's output on.
- Preset the input power source to the correct voltage, then turn the power source off. Connect the power source to VIN and GND, then turn the power source on. The EVB should start charging.
- Ensure that the NTC jumper has been connected to avoid triggering an NTC fault.
- To modify the charging parameters, configure the EVB using the jumpers. Table 2 lists the adjustable parameters.

**Table 2: Adjustable Parameters**

| Adjustable Parameter                   | Value                             | Units |
|----------------------------------------|-----------------------------------|-------|
| Charge current                         | 1, 2, or 3                        | A     |
| Input current limit                    | 1, 1.5, or 2                      | A     |
| Cell numbers                           | 1, 2, 3, 4, 5, or 6               | N/A   |
| Battery regulation voltage (each cell) | 3.6, 4.0, 4.15, 4.2, 4.35, or 4.4 | V     |
| Minimum input voltage limit            | 10, 15, 22, or 28                 | V     |

**Table 3 Jumper Connections**


| Jumpers                         | Description                                          | Configurations                                         | Default     |
|---------------------------------|------------------------------------------------------|--------------------------------------------------------|-------------|
| JP1, JP2, JP3, JP4, JP5, JP6    | Selects the battery regulation voltage for each cell | 3.6V, 4.0V, 4.15V, 4.2V, 4.35V, or 4.4V                | 4.2V        |
| JP7, JP8, JP9, JP10, JP11, JP12 | Selects the battery cell number                      | 1 cell, 2 cells, 3 cells, 4 cells, 5 cells, or 6 cells | 3 cells     |
| JP13                            | NTC divider                                          | Connect to NTC pin (pull up to VCC) or voltage divider | NTC divider |
| JP14, JP15, JP16                | Selects the minimum input voltage limit              | 10V, 15V, 22V, or 28V                                  | 10V         |
| JP17, JP18                      | Selects the input current limit                      | 1A, 1.5A, or 2A                                        | 2A          |
| JP19, JP20                      | Select the constant current charge current           | 1A, 2A, or 3A                                          | 2A          |

This board can work safely under the applications where  $V_{IN} < 20V$ . Table 4 lists the recommended components for applications exceeding 20V.

**Table 4: Component Selections**

| Pin  | Condition                         | Recommendations                                                                                                                                                                                                                                         |
|------|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IN   | $\leq 20V$ input                  | Add a $1\mu F/50V$ ceramic capacitor to the IN pin for adapter applications. Use a minimum $47\mu F$ capacitor for solar applications.                                                                                                                  |
|      | $> 20V$ input                     | Add a $47\mu F/50V$ electrolytic capacitor to the IN pin. Also add a TVS diode if the IN voltage exceeds the pin's maximum voltage rating during the $V_{IN}$ hot-insertion test                                                                        |
| BATT | 1-cell, 2-cell, 3-cell, or 4-cell | Add a $10\mu F/50V$ ceramic capacitor to the BATT pin.                                                                                                                                                                                                  |
|      | 5-cell or 6-cell                  | Add a TVS diode or $\geq 47\mu F$ electrolytic capacitor to the BATT pin.                                                                                                                                                                               |
| PMID | -                                 | Add a $2.2\mu F/50V$ ceramic capacitor (1206 size recommended) to the PMID pin. Connect a 2A/40V Schottky diode from IN to PMID. Add a TVS diode if the PMID voltage exceeds the pin's maximum voltage rating during the $V_{BATT}$ hot-insertion test. |

## EVALUATION BOARD SCHEMATIC

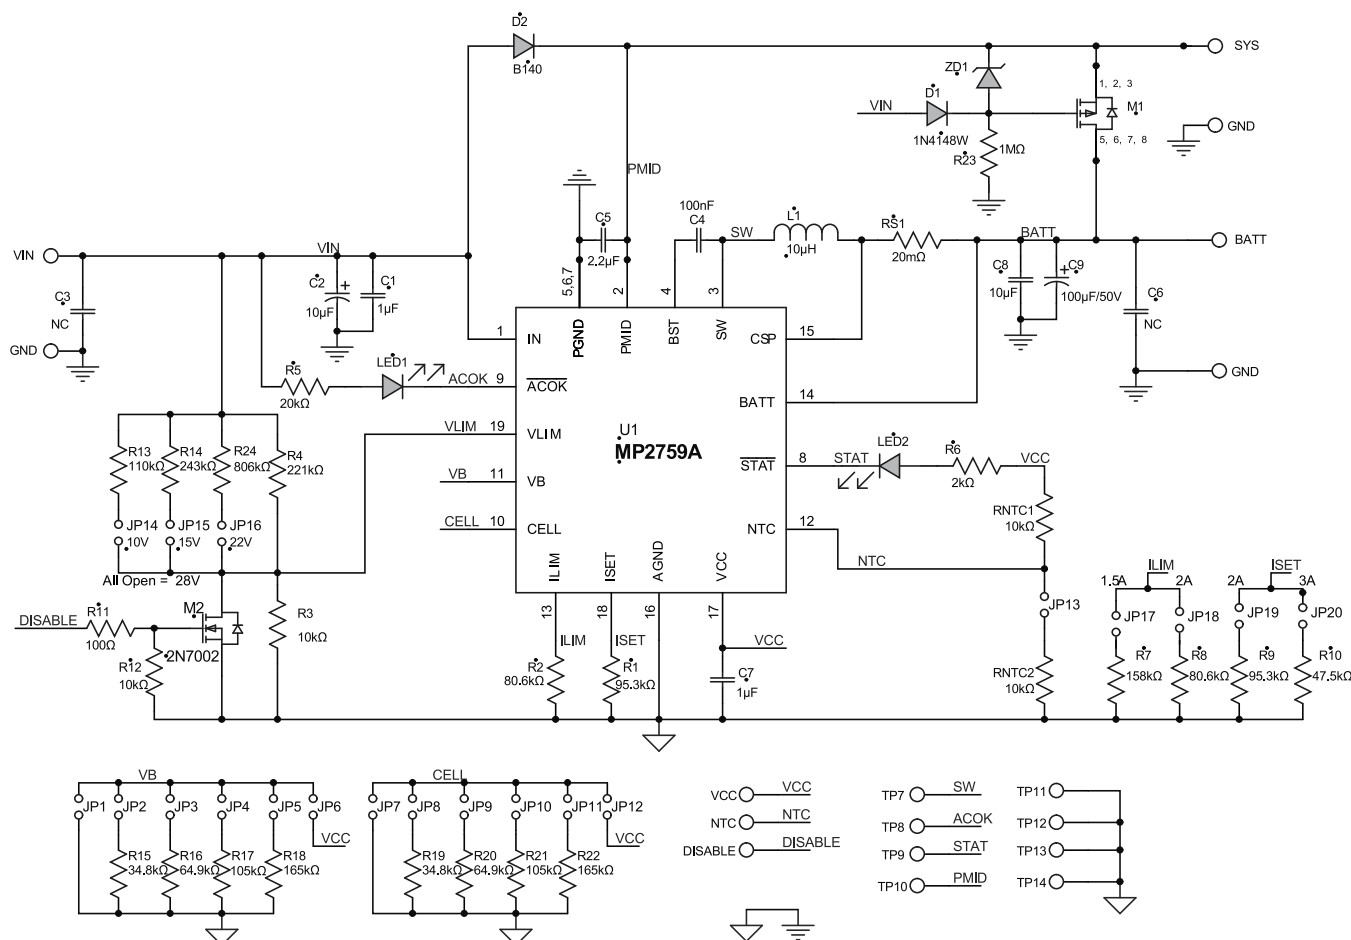

**Figure 1: Evaluation Board Schematic** (1) (2) (3) (4) (5)

### Notes:

- 1) The EV2759A-Q-00A can work safely in applications where  $V_{IN} < 20V$ .
- 2) For applications those exceed 20V, place a  $\geq 47\mu F$  electrolytic capacitor between VIN and GND. Also add a Schottky diode with higher current capacity (e.g. B240A) between VIN and PMID. Use a TVS diode to clamp the VIN voltage if its voltage spike reaches 45V.
- 3) Consider the voltage spike on PMID during battery insertion. Use an extra TVS diode to clamp the PMID voltage if its voltage spike reaches 45V.
- 4) For additional component selection information, refer to the MP2759A datasheet.
- 5) The inductor on this evaluation board can only be used in applications where  $f_{SW} = 700kHz$  and  $I_{CC} < 2.5A$ . For applications where  $f_{SW} = 450kHz$  and  $I_{CC} > 2.5A$ , select an inductor with higher inductance or higher saturation current.

## EV2759A-Q-00A BILL OF MATERIALS

| Qty | Ref              | Value          | Description                              | Package          | Manufacturer | Manufacturer PN    |
|-----|------------------|----------------|------------------------------------------|------------------|--------------|--------------------|
| 1   | C1               | 1 $\mu$ F      | Ceramic capacitor, 50V, X7R              | 1206             | Murata       | GRM31MR71H105KA88L |
| 1   | C2               | 10 $\mu$ F     | Electrolytic capacitor, 50V              | DIP              | Jianghai     | CD287-50V10        |
| 1   | C4               | 100nF          | Ceramic capacitor, 50V, X7R              | 0603             | Murata       | GRM188R71H104KA93D |
| 1   | C5               | 2.2 $\mu$ F    | Ceramic capacitor, 50V, X7R,             | 1206             | Murata       | GRM31CR71H225KA88L |
| 1   | C7               | 1 $\mu$ F      | Ceramic capacitor, 25V, X7R              | 0603             | Murata       | GRM188R71E105KA12D |
| 1   | C8               | 10 $\mu$ F     | Ceramic capacitor, 50V, X5R              | 1206             | Murata       | GRM31CR61H106KA12L |
| 1   | C9               | 100 $\mu$ F    | Electrolytic capacitor, 50V, 100 $\mu$ F | DIP              | Rubycon      | 50YXF100MEFC       |
| 1   | L1               | 10 $\mu$ H     | Inductor, 10 $\mu$ H, 35m $\Omega$ , 4A  | SMD              | Würth        | 744066100          |
| 1   | RS1              | 20m $\Omega$   | Film resistor, 1%                        | 0805             | Yageo        | RL0805FR-070R02L   |
| 2   | R1, R9           | 95.3k $\Omega$ | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-0795K3L   |
| 2   | R2, R8           | 80.6k $\Omega$ | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-0780K6L   |
| 3   | R3, RNTC1, RNTC2 | 10k $\Omega$   | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-0710KL    |
| 1   | R4               | 221k $\Omega$  | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07221KL   |
| 1   | R5               | 20k $\Omega$   | Film resistor, 5%                        | 0603             | Yageo        | CR03T03705NJ20K    |
| 1   | R6               | 2k $\Omega$    | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-072KL     |
| 1   | R7               | 158k $\Omega$  | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07158KL   |
| 1   | R10              | 47.5k $\Omega$ | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-0747K5L   |
| 1   | R11              | 100 $\Omega$   | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07100RL   |
| 1   | R12              | 10k $\Omega$   | Film resistor, 5%                        | 0603             | Yageo        | RC0603JR-0710K     |
| 1   | R13              | 110k $\Omega$  | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07110KL   |
| 1   | R14              | 243k $\Omega$  | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07243KL   |
| 2   | R15, R19         | 34.8k $\Omega$ | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-0734K8L   |
| 2   | R16, R20         | 64.9k $\Omega$ | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-0764K9L   |
| 2   | R17, R21         | 105k $\Omega$  | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07105KL   |
| 2   | R18, R22         | 165k $\Omega$  | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07165KL   |
| 1   | R23              | 1M $\Omega$    | Film resistor, 5%                        | 0603             | Yageo        | RC0603JR-071ML     |
| 1   | R24              | 806k $\Omega$  | Film resistor, 1%                        | 0603             | Yageo        | RC0603FR-07806KL   |
| 1   | LED1             | Red            | LED red                                  | 0805             | Bright LED   | F3D02R-4A          |
| 1   | LED2             | Green          | LED green                                | 0805             | Bright LED   | F3D02HG-1A         |
| 1   | U1               | MP2759A        | Switching charger                        | QFN-19 (3mmx3mm) | MPS          | MP2759AGQ-0000     |
| 1   | M1               | 60V            | P-channel MOSFET, 60V, 23m $\Omega$      | SOIC-8           | Analog Power | AM4417P            |
| 1   | M2               | 60V            | N-channel MOSFET, 60V                    | SOT-23           | Fairchild    | 2N7002MTF          |

**EV2759A-Q-00A BILL OF MATERIALS (continued)**


| Qty | Ref | Value      | Description                    | Package | Manufacturer | Manufacturer PN |
|-----|-----|------------|--------------------------------|---------|--------------|-----------------|
| 1   | D1  | 75V, 0.15A | Diode, 75V, 0.15A              | SOD-123 | Diodes       | 1N4148W         |
| 1   | D2  | 40V, 1A    | Schottky diode, 40V, 1A        | SMA     | Diodes       | B140A           |
| 1   | ZD1 | 11V        | Zener diode, 11V,<br>5mA/500mW | SOD-123 | Diodes       | BZT52C11        |

## EV2759A-Q-00A

Performance curves and waveforms are tested on the evaluation board.  $L = 10\mu\text{H}/35\text{m}\Omega$ ,  $C_{\text{BATT}} = 10\mu\text{F}$ ,  $R_{\text{SNS}} = 20\text{m}\Omega$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.


### Battery Charge Curve

$V_{\text{IN}} = 24\text{V}$ , 3-cell,  $V_{\text{BATT\_REG}} = 4.2\text{V}$ ,  $I_{\text{CC}} = 3\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$

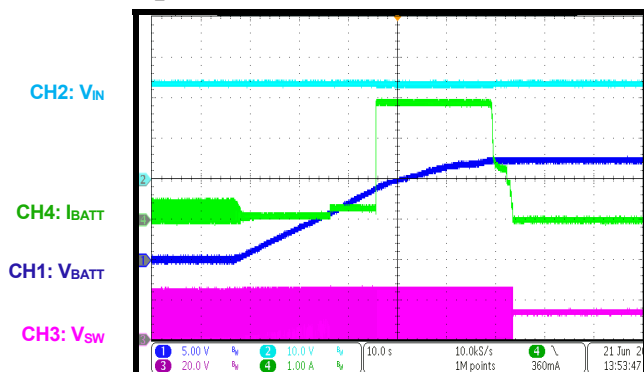


### Steady State

$V_{\text{IN}} = 24\text{V}$ , 4-cell,  $V_{\text{BATT}} = 7\text{V}$ ,  $I_{\text{CC}} = 3\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$ , trickle charge mode

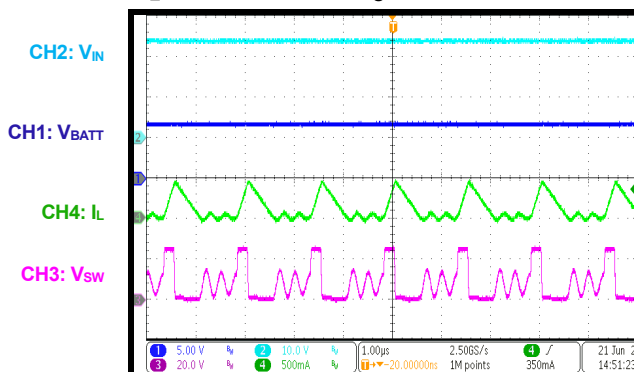


### Steady State

$V_{\text{IN}} = 24\text{V}$ , 4-cell,  $V_{\text{BATT}} = 10\text{V}$ ,  $I_{\text{CC}} = 3\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$ , pre-charge mode

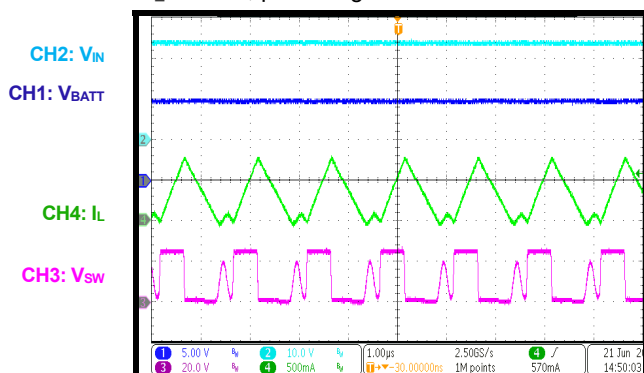


### Steady State

$V_{\text{IN}} = 24\text{V}$ , 4-cell,  $V_{\text{BATT}} = 12\text{V}$ ,  $I_{\text{CC}} = 3\text{A}$ ,  $I_{\text{IN\_LIM}} = 2\text{A}$ , constant current charge mode

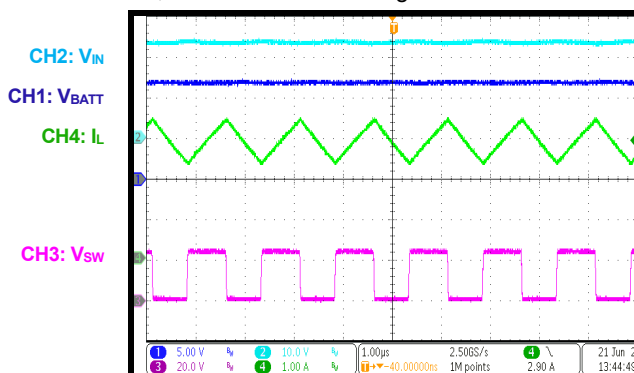


### Steady State

$V_{\text{IN}} = 24\text{V}$ , 4-cell,  $V_{\text{BATT}} = 16.8\text{V}$ ,  $I_{\text{CC}} = 3\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$ , constant voltage charge mode

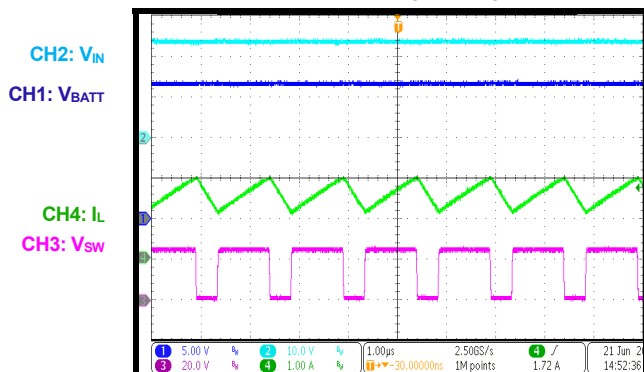

### Start-Up

$V_{\text{IN}} = 18\text{V}$ , 2-cell,  $V_{\text{BATT}} = 8\text{V}$ ,  $I_{\text{CC}} = 2\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$ , constant current charge mode

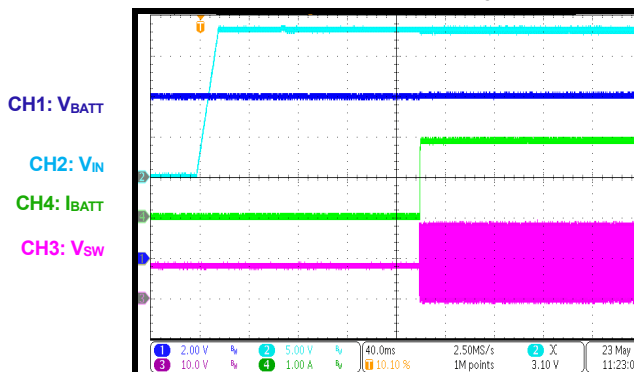


## EVB TEST RESULTS

Performance curves and waveforms are tested on the evaluation board.  $L = 10\mu\text{H}/35\text{m}\Omega$ ,  $C_{\text{BATT}} = 10\mu\text{F}$ ,  $R_{\text{SNS}} = 20\text{m}\Omega$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.


### Shutdown

$V_{\text{IN}} = 18\text{V}$ , 2-cell,  $V_{\text{BATT}} = 8\text{V}$ ,  $I_{\text{CC}} = 2\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$ , constant current charge mode

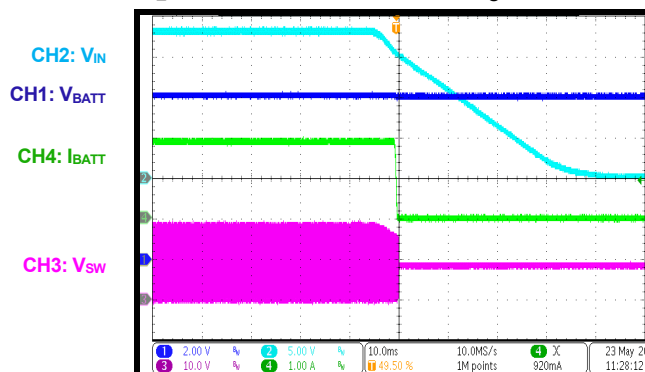


### Start-Up

Power path operation,  $V_{\text{IN}} = 18\text{V}$ , 2-cell,  
 $V_{\text{BATT}} = 8\text{V}$ ,  $I_{\text{CC}} = 2\text{A}$ ,  $I_{\text{IN\_LIM}} = 1\text{A}$ ,  $I_{\text{SYS}} = 0.9\text{A}$

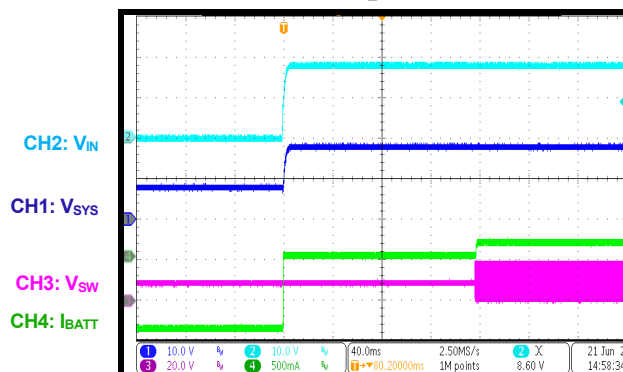


### Shutdown

Power path operation,  $V_{\text{IN}} = 18\text{V}$ , 2-cell,  
 $V_{\text{BATT}} = 8\text{V}$ ,  $I_{\text{CC}} = 2\text{A}$ ,  $I_{\text{IN\_LIM}} = 1\text{A}$ ,  $I_{\text{SYS}} = 0.9\text{A}$

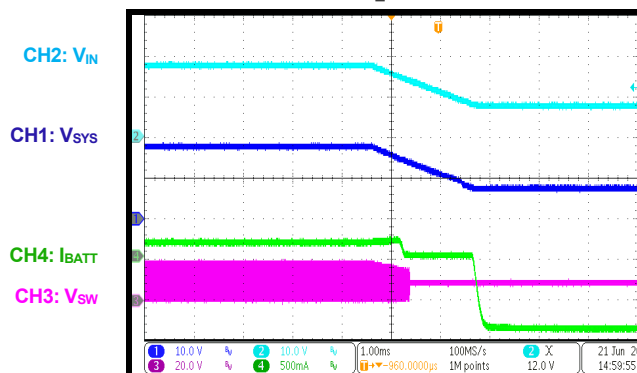


### $I_{\text{IN\_LIM}}$ Loop Control

$V_{\text{IN}} = 24\text{V}$ , 3-cell,  $V_{\text{BATT}} = 10\text{V}$ ,  $I_{\text{CC}} = 3\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 1\text{A}$

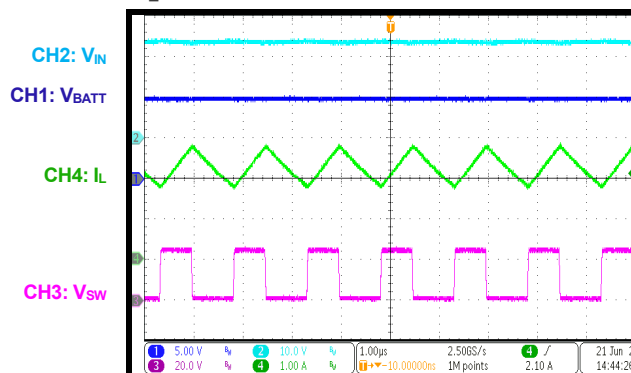


### $V_{\text{IN\_LIM}}$ Loop Control

$V_{\text{IN}} = 24\text{V}/1\text{A}$ , 3-cell,  $V_{\text{BATT}} = 10\text{V}$ ,  $I_{\text{CC}} = 3\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$ ,  $V_{\text{IN\_LIM}} = 15\text{V}$

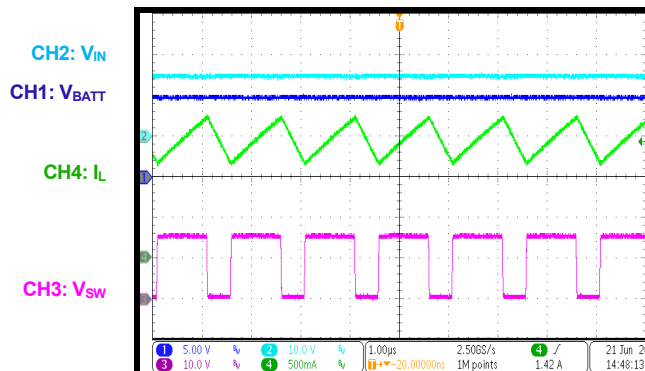

### VLIM On/Off

$V_{\text{IN}} = 18\text{V}$ , 2-cell,  $V_{\text{BATT}} = 8\text{V}$ ,  $I_{\text{CC}} = 2\text{A}$ ,  
 $I_{\text{IN\_LIM}} = 2\text{A}$ ,  $\text{DISABLE} = 5\text{V}/1\text{Hz}$

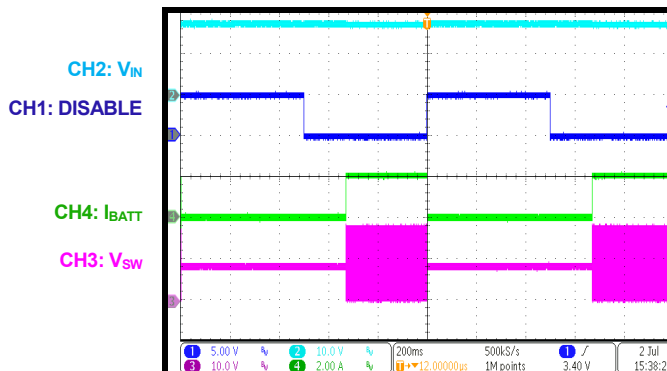

## PCB LAYOUT

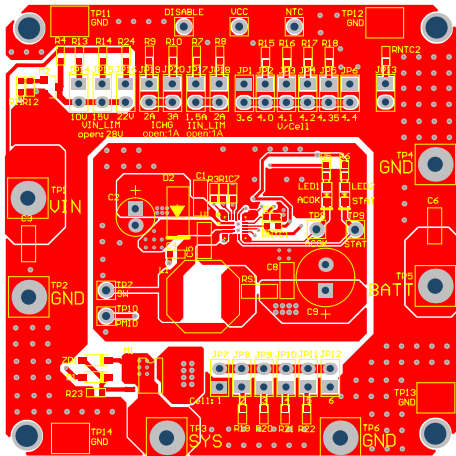


Figure 2: Top Layer

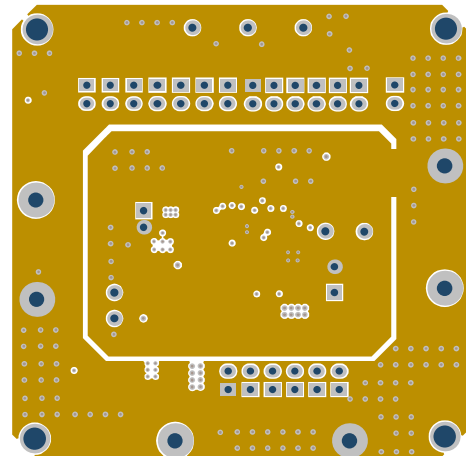


Figure 3: Mid-Layer 1

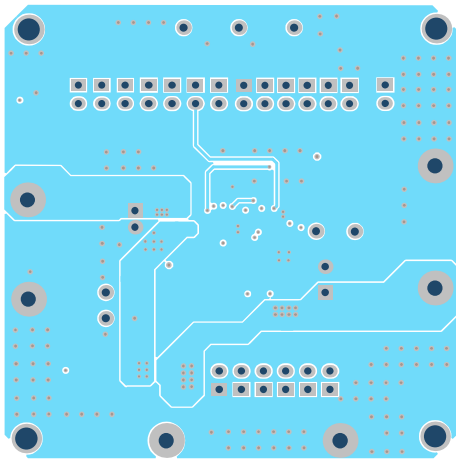


Figure 4: Mid-Layer 2

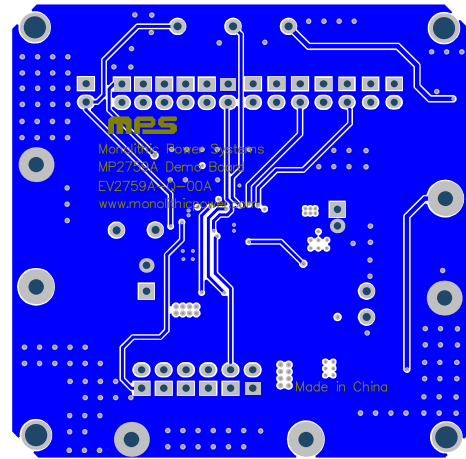


Figure 5: Bottom Layer

## REVISION HISTORY

| Revision # | Revision Date | Description     | Pages Updated |
|------------|---------------|-----------------|---------------|
| 1.0        | 07/29/2021    | Initial Release | -             |

**Notice:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third-party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.