

### DESCRIPTION

The EV2315-J-00A demonstrates MPS's MP2315, a high-frequency, synchronous, rectified, step-down converter with built-in high-side and low-side power MOSFETs. The MP2315 offers a very compact solution to achieve a 3A continuous output current with excellent load and line regulation over a wide input supply range. The MP2315 has synchronous mode operation for higher efficiency over the output current load range.

Current-mode operation provides fast transient response and eases loop stabilization.

Full protection features includes over-current protection and thermal shutdown.

The MP2315 is available in a space-saving 8-pin TSOT23 package.

### ELECTRICAL SPECIFICATION

| Parameter      | Symbol    | Value    | Units |
|----------------|-----------|----------|-------|
| Input Voltage  | $V_{IN}$  | 4.5 – 24 | V     |
| Output Voltage | $V_{OUT}$ | 5        | V     |
| Output Current | $I_{OUT}$ | 3        | A     |

### FEATURES

- Wide 4.5V to 24V Operating Input Range
- 100mΩ/40mΩ Low  $R_{DS(ON)}$  Internal Power MOSFET
- Proprietary Switching-Loss-Reduction Technique
- High-Efficiency Synchronous Mode Operation
- Default 500kHz Switching Frequency
- Synchronizes from a 200kHz-to-2MHz External Clock
- AAM Power-Save Mode
- Internal Soft-Start
- OCP Protection and Hiccup
- Thermal Shutdown
- Output Adjustable from 0.8V
- Available in an 8-pin TSOT-23 Package

### APPLICATIONS

- Notebook System and I/O Power
- Digital Set-Top Boxes
- Flat-Panel Television and Monitors
- Distributed Power Systems

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Products, Quality Assurance page.

"MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.


### EV2315-J-00A EVALUATION BOARD




| Board Number | MPS IC Number |
|--------------|---------------|
| EV2315-J-00A | MP2315GJ      |

### Efficiency

$V_{IN}=6V$  to 24V,  $V_{OUT}=5V$ ,  $R_8=75k$

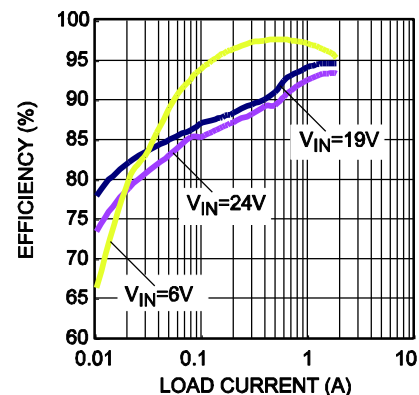

## EVALUATION BOARD SCHEMATIC

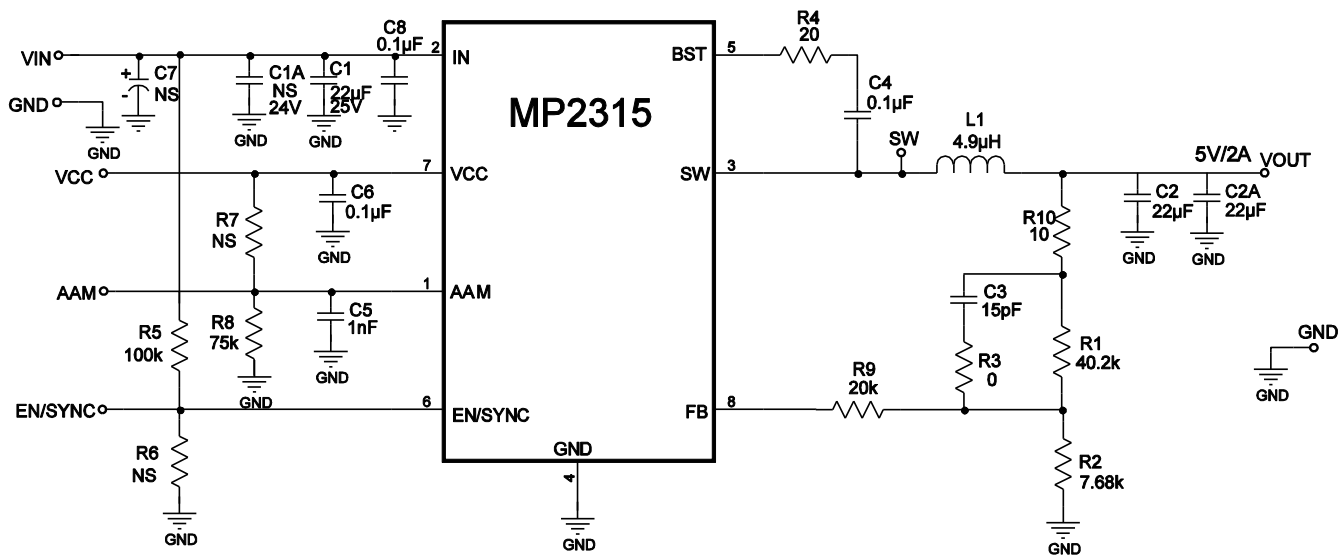

## EV2315-J-00A BILL OF MATERIALS

| Qty | RefDes    | Value    | Description                   | Package  | Manufacturer | Manufacturer P/N   |
|-----|-----------|----------|-------------------------------|----------|--------------|--------------------|
| 1   | C1        | 22μF     | Ceramic Cap., 25V, 10%, X5R   | 1206     | muRata       | GRM31CR61E226KE15L |
| 2   | C1A, C7   | NS       |                               | 1206     |              |                    |
| 2   | C2,C2A    | 22μF     | Ceramic Cap., 10V, X7R        | 1206     | muRata       | GRM21BR60J226ME39L |
| 1   | C3        | 15pF     | Ceramic Cap., 50V, C0G        | 0603     | muRata       | GRM1885C1H390JA01D |
| 3   | C4,C6, C8 | 0.1μF    | Ceramic Cap., 16V, X7R        | 0603     | muRata       | GRM188R71C104KA01D |
| 1   | C5        | 1nF      | Ceramic Cap., 50V, X7R        | 0603     | muRata       | GRM188R71H102KA01D |
| 1   | R1        | 40.2k    | Thick Film Res., 1%           | 0603     | Yageo        | 9C06031A4022FKHFT  |
| 1   | R2        | 7.68k    | Thick Film Res., 1%           | 0603     | Yageo        |                    |
| 1   | R3        | 0Ω       | Thick Film Res., 1%           | 0603     | Yageo        | 9C06031A0R00JLHFT  |
| 1   | R4        | 20Ω      | Thick Film Res., 5%           | 0603     | Yageo        | 9C06031A20R0JLHFT  |
| 1   | R5        | 100k     | Thick Film Res., 1%           | 0603     | Any          |                    |
| 0   | R6,R7     | NS       |                               |          |              |                    |
| 1   | R8        | 75k      | Thick Film Res., 1%           | 0603     | Any          |                    |
| 1   | R9        | 20k      | Thick Film Res., 1%           | 0603     | Any          |                    |
| 1   | R10       | 10Ω      | Thick Film Res., 1%           | 0603     | Yageo        | 9C06031A10R0FKHFT  |
| 1   | L1        | 4.9μH    | Inductor,DCR=22mΩ, Is=6A      | SMD      | Würth        | 744314490          |
| 1   | U1        | MP2315GJ | Synchronous Step-Down Convert | TSOT23-8 | MPS          | MP2315GJ           |


## EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 5V$ ,  $L = 4.9\mu H$ ,  $T_A = 25^\circ C$ , unless otherwise noted.


### Input/Output Ripple

$I_{OUT} = 0A$

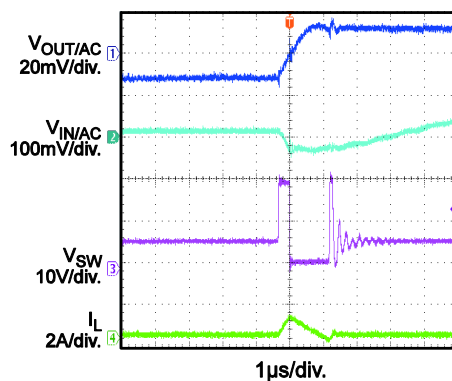

### Input/Output Ripple

$V_{IN} = 19V$ ,  $V_{OUT} = 5V$ ,  $I_{OUT} = 3A$

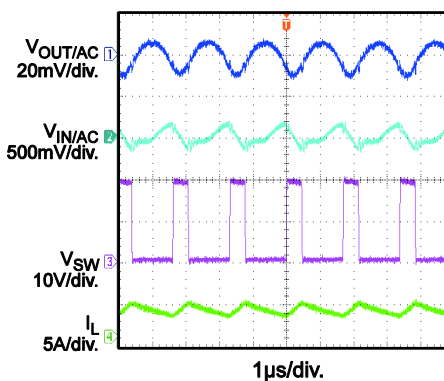

## PRINTED CIRCUIT BOARD LAYOUT

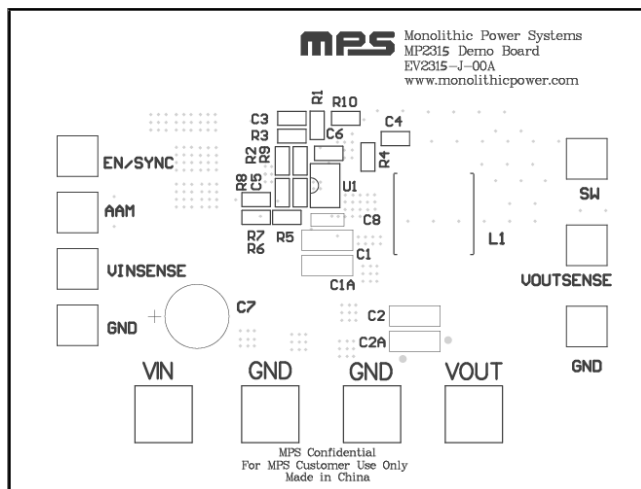


Figure 1—Top Silk Layer

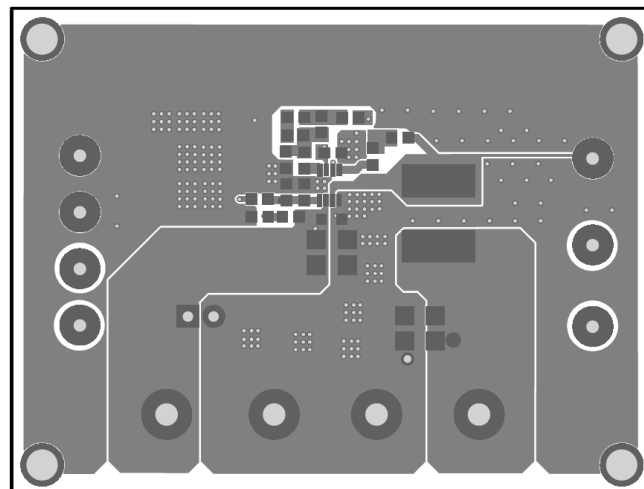


Figure 2—Top Layer

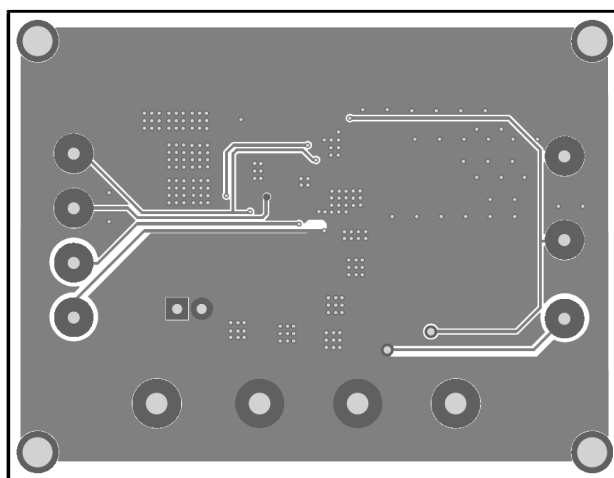


Figure 3—Bottom Layer

## QUICK START GUIDE

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output between 4.5V and 24V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively.
4. Turn the power supply on. The board will automatically start up.
5. To use the Enable function, apply a digital input to the EN/SYNC pin. Drive EN higher than 1.4V to turn on the regulator, or less than 1.25V to turn it off.
6. To use the external synchronous function to adjust the switching frequency, apply an external clock signal to EN/SYNC pin.

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

