

■ 概述

L78XXCV系列为3端正稳压电路,TO-220封装,有不同的固定输出电压,应用范围广。内含过流、过热和过载保护电路。带散热片时,输出电流可达1.2A。虽然是固定稳压电路,但使用外接元件,可获得不同的电压和电流。


■ 主要特点

- 输出电流可达 1.2A, 输出电压有: 5V,6V,8V,9V,10V,12V,15V
- 过热保护
- 短路保护
- 输出晶体管SOA保护。

■ 极限值 (T_a=25°C)

V _I	— 输入电压	35 V
R _{θJC}	— 热阻 (结到壳)	5°C/W
R _{θJA}	— 热阻 (结到空气)	65°C/W
T _{OPR}	— 工作结温范围	0~125°C
T _{STG}	— 贮存温度范围	-65~150°C

■ 外形图及引脚排列

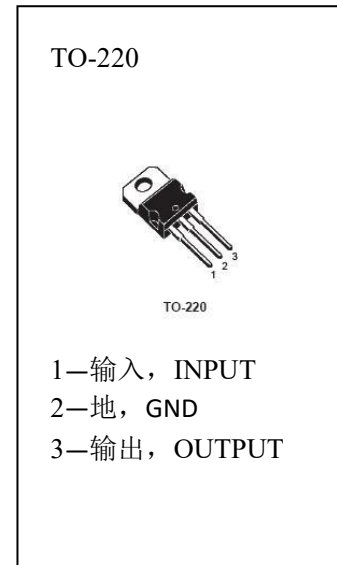


■ 输出电压选型

型号	输出电压	封装类型
L7805CV	5V	TO-220
L7806CV	6V	TO-220
L7808CV	8V	TO-220
L7809CV	9V	TO-220
L7810CV	10V	TO-220
L7812CV	12V	TO-220
L7815CV	15V	TO-220

注: “XX” 代表输出电压

■ 功能框图

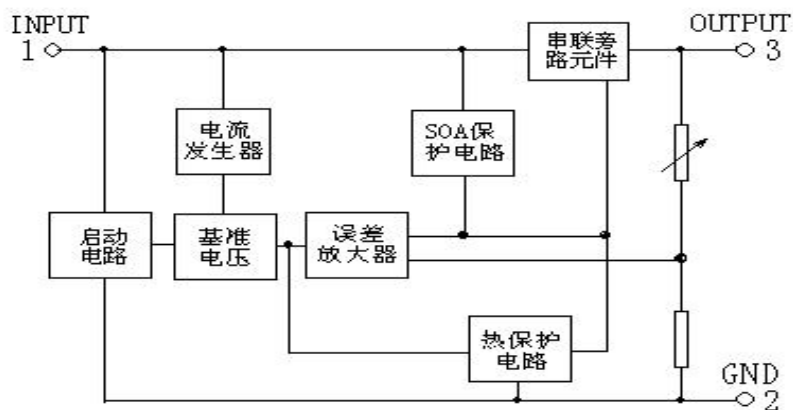

型号: L7805CV

(参见测试电路, 除非另有说明, $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $I_o = 500\text{mA}$, $V_i = 10\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
V_o	输出电压	4.8	5.0	5.2	V	$T_J = 25^{\circ}\text{C}$
		4.75	5.0	5.25		$5.0\text{mA} \leq I_o \leq 1.4\text{A}$, $P_o \leq 15\text{W}$, $12.5\text{V} \leq V_i \leq 25\text{V}$
ΔV_o	电压调整率*		5	50	mV	$T_J = 25^{\circ}\text{C}$, $12.5\text{V} \leq V_i \leq 25\text{V}$
			1.5	25		$T_J = 25^{\circ}\text{C}$, $13\text{V} \leq V_i \leq 20\text{V}$
ΔV_o	负载调整率*		9	100	mV	$T_J = 25^{\circ}\text{C}$, $5.0\text{mA} \leq I_o \leq 1.4\text{A}$
			4	50		$T_J = 25^{\circ}\text{C}$, $250\text{mA} \leq I_o \leq 750\text{mA}$
I_o	静态电流		5	8	mA	$T_J = 25^{\circ}\text{C}$
ΔI_o	静态电流变化率			0.5	mA	$5\text{mA} \leq I_o \leq 1.4\text{A}$
				0.8		$12.5\text{V} \leq V_i \leq 29\text{V}$
$\Delta V_o / \Delta T$	输出电压温度系数		-0.8		mV/ $^{\circ}\text{C}$	$I_o = 5\text{mA}$
V_N	输出噪声电压		42		μV	$T_A = 25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{kHz}$
RR	纹波抑制比	62	73		dB	$f = 120\text{Hz}$, $14\text{V} \leq V_i \leq 24\text{V}$
V_D	下降电压		2		V	$I_o = 1\text{A}$, $T_J = 25^{\circ}\text{C}$
R_o	输出阻抗		15		m Ω	$f = 1\text{kHz}$
I_{sc}	短路电流		230		mA	$V_i = 35\text{V}$, $T_A = 25^{\circ}\text{C}$
I_{PK}	峰值电流		2.2		A	$T_J = 25^{\circ}\text{C}$

型号: L7806CV

(参见测试电路, 除非另有说明, $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_i=11\text{V}$, $C_1=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
V_o	输出电压	5.75	6.0	6.25	V	$T_J=25^{\circ}\text{C}$
		5.7	6.0	6.3		$5.0\text{mA} \leq I_o \leq 1.2\text{A}$, $P_o \leq 15\text{W}$, $8\text{V} \leq V_i \leq 21\text{V}$
ΔV_o	电压调整率*		5	120	mV	$T_J=25^{\circ}\text{C}$, $8\text{V} \leq V_i \leq 25\text{V}$
			1.5	60		$T_J=25^{\circ}\text{C}$, $9\text{V} \leq V_i \leq 13\text{V}$
ΔV_o	负载调整率*		9	120	mV	$T_J=25^{\circ}\text{C}$, $5.0\text{mA} \leq I_o \leq 1.5\text{A}$
			3	60		$T_J=25^{\circ}\text{C}$, $250\text{mA} \leq I_o \leq 750\text{mA}$
I_o	静态电流		5	8	mA	$T_J=25^{\circ}\text{C}$
ΔI_o	静态电流变化率			0.5	mA	$5\text{mA} \leq I_o \leq 1.2\text{A}$
				1.3		$8\text{V} \leq V_i \leq 25\text{V}$
$\Delta V_o/\Delta T$	输出电压温度系数		-0.8		mV/ $^{\circ}\text{C}$	$I_o=5\text{mA}$
V_N	输出噪声电压		45		μV	$T_A=25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{kHz}$
RR	纹波抑制比	59	75		dB	$f=120\text{Hz}$, $9\text{V} \leq V_i \leq 19\text{V}$
V_D	下降电压		2		V	$I_o=1\text{A}$, $T_J=25^{\circ}\text{C}$
R_o	输出阻抗		19		m Ω	$f=1\text{kHz}$
I_{sc}	短路电流		250		mA	$V_i=35\text{V}$, $T_A=25^{\circ}\text{C}$
I_{PK}	峰值电流		2.2		A	$T_J=25^{\circ}\text{C}$

型号: L7808CV

(参见测试电路, 除非另有说明, $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $I_o = 500\text{mA}$, $V_i = 14\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
V_o	输出电压	7.7	8.0	8.3	V	$T_J = 25^{\circ}\text{C}$
		7.6	8.0	8.4		$5.0\text{mA} \leq I_o \leq 1.2\text{A}$, $P_o \leq 15\text{W}$, $10.5\text{V} \leq V_i \leq 23\text{V}$
ΔV_o	电压调整率*		5	160	mV	$T_J = 25^{\circ}\text{C}$, $10.5\text{V} \leq V_i \leq 25\text{V}$
			2	80		$T_J = 25^{\circ}\text{C}$, $11.5\text{V} \leq V_i \leq 17\text{V}$
ΔV_o	负载调整率*		10	160	mV	$T_J = 25^{\circ}\text{C}$, $5.0\text{mA} \leq I_o \leq 1.5\text{A}$
			5	80		$T_J = 25^{\circ}\text{C}$, $250\text{mA} \leq I_o \leq 750\text{mA}$
I_q	静态电流		5	8	mA	$T_J = 25^{\circ}\text{C}$
ΔI_q	静态电流变化率		0.05	0.5	mA	$5\text{mA} \leq I_o \leq 1.2\text{A}$
			0.5	1.0		$10.5\text{V} \leq V_i \leq 25\text{V}$
$\Delta V_o / \Delta T$	输出电压温度系数		-0.8		mV/ $^{\circ}\text{C}$	$I_o = 5\text{mA}$
V_n	输出噪声电压		52		μV	$T_A = 25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{kHz}$
RR	纹波抑制比	56	73		dB	$f = 120\text{Hz}$, $11.5\text{V} \leq V_i \leq 21.5\text{V}$
V_d	下降电压		2		V	$I_o = 1\text{A}$, $T_J = 25^{\circ}\text{C}$
R_o	输出阻抗		17		m Ω	$f = 1\text{kHz}$
I_{sc}	短路电流		230		mA	$V_i = 35\text{V}$, $T_A = 25^{\circ}\text{C}$
I_{pk}	峰值电流		2.2		A	$T_J = 25^{\circ}\text{C}$

型号: L7809CV

(参见测试电路, 除非另有说明, $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $I_o = 500\text{mA}$, $V_i = 15\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
V_o	输出电压	8.65	9.0	9.35	V	$T_J = 25^{\circ}\text{C}$
		8.6	9.0	9.4		$5.0\text{mA} \leq I_o \leq 1.2\text{A}$, $P_o \leq 15\text{W}$, $11.5\text{V} \leq V_i \leq 24\text{V}$
ΔV_o	电压调整率*		6	90	mV	$T_J = 25^{\circ}\text{C}$, $11.5\text{V} \leq V_i \leq 24\text{V}$
			2	45		$T_J = 25^{\circ}\text{C}$, $12.5\text{V} \leq V_i \leq 19\text{V}$
ΔV_o	负载调整率*		12	100	mV	$T_J = 25^{\circ}\text{C}$, $5.0\text{mA} \leq I_o \leq 1.5\text{A}$
			5	50		$T_J = 25^{\circ}\text{C}$, $250\text{mA} \leq I_o \leq 750\text{mA}$
I_q	静态电流		5	8	mA	$T_J = 25^{\circ}\text{C}$
ΔI_q	静态电流变化率			0.5	mA	$5\text{mA} \leq I_o \leq 1.2\text{A}$
				0.8		$12\text{V} \leq V_i \leq 25\text{V}$
$\Delta V_o / \Delta T$	输出电压温度系数		-1		mV/ $^{\circ}\text{C}$	$I_o = 5\text{mA}$
V_n	输出噪声电压		58		μV	$T_A = 25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{kHz}$
RR	纹波抑制比	56	71		dB	$f = 120\text{Hz}$, $13\text{V} \leq V_i \leq 23\text{V}$
V_d	下降电压		2		V	$I_o = 1\text{A}$, $T_J = 25^{\circ}\text{C}$
R_o	输出阻抗		17		m Ω	$f = 1\text{kHz}$
I_{sc}	短路电流		250		mA	$V_i = 35\text{V}$, $T_A = 25^{\circ}\text{C}$
I_{pk}	峰值电流		2.2		A	$T_J = 25^{\circ}\text{C}$

型号: L7810CV

(参见测试电路, 除非另有说明, $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $I_o = 500\text{mA}$, $V_i = 10\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
V_o	输出电压	9.6	10	10.4	V	$T_J = 25^{\circ}\text{C}$
		9.5	10	10.5		$5.0\text{mA} \leq I_o \leq 1.4\text{A}$, $P_o \leq 15\text{W}$, $12.5\text{V} \leq V_i \leq 25\text{V}$
ΔV_o	电压调整率*		10	200	mV	$T_J = 25^{\circ}\text{C}$, $12.5\text{V} \leq V_i \leq 25\text{V}$
			3	100		$T_J = 25^{\circ}\text{C}$, $13\text{V} \leq V_i \leq 20\text{V}$
ΔV_o	负载调整率*		12	200	mV	$T_J = 25^{\circ}\text{C}$, $5.0\text{mA} \leq I_o \leq 1.4\text{A}$
			4	100		$T_J = 25^{\circ}\text{C}$, $250\text{mA} \leq I_o \leq 750\text{mA}$
I_o	静态电流		5.1	8	mA	$T_J = 25^{\circ}\text{C}$
ΔI_o	静态电流变化率			0.5	mA	$5\text{mA} \leq I_o \leq 1.4\text{A}$
				1.0		$12.5\text{V} \leq V_i \leq 29\text{V}$
$\Delta V_o / \Delta T$	输出电压温度系数		-1		mV/ $^{\circ}\text{C}$	$I_o = 5\text{mA}$
V_N	输出噪声电压		58		μV	$T_A = 25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{kHz}$
RR	纹波抑制比	56	71		dB	$f = 120\text{Hz}$, $14\text{V} \leq V_i \leq 24\text{V}$
V_D	下降电压		2		V	$I_o = 1\text{A}$, $T_J = 25^{\circ}\text{C}$
R_o	输出阻抗		17		m Ω	$f = 1\text{kHz}$
I_{SC}	短路电流		250		mA	$V_i = 35\text{V}$, $T_A = 25^{\circ}\text{C}$
I_{PK}	峰值电流		2.2		A	$T_J = 25^{\circ}\text{C}$

型号: L7812CV

(参见测试电路, 除非另有说明, $0^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$, $I_o = 500\text{mA}$, $V_i = 19\text{V}$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
V_o	输出电压	11.5	12	12.5	V	$T_J = 25^{\circ}\text{C}$
		11.4	12	12.6		$5.0\text{mA} \leq I_o \leq 1.2\text{A}$, $P_o \leq 15\text{W}$, $14.5\text{V} \leq V_i \leq 27\text{V}$
ΔV_o	电压调整率*		10	240	mV	$T_J = 25^{\circ}\text{C}$, $14.5\text{V} \leq V_i \leq 30\text{V}$
			3	120		$T_J = 25^{\circ}\text{C}$, $16\text{V} \leq V_i \leq 22\text{V}$
ΔV_o	负载调整率*		11	240	mV	$T_J = 25^{\circ}\text{C}$, $5.0\text{mA} \leq I_o \leq 1.5\text{A}$
			5	120		$T_J = 25^{\circ}\text{C}$, $250\text{mA} \leq I_o \leq 750\text{mA}$
I_o	静态电流		5.1	8	mA	$T_J = 25^{\circ}\text{C}$
ΔI_o	静态电流变化率		0.1	0.5	mA	$5\text{mA} \leq I_o \leq 1.2\text{A}$
			0.5	1.0		$14.5\text{V} \leq V_i \leq 30\text{V}$
$\Delta V_o / \Delta T$	输出电压温度系数		-1		mV/ $^{\circ}\text{C}$	$I_o = 5\text{mA}$
V_n	输出噪声电压		76		μV	$T_A = 25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{kHz}$
RR	纹波抑制比	55	71		dB	$f = 120\text{Hz}$, $15\text{V} \leq V_i \leq 25\text{V}$
V_d	下降电压		2		V	$I_o = 1\text{A}$, $T_J = 25^{\circ}\text{C}$
R_o	输出阻抗		18		m Ω	$f = 1\text{kHz}$
I_{sc}	短路电流		230		mA	$V_i = 35\text{V}$, $T_A = 25^{\circ}\text{C}$
I_{pk}	峰值电流		2.2		A	$T_J = 25^{\circ}\text{C}$

型号: L7815CV

(参见测试电路, 除非另有说明, $0^{\circ}\text{C} \leq T_j \leq 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_i=23\text{V}$, $C_1=2.2\mu\text{F}$, $C_o=0.1\mu\text{F}$)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
V_o	输出电压	14.4	15	15.6	V	$T_j=25^{\circ}\text{C}$
		14.25	15	15.75		$5.0\text{mA} \leq I_o \leq 1.2\text{A}$, $P_o \leq 15\text{W}$, $17.5\text{V} \leq V_i \leq 30\text{V}$
ΔV_o	电压调整率*		11	300	mV	$T_j=25^{\circ}\text{C}$, $17.5\text{V} \leq V_i \leq 30\text{V}$
			3	150		$T_j=25^{\circ}\text{C}$, $20\text{V} \leq V_i \leq 26\text{V}$
ΔV_o	负载调整率*		12	300	mV	$T_j=25^{\circ}\text{C}$, $5.0\text{mA} \leq I_o \leq 1.5\text{A}$
			4	150		$T_j=25^{\circ}\text{C}$, $250\text{mA} \leq I_o \leq 750\text{mA}$
I_q	静态电流		5.2	8	mA	$T_j=25^{\circ}\text{C}$
ΔI_q	静态电流变化率			0.5	mA	$5\text{mA} \leq I_o \leq 1.2\text{A}$
				1.0		$17.5\text{V} \leq V_i \leq 30\text{V}$
$\Delta V_o / \Delta T$	输出电压温度系数		-1		mV/ $^{\circ}\text{C}$	$I_o=5\text{mA}$
V_N	输出噪声电压		90		μV	$T_A=25^{\circ}\text{C}$, $10\text{Hz} \leq f \leq 100\text{kHz}$
RR	纹波抑制比	54	70		dB	$f=120\text{Hz}$, $18.5\text{V} \leq V_i \leq 28.5\text{V}$
V_D	下降电压		2		V	$I_o=1\text{A}$, $T_j=25^{\circ}\text{C}$
R_o	输出阻抗		19		m Ω	$f=1\text{kHz}$
I_{SC}	短路电流		250		mA	$V_i=35\text{V}$, $T_A=25^{\circ}\text{C}$
I_{PK}	峰值电流		2.2		A	$T_j=25^{\circ}\text{C}$

测试电路

图1、DC 参数测试

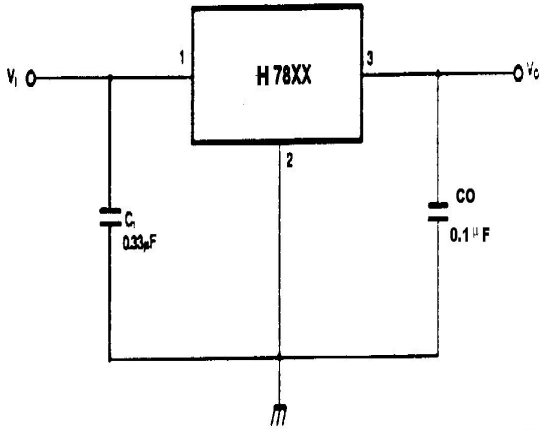


图2、负载调整率测试


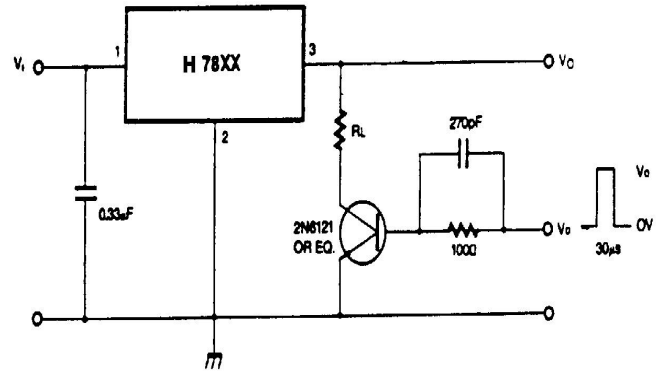


图3、纹波抑制比测试

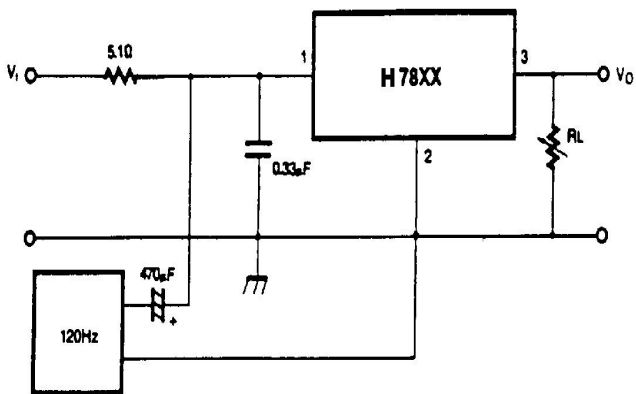

应用电路

图4、固定输出稳压器



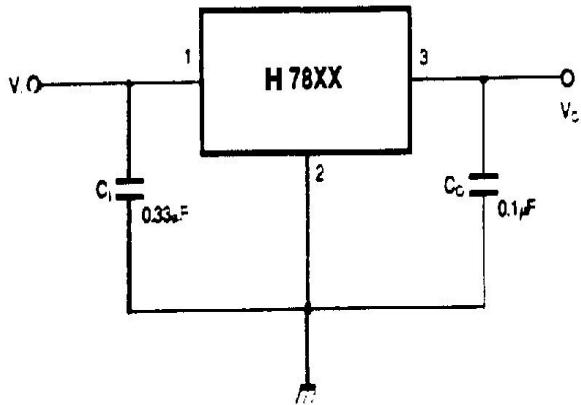


图5、恒流源

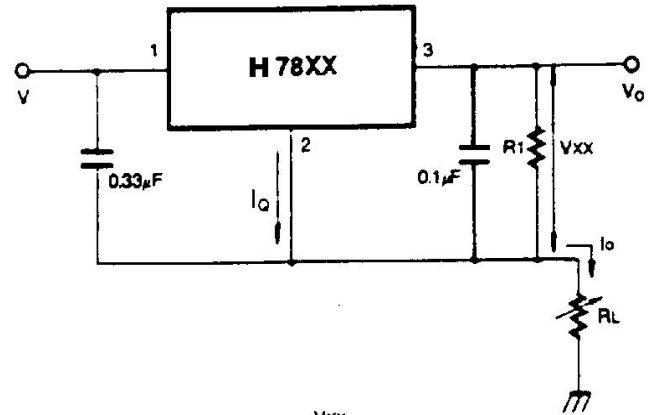

$$I_o = \frac{V_{XX}}{R} + I_Q$$

图6、提高输出电压电路

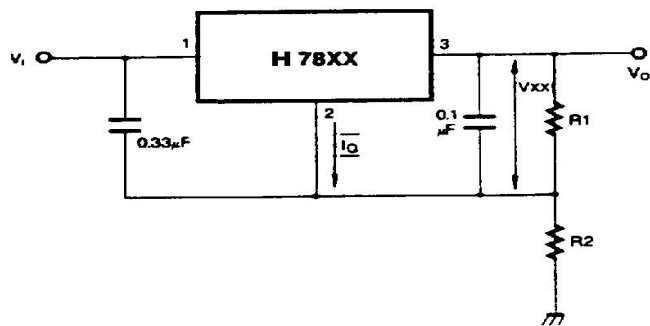

$$I_{R1} \geq 5 I_Q$$

$$V_O = V_{XX} (1 + R_2/R_1) + I_Q R_2$$

- 注：
- 1) 输出电压对应于“XX”值。输入电压，即使是纹波电压中的低值点，都必须高于所需输出电压 2V 以上。
 - 2) 当稳压器远离电源滤波器时，要求用 C1。
 - 3) C0 可改善稳定性和瞬态响应。

应用电路(续)

图 7、可调整输出稳压器(7~30V)

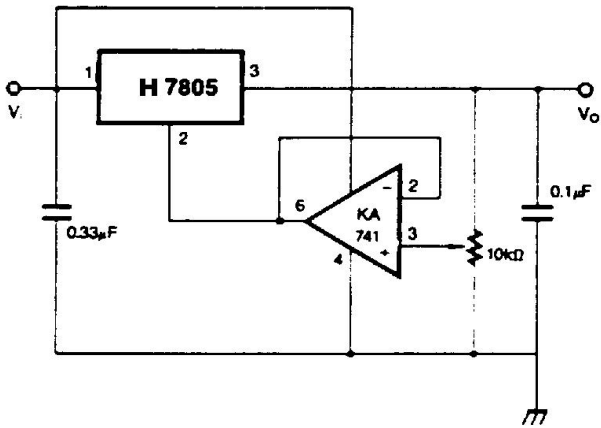


图 8、大电流稳压器

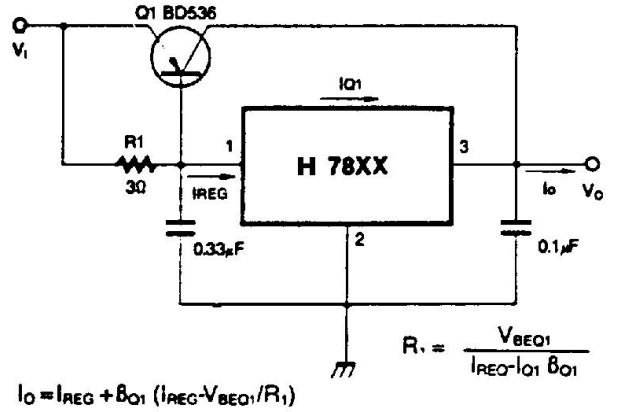


图 9、带短路保护的大电流输出

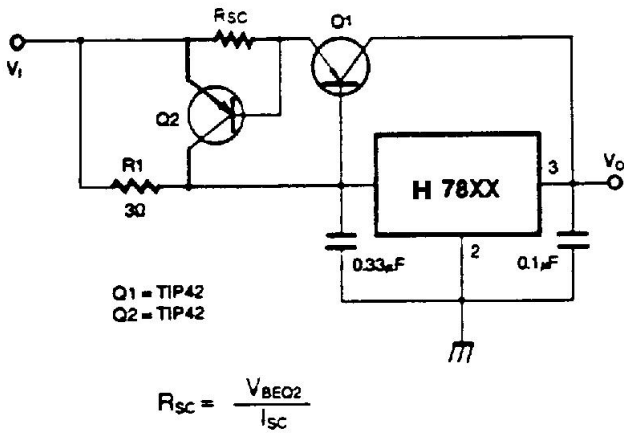


图 10、跟踪稳压器

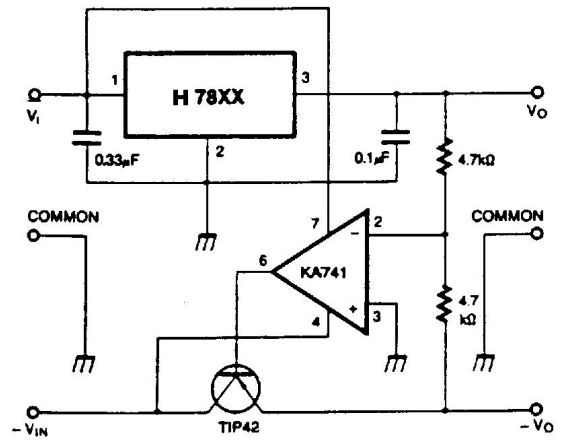


图 11、分离电源(±15V-1A)

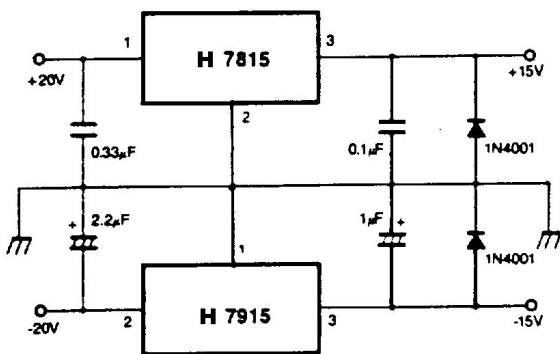


图 12、负输出电压电路



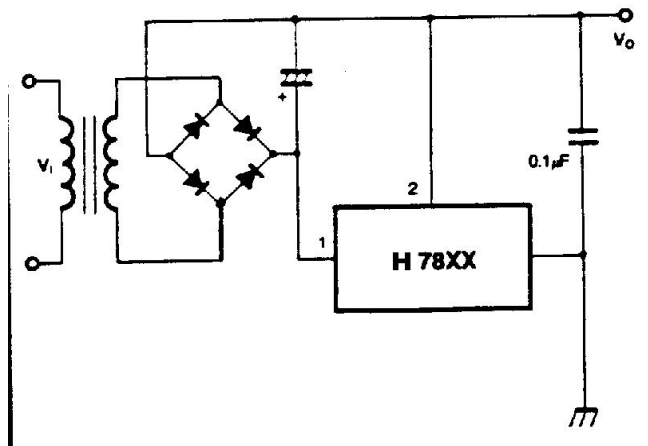


图13、开关稳压器

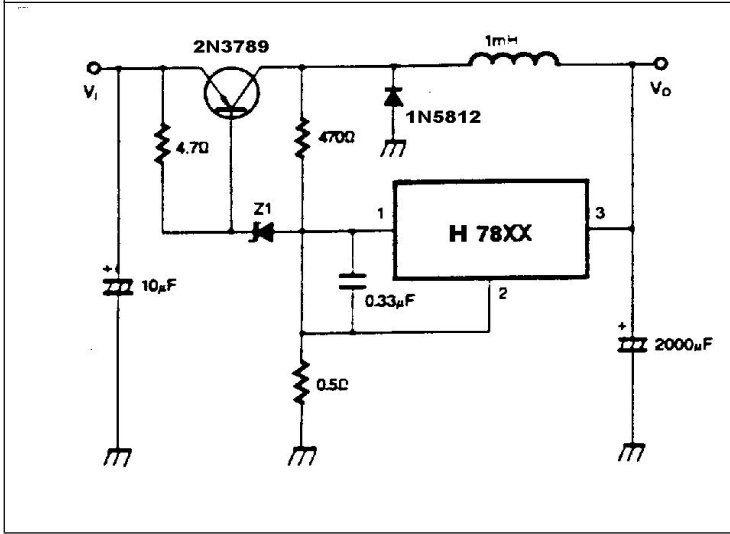


■ 典型特性曲线


静态电流

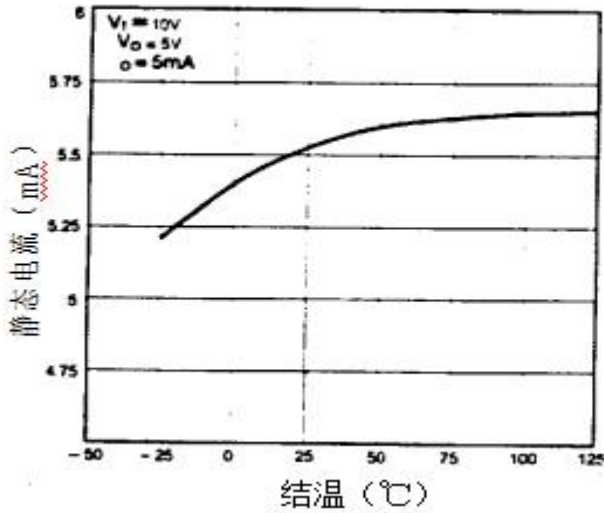


峰值输出电流

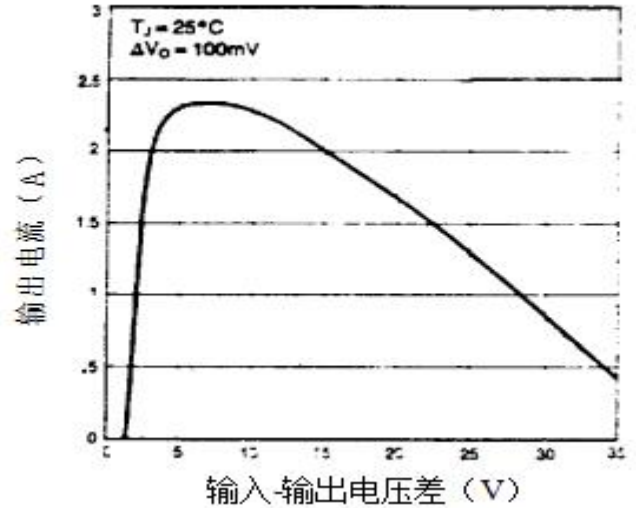


输出电压

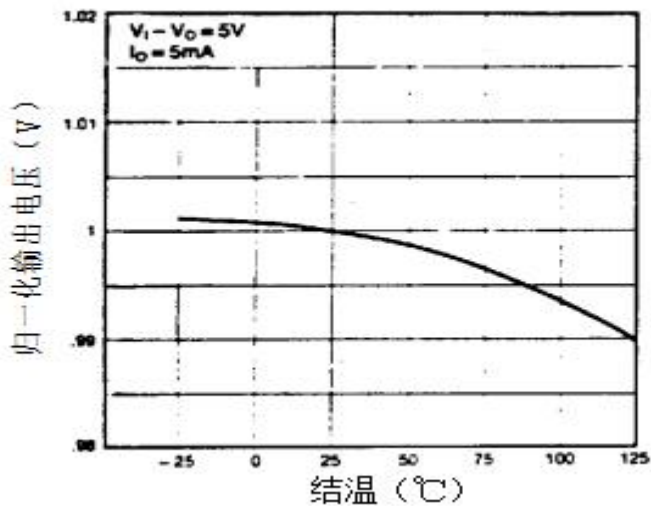

静态电流

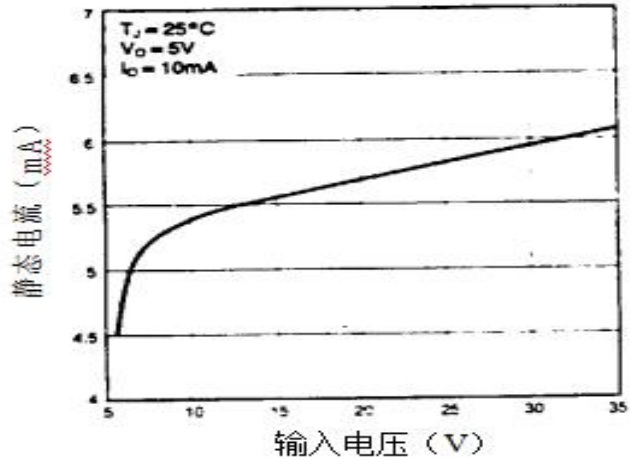

Package Description

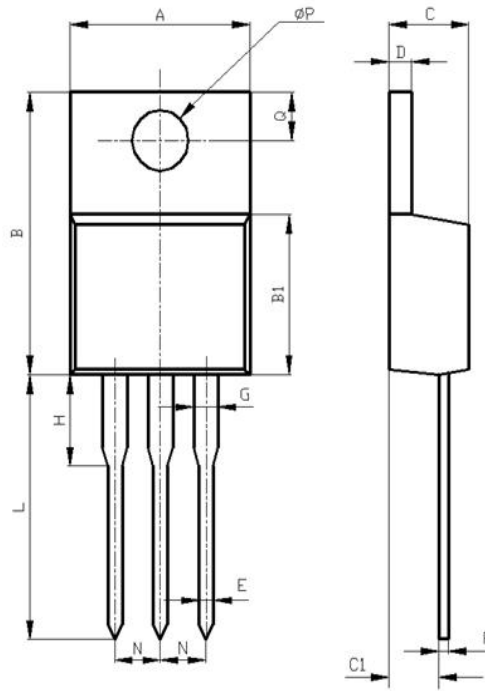

Items	Values(mm)	
	MIN	MAX
A	9.60	10.6
B	15.0	16.0
B1	8.90	9.50
C	4.30	4.80
C1	2.30	3.10
D	1.20	1.40
E	0.70	0.90
F	0.30	0.60
G	1.17	1.37
H	2.70	3.80
L	12.6	14.8
N	2.34	2.74
Q	2.40	3.00
ϕP	3.50	3.90

TO-220 Package

NOTE:

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shenzhen Minos reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

深圳市迈诺斯科技有限公司（总部）

地址：深圳市福田区华富街道田面社区深南中路4026号田面城市大厦16D

邮编：518025

电话：0755-83273777