


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

1. Specifications
- 1-1. INSERT FORCE: 35N MAX.
- 1-2. WITHDRAW FORCE: 10N MIN. INITIAL 8-20N AFTER
- 1-3. Current rating: 1.0A
- 1-4. Voltage Rating: 30V
- 1-5. Life Test: 10000 CYCLES MIN.
- 1-6. Dielectric withstanding: voltage 100V AC MIN.
- 1-7. Contact resistance: 30mΩ
- MAX. INITIAL: 40mΩ MAX AFTER
- 1-8. Insulation resistance: 100MΩ MIN
- 1-9. Temperature range: -30°TO +80°

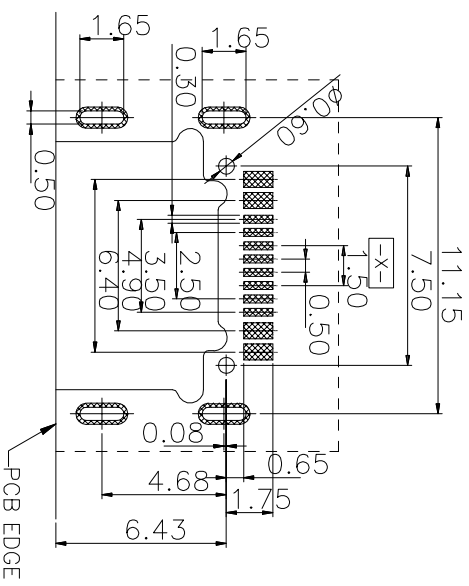

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.																								
	A		NEW																											
<table border="1"> <thead> <tr> <th>APPROVALS</th> <th>DATE</th> <th>TITLE:</th> </tr> </thead> <tbody> <tr> <td>DRAWN D.J.LV</td> <td>2017/12/26</td> <td>ELECTRONICS CO.,LTD</td> </tr> <tr> <td>CHECKED</td> <td></td> <td>TYPE C16pin沉板1.1MM</td> </tr> <tr> <td>APPROVALS</td> <td></td> <td>TYPE-C-31-M-14</td> </tr> <tr> <td>TOLERANCES ARE</td> <td>30~0.1mm ±0.30</td> <td>ANGLE</td> </tr> <tr> <td></td> <td>10~30 ±0.20</td> <td>UNIT: mm</td> </tr> <tr> <td></td> <td>5~10 ±0.15</td> <td>SCALE: 1:1</td> </tr> <tr> <td></td> <td>~5 ±0.10</td> <td>PROJ: 1 OF 1</td> </tr> </tbody> </table>							APPROVALS	DATE	TITLE:	DRAWN D.J.LV	2017/12/26	ELECTRONICS CO.,LTD	CHECKED		TYPE C16pin沉板1.1MM	APPROVALS		TYPE-C-31-M-14	TOLERANCES ARE	30~0.1mm ±0.30	ANGLE		10~30 ±0.20	UNIT: mm		5~10 ±0.15	SCALE: 1:1		~5 ±0.10	PROJ: 1 OF 1
APPROVALS	DATE	TITLE:																												
DRAWN D.J.LV	2017/12/26	ELECTRONICS CO.,LTD																												
CHECKED		TYPE C16pin沉板1.1MM																												
APPROVALS		TYPE-C-31-M-14																												
TOLERANCES ARE	30~0.1mm ±0.30	ANGLE																												
	10~30 ±0.20	UNIT: mm																												
	5~10 ±0.15	SCALE: 1:1																												
	~5 ±0.10	PROJ: 1 OF 1																												