

1. Description

XC6206 series is a CMOS step - down voltage regulator with high ripple rejection, low power consumption, low dropout, overcurrent and short - circuit protection. These devices have a very low static bias current (6.0μA Typ.), which can provide an output current of 250mA even if the difference between the input and output voltages is very small, and still maintain a good regulation rate.

3. Features


- High precision output voltage:
Accuracy A: ±1%, Accuracy B: ±2.5%
- Output voltage: 1.5V~5.0V (step size 0.1V)
- Very low static bias current
(Typ.=6.0 μ A)
- Low temperature adjustment coefficient

2. Product Usage


- Battery power supply system
- Cordless telephone equipment
- Wireless control system
- Portable/palm computer
- Portable consumer equipment
- Portable instrument
- Automobile electronic equipment
- Voltage reference source

- The highest input voltage can reach 8V
- With strong load capacity: when Vin=4.3V and Vout=3.3V, Iout=250mA.
- It can be used as regulator and reference voltage
- Good input stability: Typ. 0.03%/V
- Package form: SOT89 -3, SOT23 -3

4. Pinning information



SOT-23



SOT-89




5. Model selection

XC6206P ① ② ③ ④ ⑤

Representative number	Describe	Symbol	Describe
① ②	Output voltage	12 ~ 50	e.g. output 3.0V → ① =3, ② =0
③	precision	2	±2.5%
		1	±1%
④	package	M	SOT-23
		P	SOT-89
⑤	Belt loading	R	embossed belt, standard inflow

6. Principle block diagram

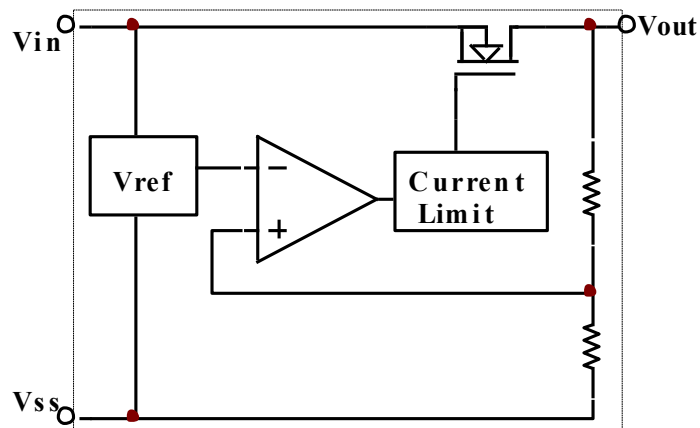



7.Limit parameter

Project	Symbol	parameter		Limit value	Company
Voltage	V_{IN}	Input voltage		9	V
	V_{OUT}	Output voltage		$V_{SS}-0.3 \sim V_{out} 0.3$	V
electric current	I_{OUT}	output current		500	mA
power consumption	PD	SOT23	Maximum allowable	300	mW
		SOT89 - 3	power consumption	500	mW
temperature	T_w	Working temperature		-25 to 85	°C
	T_c	Storage temperature		-40 to 125	°C
	T_h	welding temperature		260	°C,10s



8. Electrical characteristics

($C_{in}=C_{out}=1\mu F, T_A=25^\circ C$ unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Units	
Output voltage	$V_{OUT}(E)$	$I_{OUT}=1mA, V_{IN}=V_{OUT}(T)+1V$	$V_{OUT}(T) \times 0.975$	$V_{OUT}(T)$	$V_{OUT}(T) \times 1.025$	V	
Output Current	$I_{OUT}(max)$	$V_{IN}=V_{OUT}(T)+1V$	100			mA	
Drop pressure difference	V_{drop}	$I_{OUT}=50mA$	$1.5V \leq V_{OUT}(T) \leq 2.5V$		200	280	mV
			$2.6V \leq V_{OUT}(T) \leq 3.3V$		160	240	mV
			$3.4V \leq V_{OUT}(T) \leq 5.5V$		120	200	mV
quiescent current	I_{SS}	$V_{IN}=V_{OUT}(T)+1V$		6		μA	
Load stability	ΔV_{OUT}	$V_{IN}=V_{OUT}(T)+1V, 1mA \leq I_{OUT} \leq 80mA$		20		mV	
Input stability	$\Delta V_{OUT}/(\Delta V_{IN} \times V_{OUT})$	$I_{OUT}=1mA, V_{OUT}(T)+0.5V \leq V_{IN} \leq 5.5V$		0.1	0.2	%/V	
Output voltage temperature coefficient	$\Delta V_{OUT}/(\Delta T_A \times V_{OUT})$	$V_{IN}=V_{OUT}(T)+1V, I_{OUT}=10mA$ $-40^\circ C \leq T_A \leq 85^\circ C$		± 100		ppm/ $^\circ C$	
input voltage	V_{IN}		1.8		8	V	
Ripple suppression ratio	PSRR	$V_{IN}=[V_{OUT}(T)+1]V + 1V_{p-pAC}$ $I_{OUT}=10mA, f=1kHz$		40		dB	
Short circuit current	I_{short}	$V_{IN}=V_{OUT}(T)+1.5V, V_{OUT}=V_{SS}$		30		mA	
Overcurrent protection current	I_{limt}	$V_{IN}=V_{OUT}(T)+1.5V$		380		mA	

Note:

- $V_{OUT}(T)$: the specified output voltage.
- $V_{OUT}(E)$: effective output voltage (that is, the output voltage when I_{OUT} keeps a certain value and $V_{IN}=(V_{OUT}(T)+1.0V)$).
- $I_{OUT}(max)$: $V_{IN}=V_{OUT}(T)+1V$, slowly increase the output current, and the current value when the output voltage is $\leq V_{OUT}(E) \times 95\%$.
- $V_{drop}=V_{IN1}-V_{OUT}(e)$ s: V_{IN1} = the input voltage when the output voltage drops to 98% of $V_{OUT}(E)$. $V_{OUT}(E)s=V_{OUT}(E) \times 98\%$
 $V_{OUT}(E)1$ = the output voltage value when $V_{IN}=V_{OUT}(t)+1V$ and I_{OUT} = a certain value.



9. Test Circuit

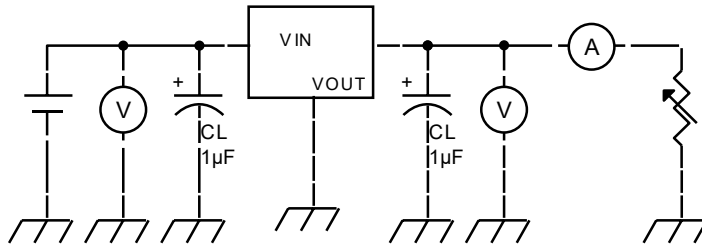


Figure 1


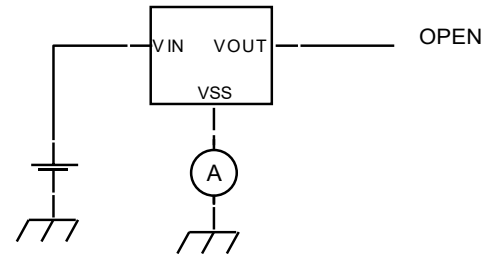



Figure 2




10. Applied Circuit

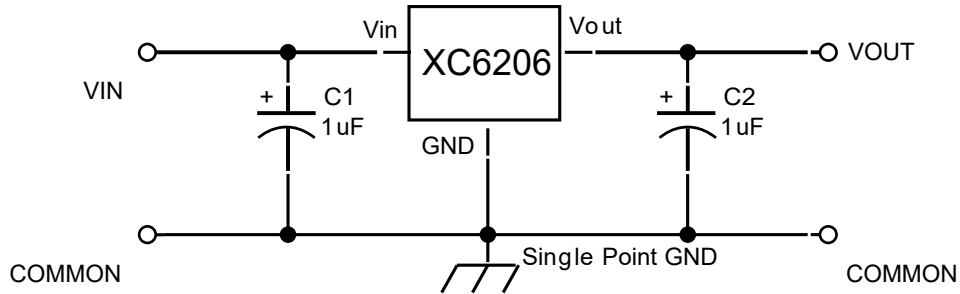

1. Basic circuit

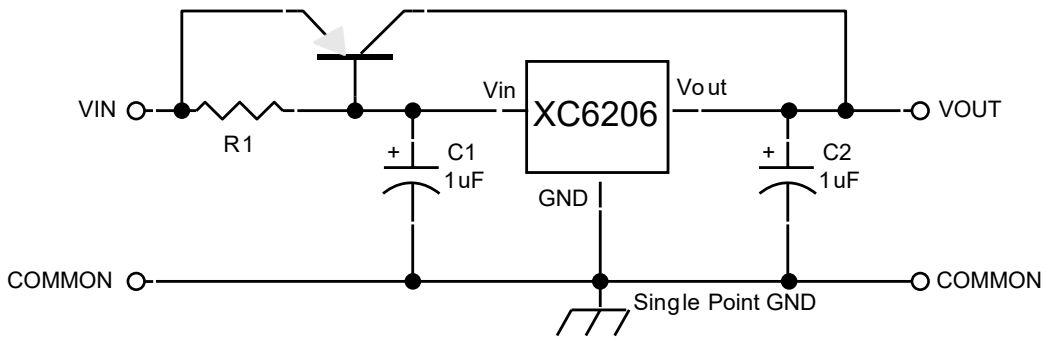


2. Positive voltage regulator with large output current

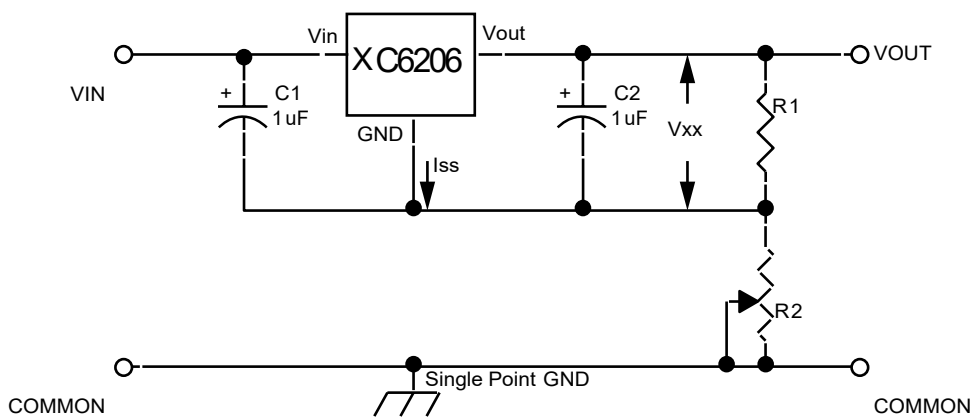


$$V_{OUT} = V_{XX}(1 + R2/R1) + I_{SS}R2$$

3. Circuit for increasing output voltage (1)

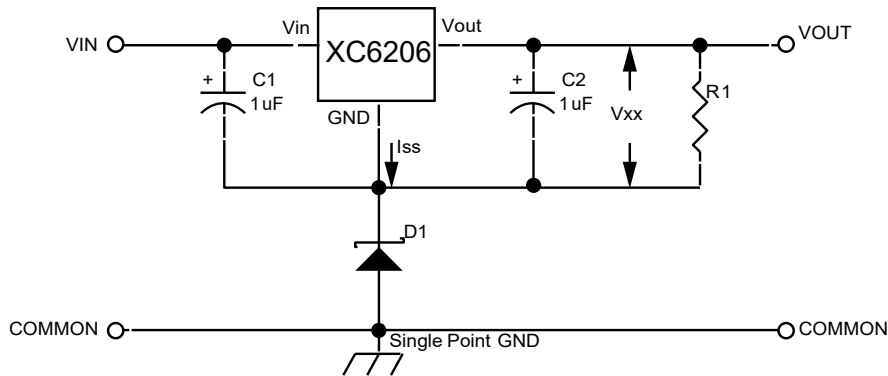


$$V_{OUT} = V_{XX} + V_{D1}$$

4. Circuit for increasing output voltage (2)

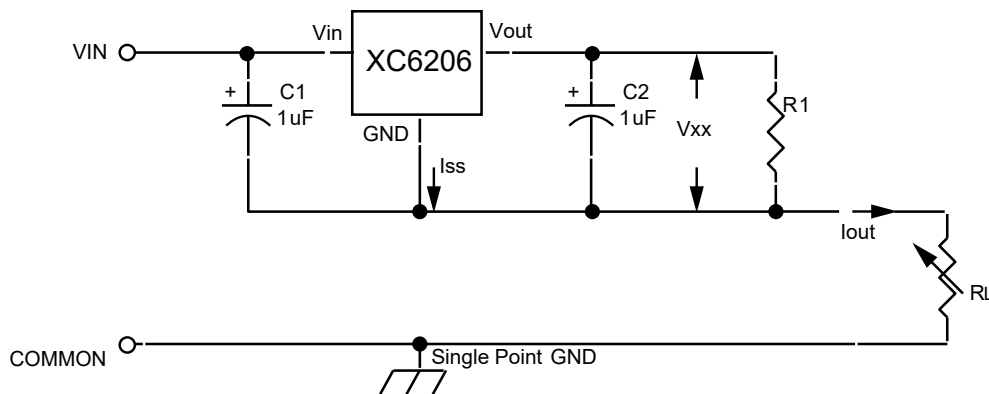

$$I_{OUT} = V_{XX} / R_A + I_{SS}$$

5. Constant current regulator

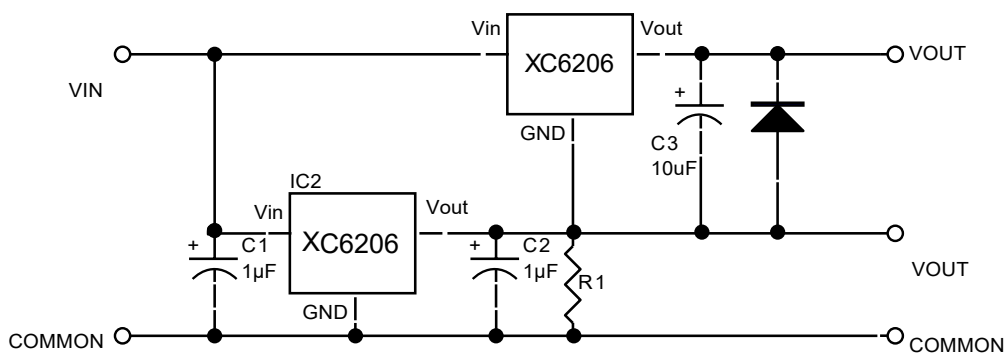

6. Double output




11.1 Typical characteristic

<p>Figure 1: Output voltage-output current (when the load current increases)</p>	<p>Figure 2: Output voltage and input voltage</p>
<p>Figure 3: Dropout voltage and output current</p>	<p>Figure 4: Dropout voltage and output voltage</p>
<p>Figure 5: Output voltage and temperature</p>	<p>Figure 6: Ripple suppression</p>




11.2 Typical characteristic

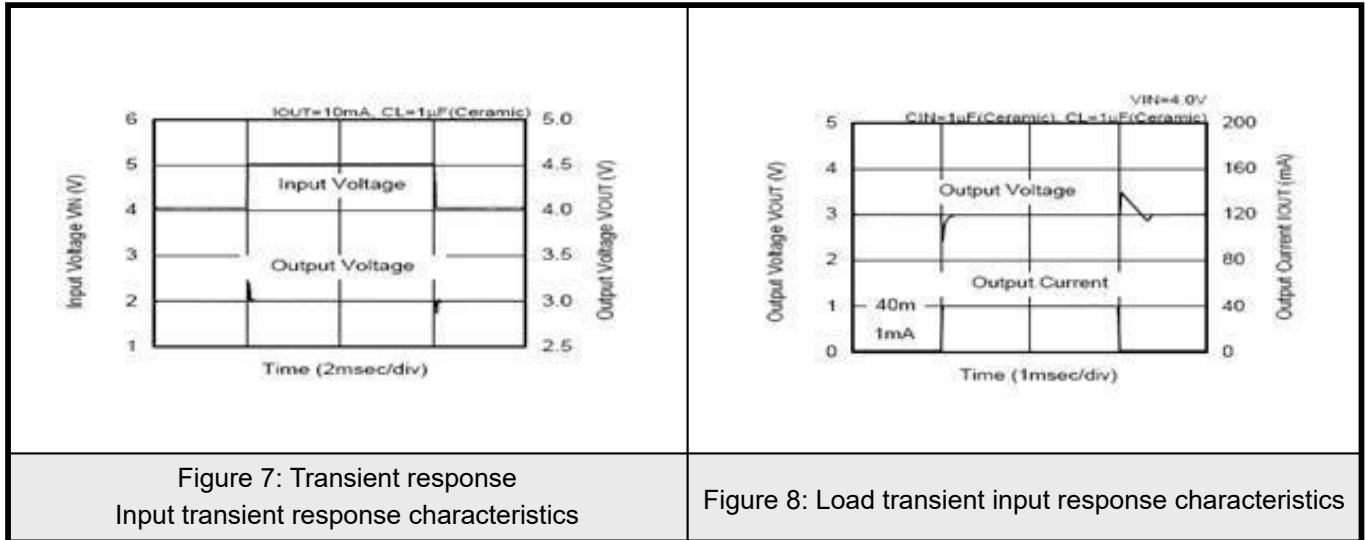



12.1 SOT-89 Package Outline Dimensions

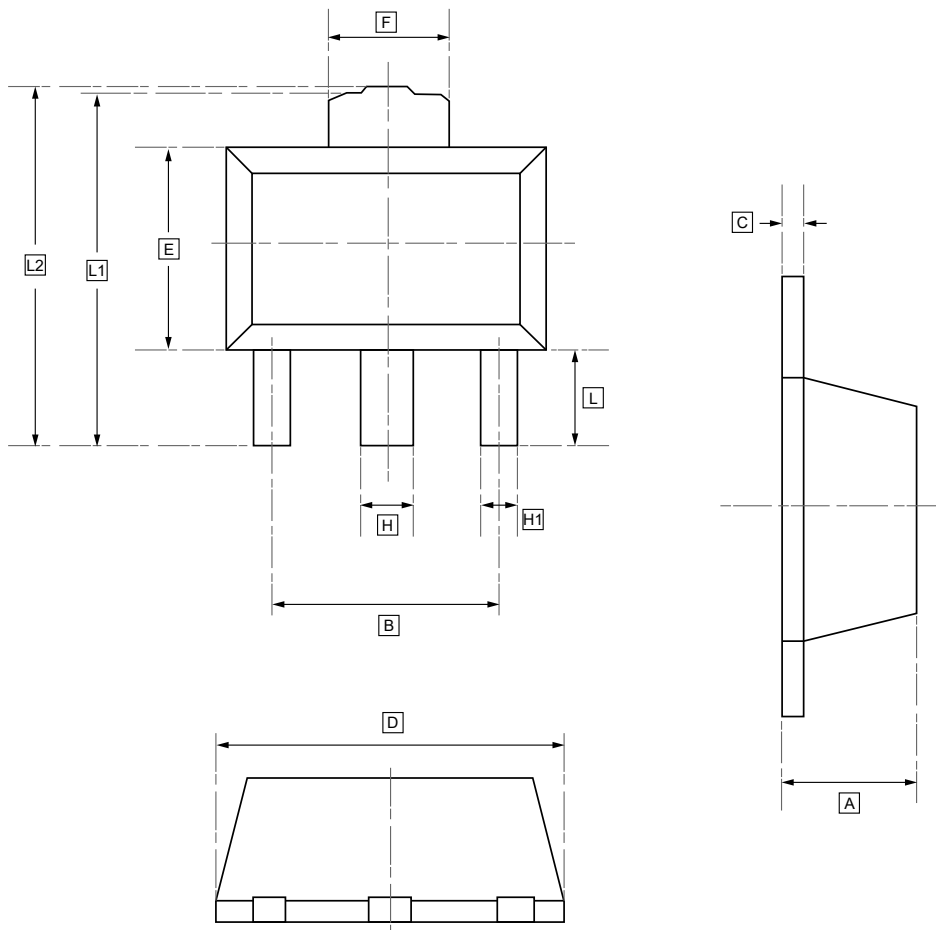


DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	F	H	H1	L	L1	L2
Min	1.450	2.950	0.330	4.450	2.450	1.650	0.450	0.370	0.900	4.100	4.100
Max	1.550	3.050	0.430	4.550	2.550	1.750	0.580	0.480	1.000	4.300	4.350



12.2 SOT-23 Package Outline Dimensions

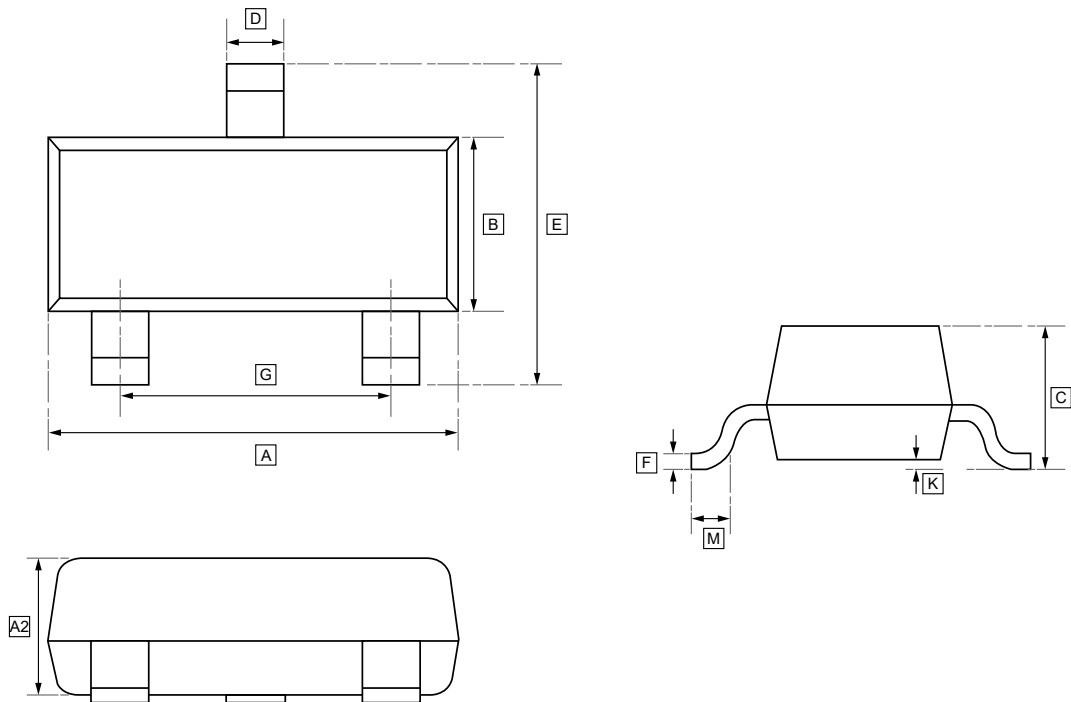


DIMENSIONS (mm are the original dimensions)

Symbol	A	B	C	D	E	G	K	M	A2	F
Min	2.85	1.20	0.90	0.40	2.25	1.80	0.00	0.30	0.95	0.095
Max	3.04	1.40	1.10	0.50	2.55	2.00	0.10	-	1.05	0.115



13. Ordering information

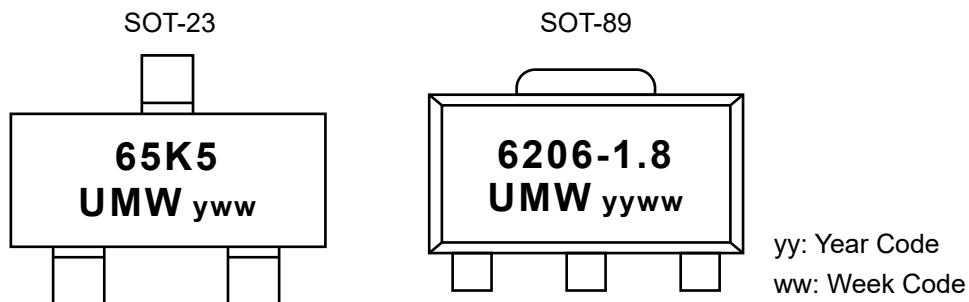

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW XC6206P182MR	65K5	SOT-23	3000	Tape and reel
UMW XC6206P252MR	65T5	SOT-23	3000	Tape and reel
UMW XC6206P282MR	65X5	SOT-23	3000	Tape and reel
UMW XC6206P302MR	65Z5	SOT-23	3000	Tape and reel
UMW XC6206P332MR	662K	SOT-23	3000	Tape and reel
UMW XC6206P362MR	665K	SOT-23	3000	Tape and reel
UMW XC6206P182PR	6206-1.8	SOT-89	1000	Tape and reel
UMW XC6206P252PR	6206-2.5	SOT-89	1000	Tape and reel
UMWXC6206P282PR	6206-2.8	SOT-89	1000	Tape and reel
UMW XC6206P302PR	6206-3.0	SOT-89	1000	Tape and reel
UMW XC6206P332PR	6206-3.3	SOT-89	1000	Tape and reel
UMW XC6206P362PR	6206-3.6	SOT-89	1000	Tape and reel



14.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.