ROHS

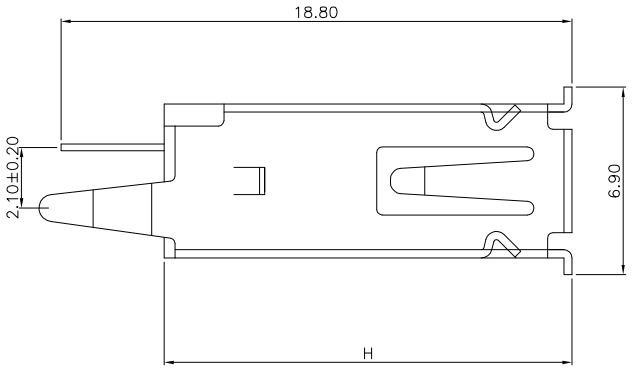

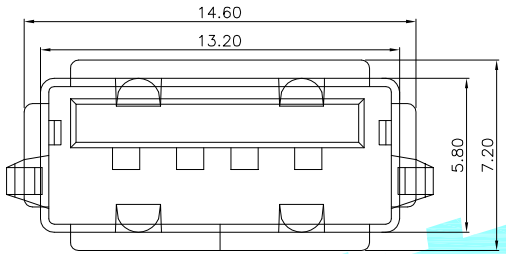

特性:Specifications;
电器:Electyical:
接触阻抗:Contact Resistance
30 millionms MAX
耐电压:Dielectyic Withstanding Voltage:
500v AC AT Sea Level
绝缘阻抗:Insulation Resistance:
1000 MEGA ohms MLN
机构:Machanical:
接合为:Mating Force;
4.0 KG MAX 最大4Kg
拔出力:Unmating Force;
0.7KG MIN.最少0.7KG

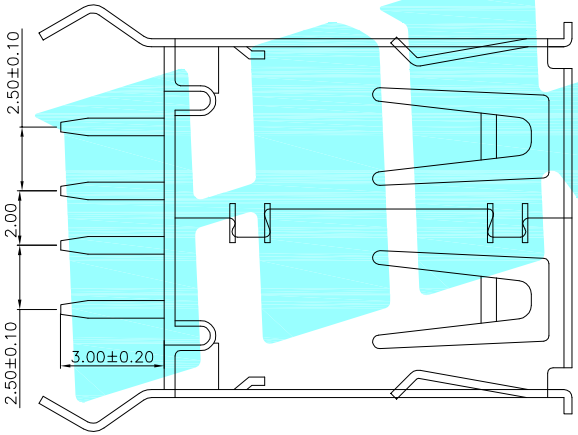

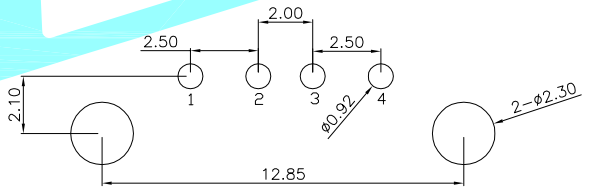

Recommended PCB Layout

PART NO	H
U-A-24DD-Y-2	13.00
U-A-24DD-Y-3	13.70
U-A-24DD-Y-4	15.00

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
③	Base	——	1	NYLON	White
②	Terminal	——	4	Phosphor Bronze	Ag Plated
①	Housing	——	1	SPCC/Phosphor Bronze	Ni Plated

APPROVALS		DATE
DRAWN	JIANKUN.LU	2015.03.18
CHECKED		
APPROVALS		

HRO韩荣® ELECTRONICS CO.,LTD

TITLE: USB CONNECTOR

PART NO.

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.25; 5~10 ±0.20; ~ 5 ±0.15; ANGLE ±2°

UNIT: mm | SCALE: 1:1 | PROJ:

DRAWING NO. ——— | SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——