

智能功率模块：600V /5A 三相全桥驱动 NSMB05S60B1

1. 特点

- 内置 6 个 600V/5A 的快恢复功率 IGBT (Typ. $V_{CEsat}=1.45V @25^{\circ}C$)
- 内置高压栅极驱动电路 (HVIC)
- 内置欠压保护
- 内置自举二极管
- 内置温度检测功能
- 内置栅驱动电路的电压范围从 10V 到 20V
- 3 个独立的负电流端用于需要电流检测的应用
- 兼容 3.3V 和 5V 的 MCU 接口，高电平有效
- 优化并采用了低电磁干扰设计
- 绝缘等级 1500Vrms/min

2. 典型应用

- 高效能风扇
- 水泵
- 室内/户外空调
- 冰箱压缩机
- 排风扇
- 空气净化器

3. 芯片概述

3.1 特点

NSMB05S60B1 是高度集成、高可靠性的三相无刷直流电机驱动电路，主要应用于马达驱动，比如高效能风扇和水泵。该模块内置了 6 个快恢复功率 IGBT 管和 3 个半桥高压栅极驱动电路。

NSMB05S60B1 内部集成了欠压保护功能，提供了优异的保护和失效保护操作。由于每一相都有一个独立的负直流流端，其电流可以分别单独检测。

NSMB05S60B1 采用了高绝缘、易导热和低电磁干扰的


设计，提供了非常紧凑的封装体，使用非常方便，尤其适合内置于电机的应用和要求紧凑安装场合。

3.2 芯片信息



Part Number	Package	Body size
NSMB05S60B1	SOP23	29mm x 12mm

Functional Block Diagram

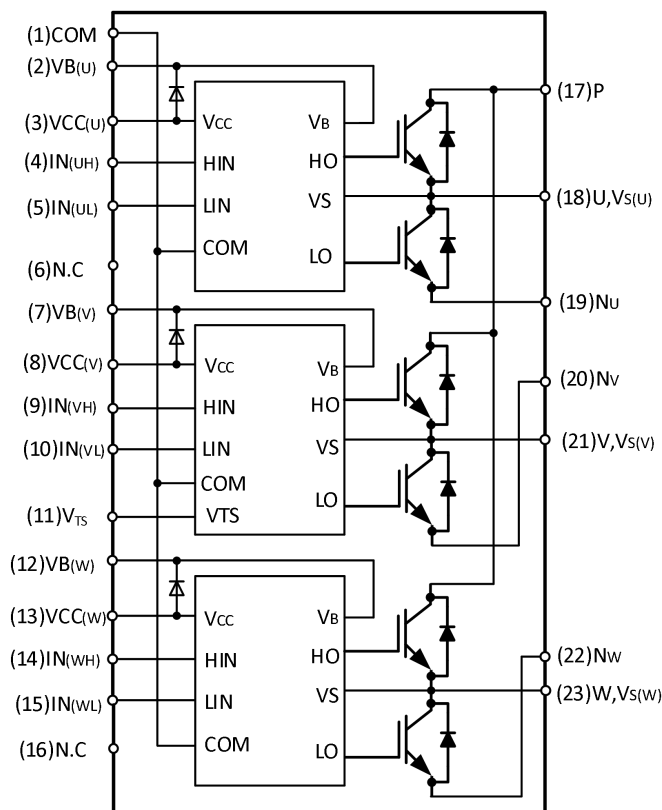

4 Ordering Guide

Part Number	LOGO	Package	Package	SPQ
NSMB05S60B1	 NSMB05S60B1 XXXXXX	SOP23	Tape & Reel	500

5 Revision history

Version	Content	Time
V1.0	Create	2022.10.10

INDEX

1 FEATURES AND BENEFITS	1
2 TYPICAL APPLICATIONS	1
3 DESCRIPTION	1
3.1 CHARACTERISTIC	1
3.2 CHIP INFORMATION	1
4 ORDERING GUIDE	2
5 REVISION HISTORY	2
6 FUNCTION PIN DESCRIPTION	4
7 PRODUCT SPECIFICATIONS	5
7.1 ABSOLUTE MAXIMUM RATINGS	5
7.2 RECOMMENDED OPERATING CONDITIONS	5
7.3 ELECTRICAL CHARACTERISTICS	6
8 NSMB05S60B1 DESCRIPTION	8
9 PACKAGE INFORMATION	9

6 Function Pin Description

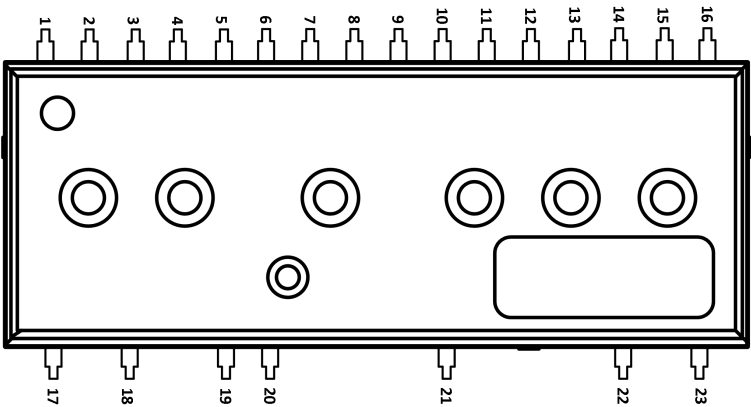


Figure6-1 23-Pin Top view

Table6-1 Lead Definitions

Number	Symbol	Description
1	COM	IC Common Supply Ground
2	$V_{B(U)}$	Bias Voltage for U-Phase High-Side IGBT Driving
3	$V_{CC(U)}$	Bias Voltage for U-Phase IC and Low-Side IGBT Driving
4	$IN_{(UH)}$	Signal Input for U-Phase High-Side
5	$IN_{(UL)}$	Signal Input for U-Phase Low-Side
6	N.C	No Connection
7	$V_{B(V)}$	Bias Voltage for V-Phase High Side IGBT Driving
8	$V_{CC(V)}$	Bias Voltage for V-Phase IC and Low Side IGBT Driving
9	$IN_{(VH)}$	Signal Input for V-Phase High-Side
10	$IN_{(VL)}$	Signal Input for V-Phase Low-Side
11	V_{TS}	Output for HVIC Temperature Sensing
12	$V_{B(W)}$	Bias Voltage for W-Phase High-Side IGBT Driving
13	$V_{CC(W)}$	Bias Voltage for W-Phase IC and Low-Side IGBT Driving
14	$IN_{(WH)}$	Signal Input for W-Phase High-Side
15	$IN_{(WL)}$	Signal Input for W-Phase Low-Side
16	N.C	No Connection
17	P	Positive DC-Link Input
18	$U, V_{S(U)}$	Output for U-Phase & Bias Voltage Ground for High-Side IGBT Driving
19	N_U	Negative DC-Link Input for U-Phase
20	N_V	Negative DC-Link Input for V-Phase
21	$V, V_{S(V)}$	Output for V-Phase & Bias Voltage Ground for High-Side IGBT Driving
22	N_W	Negative DC-Link Input for W-Phase
23	$W, V_{S(W)}$	Output for W Phase & Bias Voltage Ground for High-Side IGBT Driving

7 Product specifications

7.1 Absolute Maximum Ratings

Exceeding the limit maximum rating may cause permanent damage to the device. All voltage parameters are rated with reference to COM and an ambient temperature of 25°C.

Inverter Part (each MOSFET unless otherwise specified)

Symbol	Definition	Conditions	Rating	Units
V_{CES}	Collector-Emitter Voltage of Each IGBT		600	V
I_C	Each IGBT Collector Current, Continuous	$T_C = 25^\circ\text{C}$	6.0	A
I_{CP}	Each IGBT Pulse Current, Peak	$T_C = 25^\circ\text{C}$, Less than 1ms	15.0	A
P_C	Collector Power Dissipation	$T_C = 25^\circ\text{C}$ For each IGBT	28	W

Control Part (each HVIC unless otherwise specified)

Symbol	Definition	Conditions	Rating	Units
V_{CC}	Control Supply Voltage	Applied between V_{CC} and COM	20	V
V_{BS}	High-side Bias Voltage	Applied between V_B and V_S	20	V
V_{IN}	Input Signal Voltage	Applied between V_{IN} and COM	$-0.3 \sim V_{CC} + 0.3$	V

Bootstrap Diode Part (each bootstrap diode unless otherwise specified)

Symbol	Definition	Conditions	Rating	Units
V_{RRMB}	Maximum Repetitive Reverse Voltage		600	V
I_{FB}	Forward Current	$T_C = 25^\circ\text{C}$	0.25	A
I_{FPB}	Forward Peak Current, Peak	$T_C = 25^\circ\text{C}$, Under 1ms Pulse Width	0.5	A

Total System

Symbol	Definition	Conditions	Rating	Units
T_J	Operating Junction Temperature		$-40 \sim 150$	$^\circ\text{C}$
T_{STG}	Storage Temperature		$-40 \sim 150$	$^\circ\text{C}$
V_{ISO}	Isolation Voltage	60Hz, Sinusoidal, 1 minute, Connect Pins to Heat-Sink Plate	1500	Vrms

Thermal Resistance

Symbol	Definition	Conditions	Rating	Units
$R_{\theta JC}$	Junction to Case Thermal resistance	Each IGBT under Inverter Operating Condition	7.1	$^\circ\text{C}/\text{W}$

Note1: To insure safe operation of the IPM, the average junction temperature should be limited to $T_J \leq 150^\circ\text{C}$ ($@T_C \leq 100^\circ\text{C}$).

7.2 Recommended Operating Conditions

Symbol	Parameter	Condition	MIN.	TYP.	MAX.	Units
V_{PN}	Supply Voltage	Applied between P and N	-	300	400	V
V_{CC}	Control Supply Voltage	Applied between V_{CC} and COM	10		18.5	V
V_{BS}	High-Side Bias Voltage	Applied between V_B and V_S	10		18.5	V
$V_{IN(ON)}$	Input ON Threshold Voltage	Applied between V_{IN} and COM	3.0	-	V_{CC}	V
$V_{IN(OFF)}$	Input OFF Threshold Voltage		0	-	0.6	V
t_{dead}	Blanking Time for Preventing Arm-Short	$V_{CC} = V_{BS} = 13.5 \sim 16.5 \text{ V}$, $T_J < 150^\circ\text{C}$	1.0	-	-	us
f_{PWM}	PWM Switching Frequency	$T_J < 150^\circ\text{C}$	-	15	-	KHz

7.3 Electrical Characteristics

Valid for temperature range at $T_A = 25^\circ\text{C}$, unless otherwise specified

Inverter Part(each MOSFET unless otherwise specified)

Symbol	Parameter	Condition	MIN.	TYP.	MAX.	Units
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$V_{GE} = 0\text{ V}$, $I_{CE} = 250\text{ uA}$	600	-	-	V
I_{CES}	Collector-Emitter Leakage Current	$V_{GE} = 0\text{ V}$, $V_{CE} = 600\text{ V}$	-	-	1	uA
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 2.5\text{ A}$	-	1	-	V
		$I_C = 5\text{ A}$	-	1.45	1.9	V
V_{FM}	Diode Forward Voltage	$I_F = 5\text{ A}$	-	2	2.8	V
t_{ON}	Switching Times	$V_{CE} = 400\text{ V}$, $V_{CC} = V_{BS} = 15\text{ V}$, $I_C = 5\text{ A}$ $I_N = 0\text{ V} \leftrightarrow 5\text{ V}$, Inductive Load	-	1020	-	ns
t_{OFF}			-	620	-	ns
E_{ON}			-	60	-	uJ
E_{OFF}			-	50	-	uJ

Control Part(each HVIC unless otherwise specified)

Symbol	Parameter	Condition	MIN.	TYP.	MAX.	Units
I_{QCC}	Quiescent VCC Supply Current	$V_{CC} = 15\text{ V}$ $V_{IN} = 0\text{ V}$	-	100	220	uA
I_{QBS}	Quiescent VB Supply Current	$V_{BS} = 15\text{ V}$ $V_{IN} = 0\text{ V}$	-	50	100	uA
V_{CCD}	Low-side UVLO threshold	VCC Under-Voltage Protection Detection Level	-	7.7	-	V
V_{CCR}		VCC Under-Voltage Protection Reset Level	-	8.7	-	V
V_{BSD}	High-side UVLO threshold	VBS Under-Voltage Protection Detection Level	-	7.7	-	V
V_{BSR}		VBS Under-Voltage Protection Reset Level	-	8.7	-	V
V_{TS}	HVIC Temperature Sensing Voltage Output	$V_{CC} = 15\text{ V}$, $T_{HVIC} = 25^\circ\text{C}$	320	650	900	mV
V_{IH}	ON Threshold Voltage	Logic HIGH Level	-	-	2.6	V
V_{IL}	OFF Threshold Voltage	Logic LOW Level	0.8	-	-	V

Control Part(each bootstrap diode unless otherwise specified)

Symbol	Parameter	Condition	MIN.	TYP.	MAX.	Units
VF	BSD Forward voltage	$I_F = 0.1\text{ A}$, $T_C = 25^\circ\text{C}$	-	2.8	-	V
t_{rrB}	Reverse Recovery Time	$I_F = 0.1\text{ A}$, $T_C = 25^\circ\text{C}$	-	110	-	ns
R	BSD Current Limiting Resistor		-	100	-	ohm

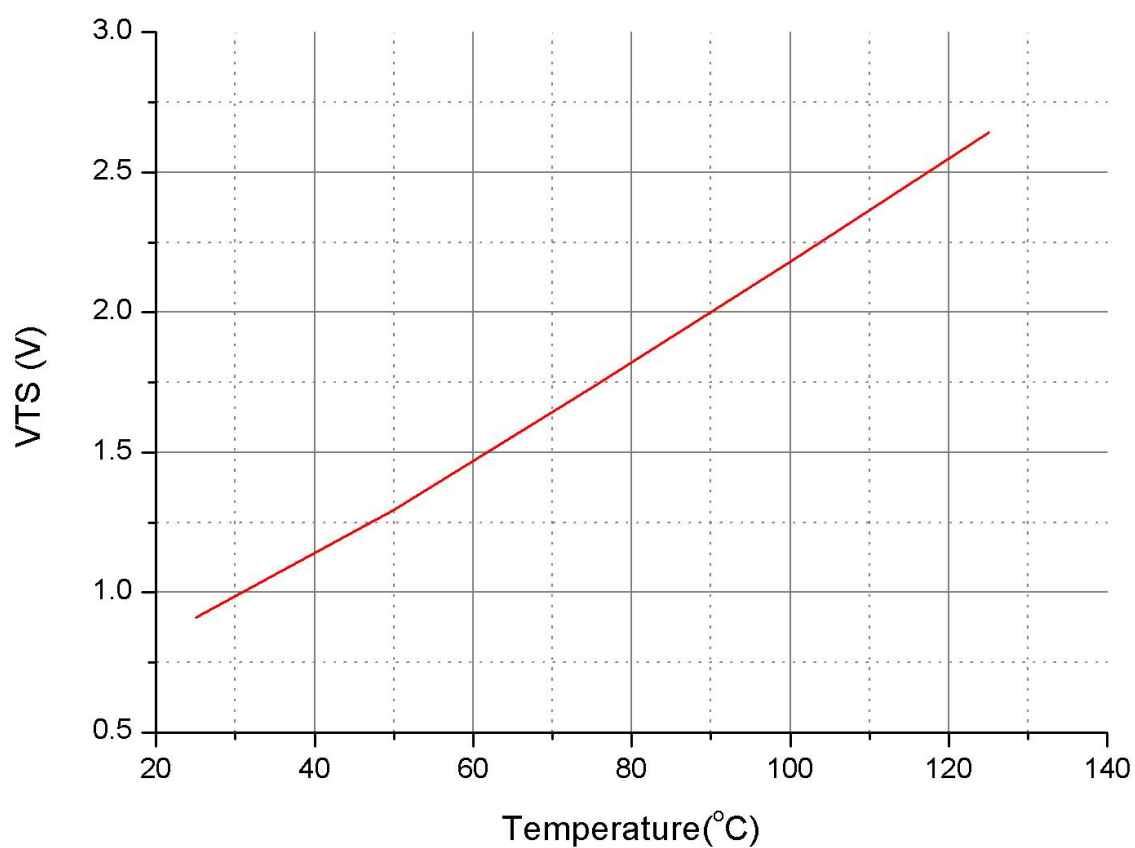


Figure7-1 Temperature Profile of V_{TS} (Typical)

8 NSMB05S60B1 Description

Typical application circuit

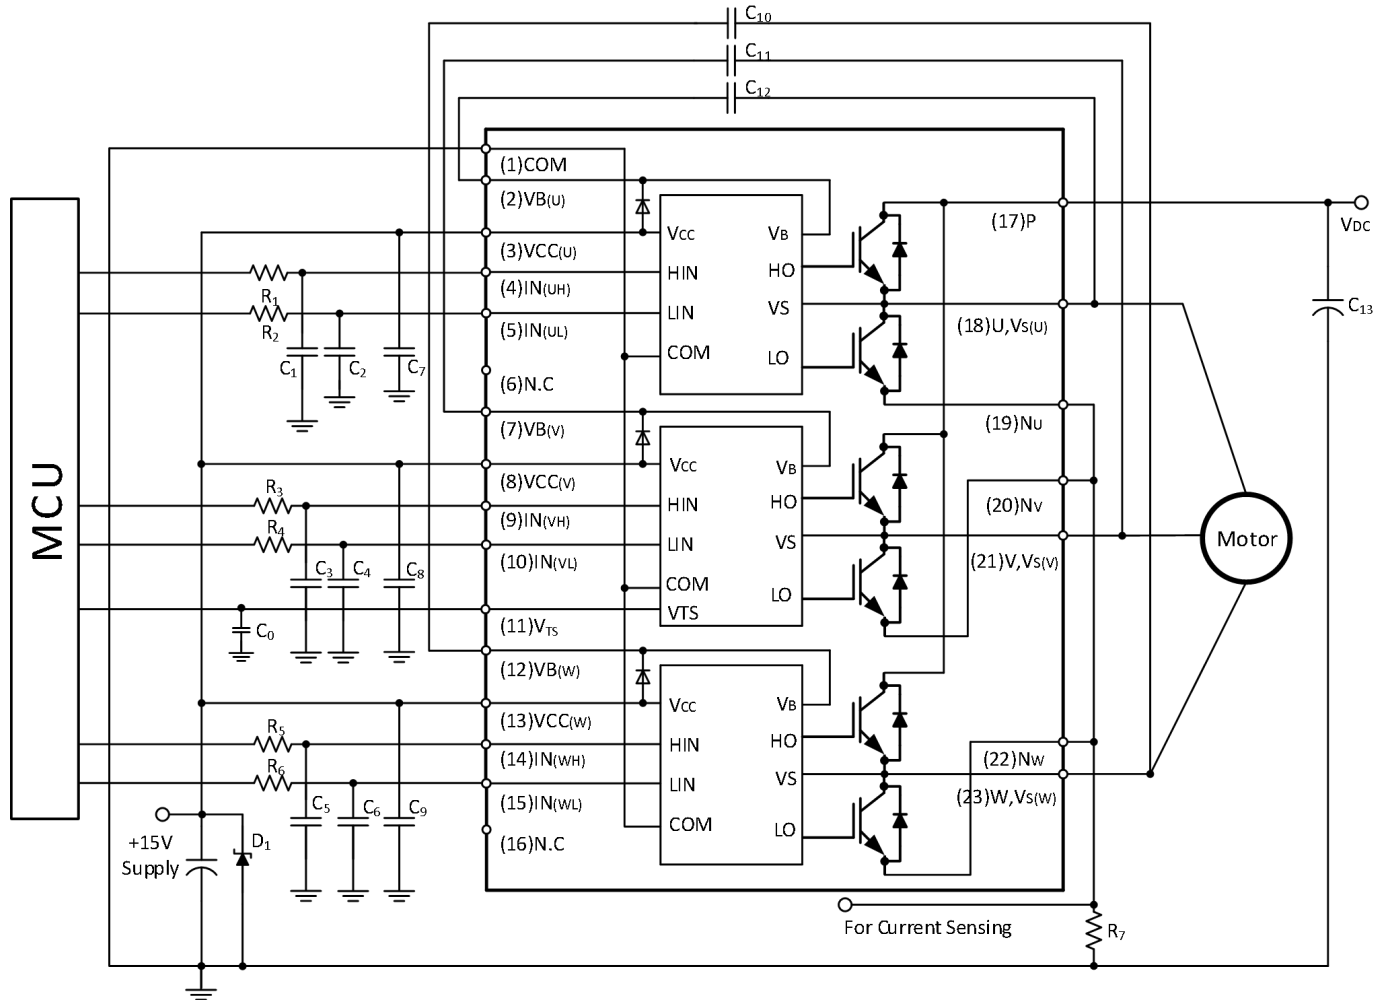


Figure8-1 Example of RC-coupling parameter 390 ohm and 1nF
Recommended Application Circuit and MCU Interface with parameter

Notes:

1. RC-coupling ($R_1 - R_6$ and $C_0 - C_6$) at each input of IPM product and MCU are useful to prevent improper input signal caused by controller scheme and /or surge-noise.
2. All the filter capacitors should be connected close to IPM product, and they should have good characteristics for rejecting high-frequency ripple current.

9 Package Information

SOP23 Package Outlines

